
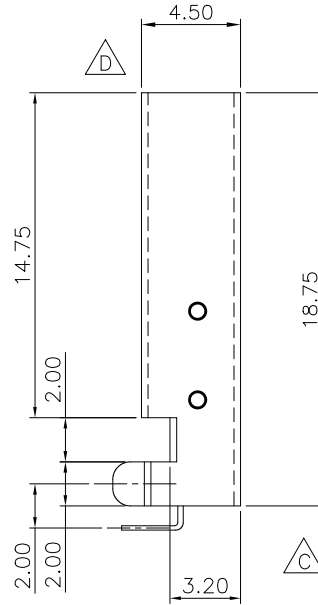
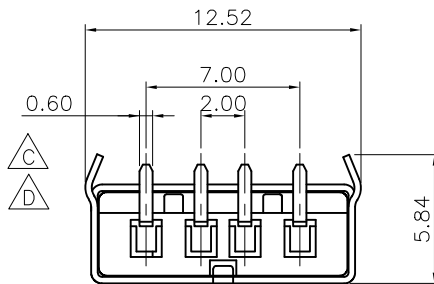


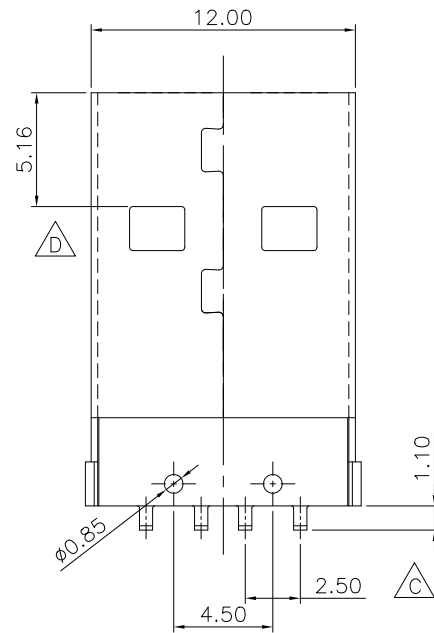


Specifications:
 Current Rating: 1.5 Amps AC/DC
 Voltage Rating: 30V AC/DC
 Withstanding Voltage: 500V AC
 Contact Resistance: 30m ohm max
 Insulation Resistance: 1000M ohm min
 Temperature Range: -25°C ~ 125°C

Material:
 Insulator: High Temp. Plastic (UL94V-0)
 Insulator Color: Black
 Contact: Copper Alloy
 Shell: SPCC

Finish:
 Shell: Nickel Plated
 Contact: Gold Plated Contact Area, Tin Plated On Solder Tail.

How To Order
 5075ARP-04
 4 Pin
 A Type R/A Male

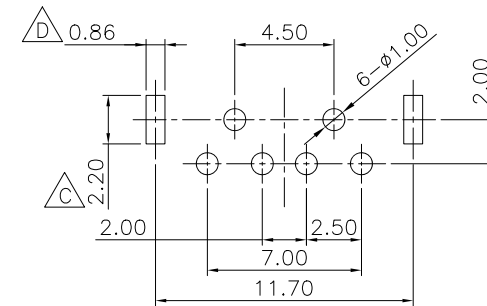

PCB Layout

RoHS Compliant

F				DRAWN: Jamie Wang	GENERAL TOLERANCE: .X=±0.30 .XX=±0.20	 Neltron Industrial Co., Ltd.	D	
E								
D	27-Mar-2024	Modify Product Form	Lucy Du	CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: USB A MALE R/A TYPE		SIZE A4
C	22-Aug-2023	Update DWG.	Lucy Du		SCALE: 1:1			
B	15-Apr-2020	Combine Packing	Jerry Chen	APPROVAL: Mike Wu	SHEET: 1/2	PART NO: 5075ARP-04		
A	07-Sep-2018	(PC0604)	Jamie Wang		PROJECTION: 			
REV	DATE	FILE	BY					