



Specifications:
 Current Rating: 1.0 AC,DC
 Voltage Rating: 30V AC,DC
 Contact Resisitance: 100m ohm.Max
 Insulation resistance: 30Mohm min.
 Withstanding Voltage: 100V AC/Minute
 Operating Temperature: -40°C ~ +105°C


Material and Finish
 Insulator: LCP (UL94V-0)
 Insulator Color:Black
 Contact: Phosphor Bronze
 Plated: 1u" Gold Plated on Contact Area,
 Gold Flash On Solder Tail,
 Nickel Under Plated Overall.
 Shell: Stainless Steel, Nickel Plated

How To Oarder
 5075MBS-05-SMAA-CR
 └ Cap+Tape&Reel
 └ SMD Type
 └ No of Contacts
 └ Micro USB B Type Socket Straight

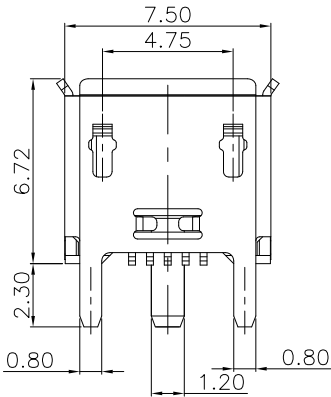


PIN ASSIGNMENT

PIN	NAME
1	VBUS
2	D-
3	D+
4	ID
5	GND

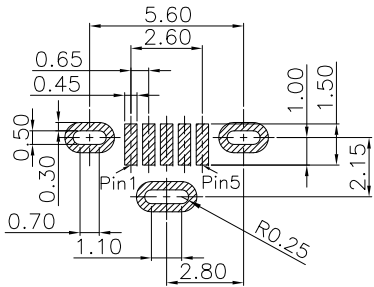

P.C.B Layout
 GENERAL TOLERANCES:±0.05

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				SELIN	.X=±0.30 .XX=±0.20		
D				CHECKED:	UNIT: MM	DESCRIPTION: Micro USB B 5P Socket Straight SMD Type L=6.1	
C				JERRY	SCALE: 1:1		
B				APPROVAL:	SHEET: 1/2	PART NO: 5075MBS-05-SMAA-CR	
A	19-APR-2022	(PC0604)	SELIN	RORY	PROJECTION: 		
REV	DATE	FILE	BY				SIZE A4