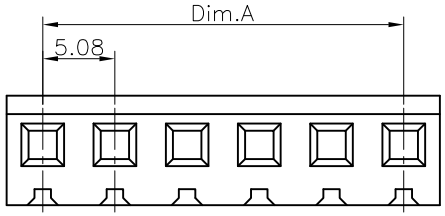

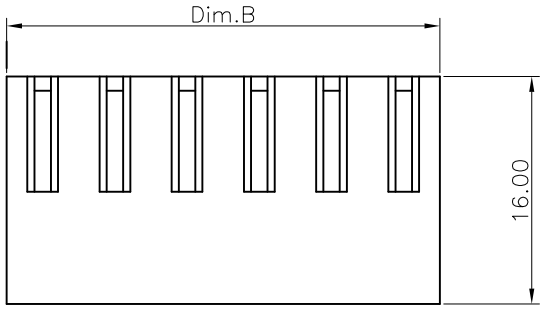

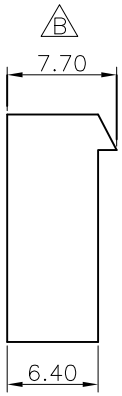

B

Specifications:
Current Rating: 5.0A AC,DC
Voltage Rating: 250V AC,DC
Contact Resisitance: 10m ohm.Max
Insulation Resisitance: 1000M ohm.Min
Withstanding Voltage: 1500V AC/Minute
Operating Temperature Range:−25°C ~ +85°C

Material:
Insulator: Nylon 66(UL94V−2)

How To Order
5198H−XX
- XX: NO. of Contacts
- H: H:Housing

B

Pin No.	Dim.A	Dim.B
2	5.08	10.16
3	10.16	15.24
4	15.24	20.32
5	20.32	25.40
6	25.40	30.48
7	30.48	35.56
8	35.56	40.64
9	40.64	45.72
10	45.72	50.80

寶德股份有限公司
發行日期
2022/03/17
文件管制章
DCC

RoHS Compliant

REV	DATE	FILE	BY
F			
E			
D			
C			
B	15−MAR−2022	B	MEI
A	21−NOV−2006	(P0257)	MARY

DRAWN: MARY
CHECKED: JEREMY
APPROVAL: MIKE

GENERAL TOLERANCE:
.X=±0.50
.XX=±0.30 B

UNIT: MM
SCALE:
SHEET: 1/1
PROJECTION:

Neltron Connectors **Neltron Industrial Co., Ltd.**

DESCRIPTION: 5.08mm Housing

PART NO: 5198H−XX

SIZE **A4**