
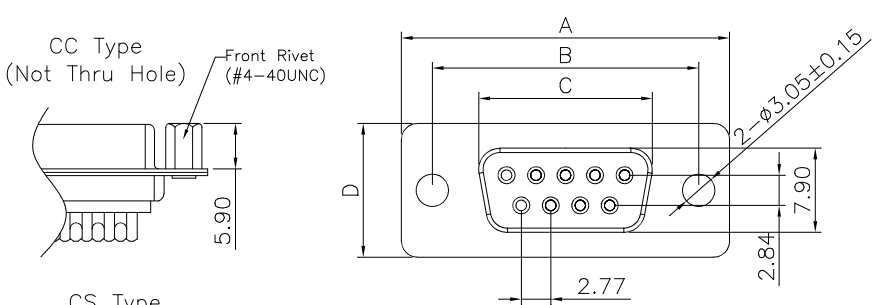
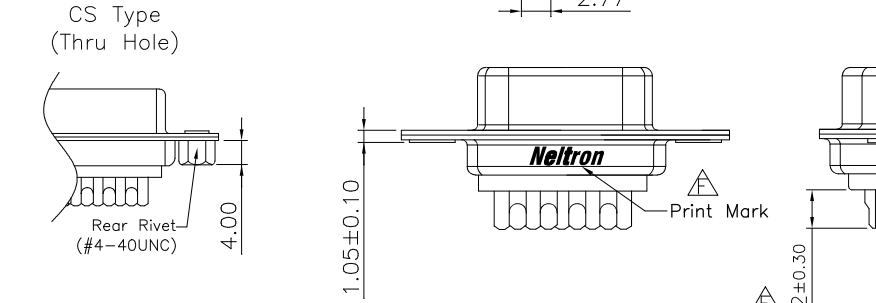
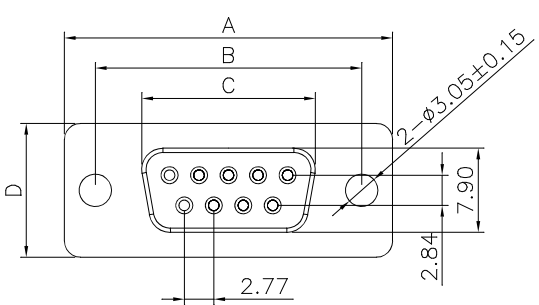


1		2		3		4		5																																																																					
CC Type (Not Thru Hole) 		CS Type (Thru Hole) 				Specifications: Current rating:1.0A Max. Voltage rating:250V AC,DC Contact resistance:30m ohm max. Insulation resistance: 1,000M ohm min at DC 500V. Withstanding voltage:500V AC/Minute. Operating Temperature range:-55°C ~ +105°C Materials: Insulator:PBT (UL94V-0) Contact:Brass,T=0.20mm,Gold Plated. Shell:Cold Rolled Steel,T=0.35mm,Nickel Plated.		How To Order 5501-XXSA-XX-XX-XX-X Blank Without Mark P:Print Mark Blank:White(Standard Color) BK:Black BU:Blue Blank:Standard type CS:Rear Rivet CC:Front Rivet 01:Full Gold Plated 02:Selective Gold Plated 0201:Contact 1u" Gold Plated 0203:Contact 3u" Gold Plated 0205:Contact 5u" Gold Plated 0208:Contact 8u" Gold Plated 0210:Contact 10u" Gold Plated 0215:Contact 15u" Gold Plated 0230:Contact 30u" Gold Plated SA:Stamp Pin Female No. of Contacts																																																																					
<table><tr><td>6</td><td>NUT</td><td>2</td><td>Brass</td><td>H4.75*8.0*5.8</td><td>Nickel Plashed</td></tr><tr><td>5</td><td>3B NUT</td><td>2</td><td>Brass</td><td>H4.75*5.5*4.0</td><td>Nickel Plashed</td></tr><tr><td>4</td><td>Back-shell</td><td>1</td><td>Cold Rolled steel</td><td>T=0.30mm</td><td>Tin Plashed</td></tr><tr><td>3</td><td>Front-shell</td><td>1</td><td>Cold Rolled steel</td><td>T=0.35mm</td><td>Nickel Plashed</td></tr><tr><td>2</td><td>Contact</td><td>9-37</td><td>Brass</td><td>T=0.20mm</td><td>Gold Flashed</td></tr><tr><td>1</td><td>Plastic</td><td>1</td><td>PBT</td><td>UL 94-V0</td><td>Black/White</td></tr><tr><td>No.</td><td>Part Name</td><td>Q'ty</td><td>Material</td><td>Material thickness &Remarks</td><td>Finish</td></tr></table>		6	NUT	2	Brass	H4.75*8.0*5.8	Nickel Plashed	5	3B NUT	2	Brass	H4.75*5.5*4.0	Nickel Plashed	4	Back-shell	1	Cold Rolled steel	T=0.30mm	Tin Plashed	3	Front-shell	1	Cold Rolled steel	T=0.35mm	Nickel Plashed	2	Contact	9-37	Brass	T=0.20mm	Gold Flashed	1	Plastic	1	PBT	UL 94-V0	Black/White	No.	Part Name	Q'ty	Material	Material thickness &Remarks	Finish	<table><tr><td>Pos</td><td>A±0.20</td><td>B±0.20</td><td>C±0.15</td><td>D±0.25</td></tr><tr><td>9</td><td>30.80</td><td>25.00</td><td>16.35</td><td>12.55</td></tr><tr><td>15</td><td>39.20</td><td>33.32</td><td>24.70</td><td>12.55</td></tr><tr><td>25</td><td>53.05</td><td>47.04</td><td>38.40</td><td>12.55</td></tr><tr><td>37</td><td>69.40</td><td>63.50</td><td>54.80</td><td>12.55</td></tr><tr><td>50</td><td colspan="4">see page 2</td></tr></table>		Pos	A±0.20	B±0.20	C±0.15	D±0.25	9	30.80	25.00	16.35	12.55	15	39.20	33.32	24.70	12.55	25	53.05	47.04	38.40	12.55	37	69.40	63.50	54.80	12.55	50	see page 2				RoHS Compliant	
6	NUT	2	Brass	H4.75*8.0*5.8	Nickel Plashed																																																																								
5	3B NUT	2	Brass	H4.75*5.5*4.0	Nickel Plashed																																																																								
4	Back-shell	1	Cold Rolled steel	T=0.30mm	Tin Plashed																																																																								
3	Front-shell	1	Cold Rolled steel	T=0.35mm	Nickel Plashed																																																																								
2	Contact	9-37	Brass	T=0.20mm	Gold Flashed																																																																								
1	Plastic	1	PBT	UL 94-V0	Black/White																																																																								
No.	Part Name	Q'ty	Material	Material thickness &Remarks	Finish																																																																								
Pos	A±0.20	B±0.20	C±0.15	D±0.25																																																																									
9	30.80	25.00	16.35	12.55																																																																									
15	39.20	33.32	24.70	12.55																																																																									
25	53.05	47.04	38.40	12.55																																																																									
37	69.40	63.50	54.80	12.55																																																																									
50	see page 2																																																																												
<table><tr><td>G</td><td>27-JUN-2023</td><td>Add Blue Option</td><td>Lisy Liu</td><td rowspan="2">DRAWN: Jamie Wang</td><td rowspan="2">GENERAL TOLERANCE: .X=±0.30 Angles=±2° .XX=±0.20 .XXX=±0.10</td></tr><tr><td>F</td><td>15-FEB-2022</td><td>ADD_P</td><td>MEI</td></tr><tr><td>E</td><td>28-APR-2021</td><td>ADD_LENGTH</td><td>Lisy Liu</td><td rowspan="2">CHECKED: Jerry Chen</td><td rowspan="2">UNIT: MM SCALE: 1:1</td></tr><tr><td>D</td><td>26-FEB-2020</td><td>新增包裝圖</td><td>Lisy Liu</td></tr><tr><td>C</td><td>22-JUL-2019</td><td>Add 50P INFO</td><td>Romina Wu</td><td rowspan="2">APPROVAL: Mike Wu</td><td rowspan="3">SHEET: 1/3</td></tr><tr><td>A</td><td>11-AUG-2017</td><td>(PC0613)(PC0621)</td><td>Jamie Wang</td></tr><tr><td>REV</td><td>DATE</td><td>FILE</td><td>BY</td><td colspan="2">PROJECTION:</td></tr></table>		G	27-JUN-2023	Add Blue Option	Lisy Liu	DRAWN: Jamie Wang	GENERAL TOLERANCE: .X=±0.30 Angles=±2° .XX=±0.20 .XXX=±0.10	F	15-FEB-2022	ADD_P	MEI	E	28-APR-2021	ADD_LENGTH	Lisy Liu	CHECKED: Jerry Chen	UNIT: MM SCALE: 1:1	D	26-FEB-2020	新增包裝圖	Lisy Liu	C	22-JUL-2019	Add 50P INFO	Romina Wu	APPROVAL: Mike Wu	SHEET: 1/3	A	11-AUG-2017	(PC0613)(PC0621)	Jamie Wang	REV	DATE	FILE	BY	PROJECTION:		Neltron Connectors Neltron Industrial Co., Ltd.		DESCRIPTION: D-SUB Solder Female Stamp Pin Type PART NO: 5501-XXSA-XX-XX-XX-X		SIZE A4																																			
G	27-JUN-2023	Add Blue Option	Lisy Liu	DRAWN: Jamie Wang	GENERAL TOLERANCE: .X=±0.30 Angles=±2° .XX=±0.20 .XXX=±0.10																																																																								
F	15-FEB-2022	ADD_P	MEI																																																																										
E	28-APR-2021	ADD_LENGTH	Lisy Liu	CHECKED: Jerry Chen	UNIT: MM SCALE: 1:1																																																																								
D	26-FEB-2020	新增包裝圖	Lisy Liu																																																																										
C	22-JUL-2019	Add 50P INFO	Romina Wu	APPROVAL: Mike Wu	SHEET: 1/3																																																																								
A	11-AUG-2017	(PC0613)(PC0621)	Jamie Wang																																																																										
REV	DATE	FILE	BY	PROJECTION:																																																																									

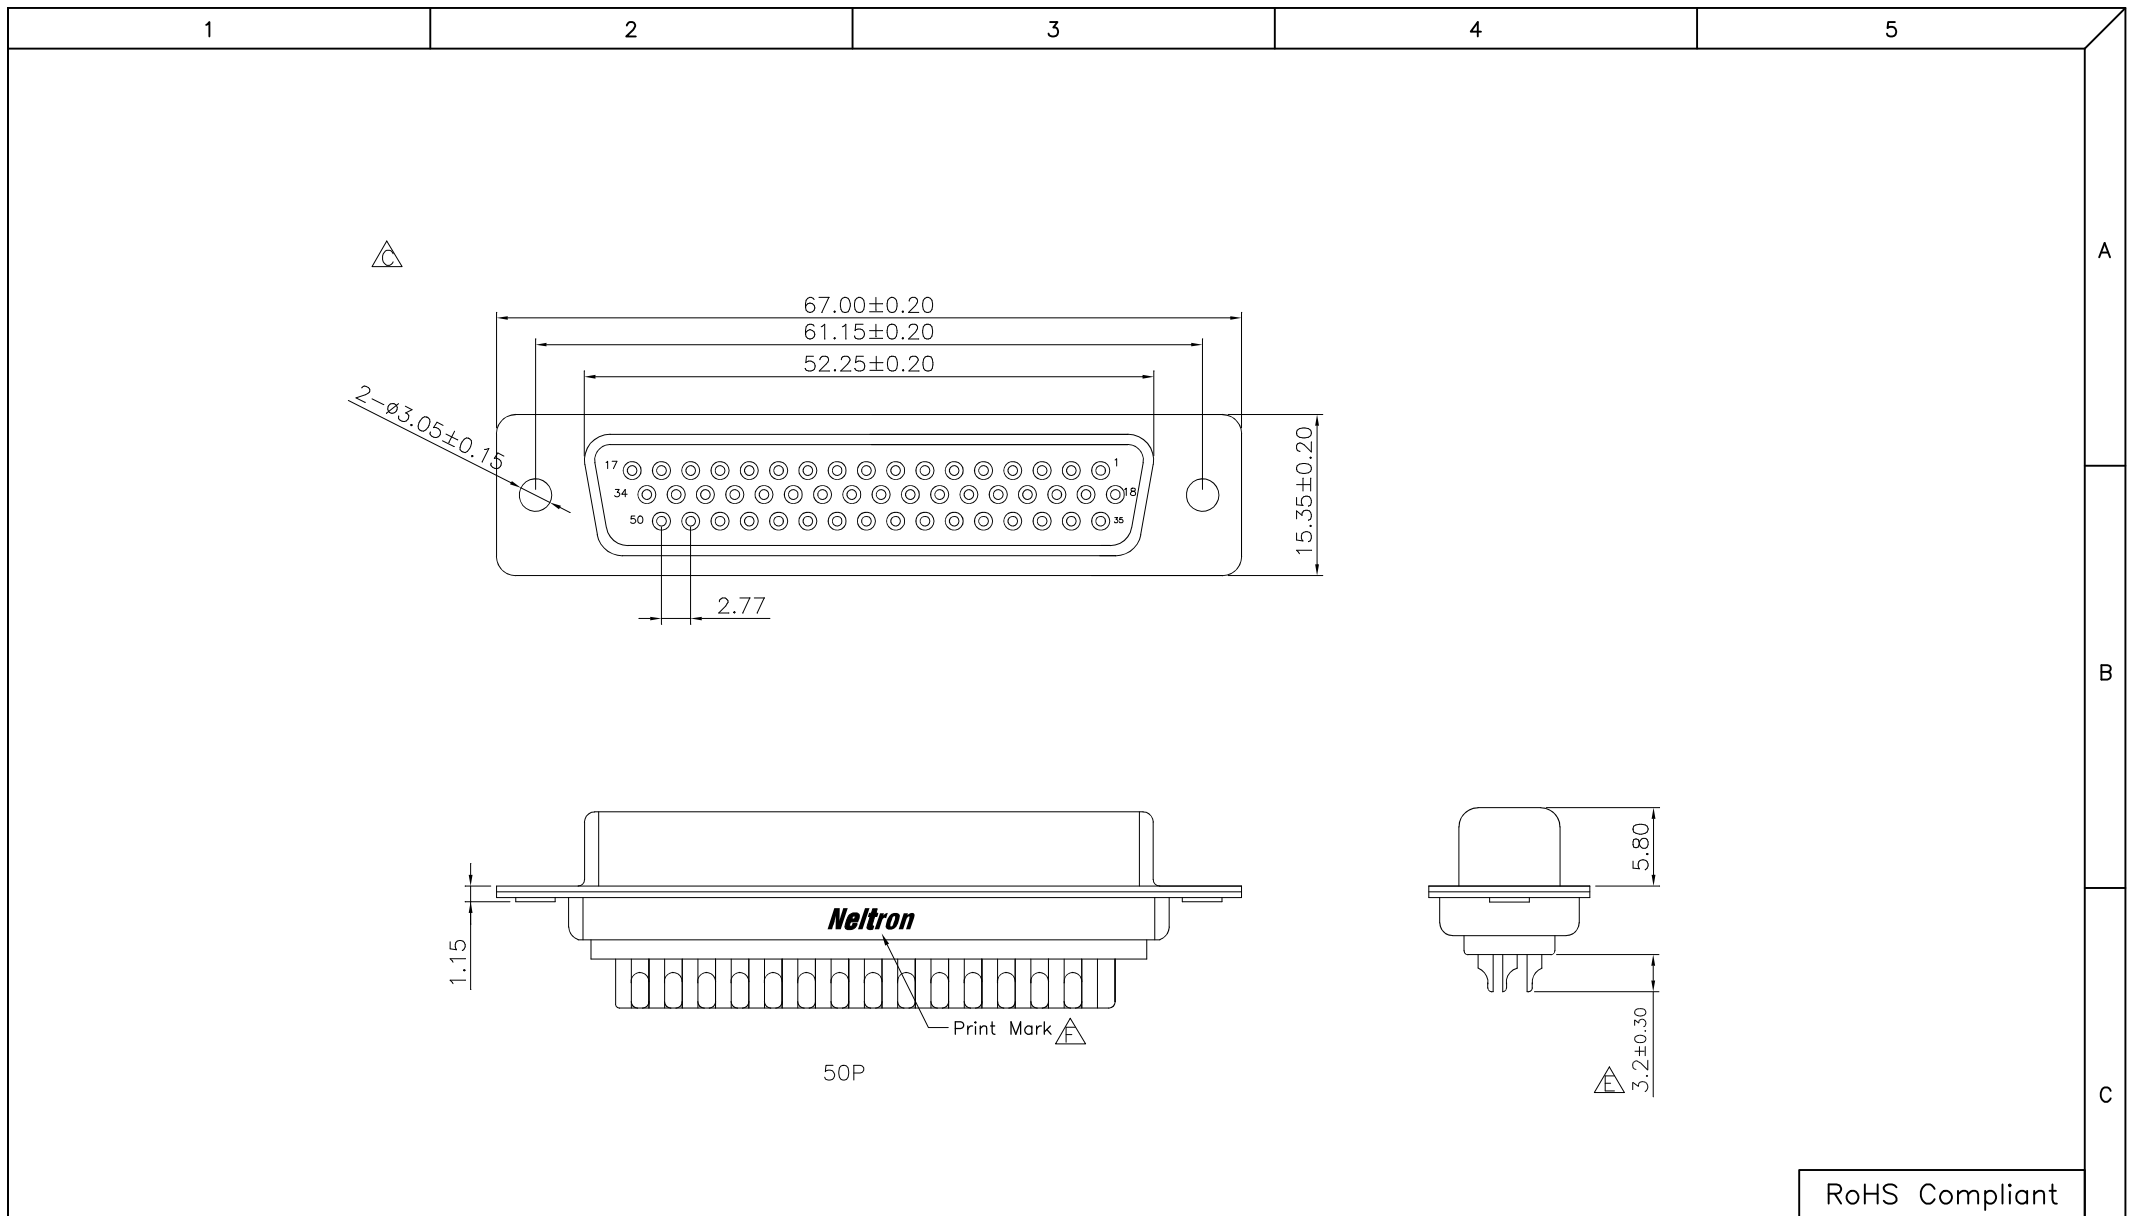

G	27-JUN-2023	Add Blue Option	Lisy Liu	DRAWN: Jamie Wang	GENERAL TOLERANCE: .X=±0.30 Angles=±2° .XX=±0.20 .XXX=±0.10	 Neltron Industrial Co., Ltd.		
F	15-FEB-2022	ADD_P	MEI					
E	28-APR-2021	ADD_LENGTH	Lisy Liu	CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: D-SUB Solder Female Stamp Pin Type	SIZE	
D	26-FEB-2020	新增包裝圖	Lisy Liu					
C	22-JUL-2019	Add 50P INFO	Romina Wu	APPROVAL: Mike Wu	SCALE: 1:1	PART NO: 5501-XXSA-XX-XX-XX-X  	A4	D
A	11-AUG-2017	(PC0613)(PC0621)	Jamie Wang		SHEET: 2/3 			
REV	DATE	FILE	BY	PROJECTION: 