
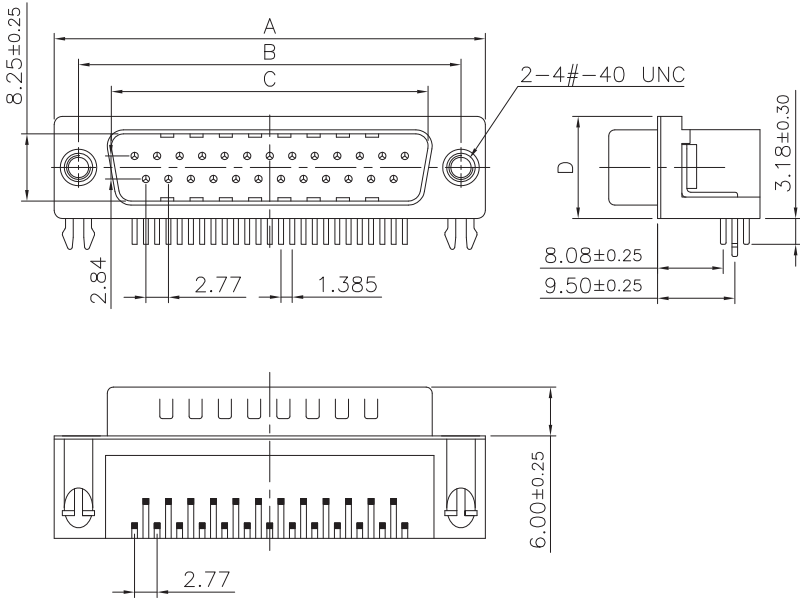


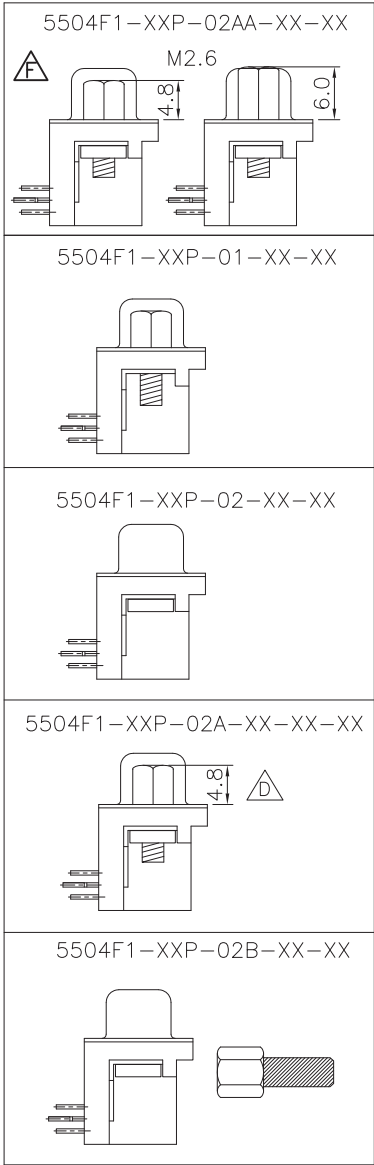

Pos	A±0.35	B±0.25	C±0.25	D±0.25
9	30.81	24.99	16.92	12.55
15	39.14	33.32	25.25	
25	53.04	47.04	38.96	
37	69.40	63.50	55.42	


Specifications:
Current Rating:3.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:30m ohm. max.
Insulation Resistance:1,000M ohm. min.at 500V DC
Withstanding Voltage:500V AC/Minute
Operating Temperature Range:-55°C ~ +105°C

Material and Finish
Insulator:PBT(UL 94V-0)
Contact:Brass
Plating:Gold Plated
Shell:SPCC,Nickel Plated
Board Lock: Brass, Tin Plated

How To Order

5504F1-XXP-XX-XX-XX-X

- Blank W/O Logo
- P:Print Neltron Logo
- Blank Hex Screw height:4.8mm
- H6:Hex Screw height:6.0mm
- 01:Full Gold Plated
- 03:Selective Gold Plated
- 01:Board Lock/Hex Screw
- 02:Rivet W/Board Lock
- 02A:Rivet W/Board Lock /Hex Screw
- 02B:Rivet W/Board Lock/Attached Hex Screw
- 02AA:Rivet W/Board Lock/M2.6 Hex Screw
- P:Male
- No. Of Positions
- 8.08mm Footprint

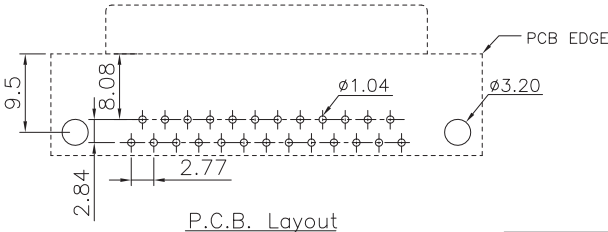

RoHS Compliant

F	23-FEB-2023		Jamie	DRAWN:	GENERAL TOLERANCE:	Neltron Industrial Co., Ltd.	
E	24-NOV-2022	Modify P/N	Lucy	Jamie Wang	.X=±0.20 .XX=±0.15		
D	21-SEP-2022		Lucy	CHECKED:	UNIT: mm	DESCRIPTION: D-SUB Male 8.08mm Footprint Right Angle Type	
C	02-JUN-2021	Modify±0.25	MEI	Jerry Chen	SCALE: 1:1		
B	30-DEC-2020	新增Z字片電鍍	MEI	APPROVAL:	SHEET: 1 / 1	PART NO: 5504F1-XXP-XX-XX-XX-X	
A	27-SEP-2017		Jamie Wang	Mike Wu	PROJECTION:		
REV	DATE	FILE	BY			SIZE A4	