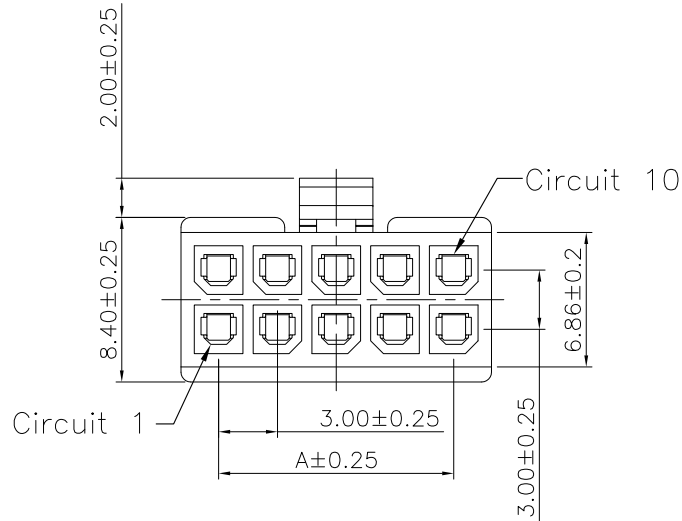


Specifications:

- Current Rating:5.0A AC/DC
- Voltage Rating:250V AC/DC
- Contact Resistance:10m ohm. Max.
- Insulation Resistance:1000M ohm. Min.
- Withstanding Voltage:1.500V AC/Minute
- Operating Temperature Range:-25°C~+105°C



Material:

Insulator:Nylon 66 (UL94V-0)
Insulator Color: Black

How To Order


5560-XX-XX


Blank Halogen
HF:Halogen-Free
F4A:SC21
No. Of Contacts

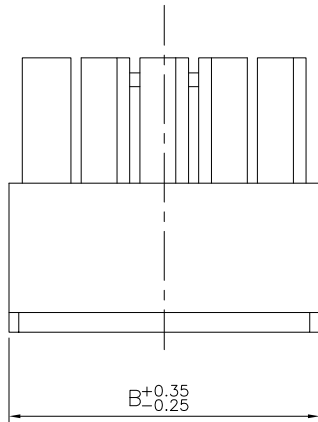

Poles	Dimension		PCS/BAG	Poles	Dimension		PCS/BAG
	A	B			A	B	
02	—	3.85	1,000	14	18.00	21.85	1,000
04	3.00	6.85	1,000	16	21.00	24.85	1,000
06	6.00	9.85	1,000	18	24.00	27.85	1,000
08	9.00	12.85	1,000	20	27.00	30.85	500
10	12.00	15.85	1,000	22	30.00	33.85	500
12	15.00	18.85	1,000	24	33.00	36.85	500

RoHS Compliant

F				DRAWN: BEN	GENERAL TOLERANCE: .X=±0.35 .XX=±0.25	 Neltron Industrial Co., Ltd.	
E							
D	28-NOV-2022		Jamie Chuang	CHECKED: JERRY	UNIT: MM	DESCRIPTION: 3.0mm Power Receptacle Housing	SIZE A4
C	29-JUN-2020	Cancel Material Project	JAMIE		SCALE: 1:1		
B	13-MAY-2020	ECO-TW200003	JAMIE	APPROVAL: RORY	SHEET: 1/2	PART NO: 5560-XX-XX	
A	09-APR-2020	(P0001)	BEN		PROJECTION: 		
REV	DATE	FILE	BY				

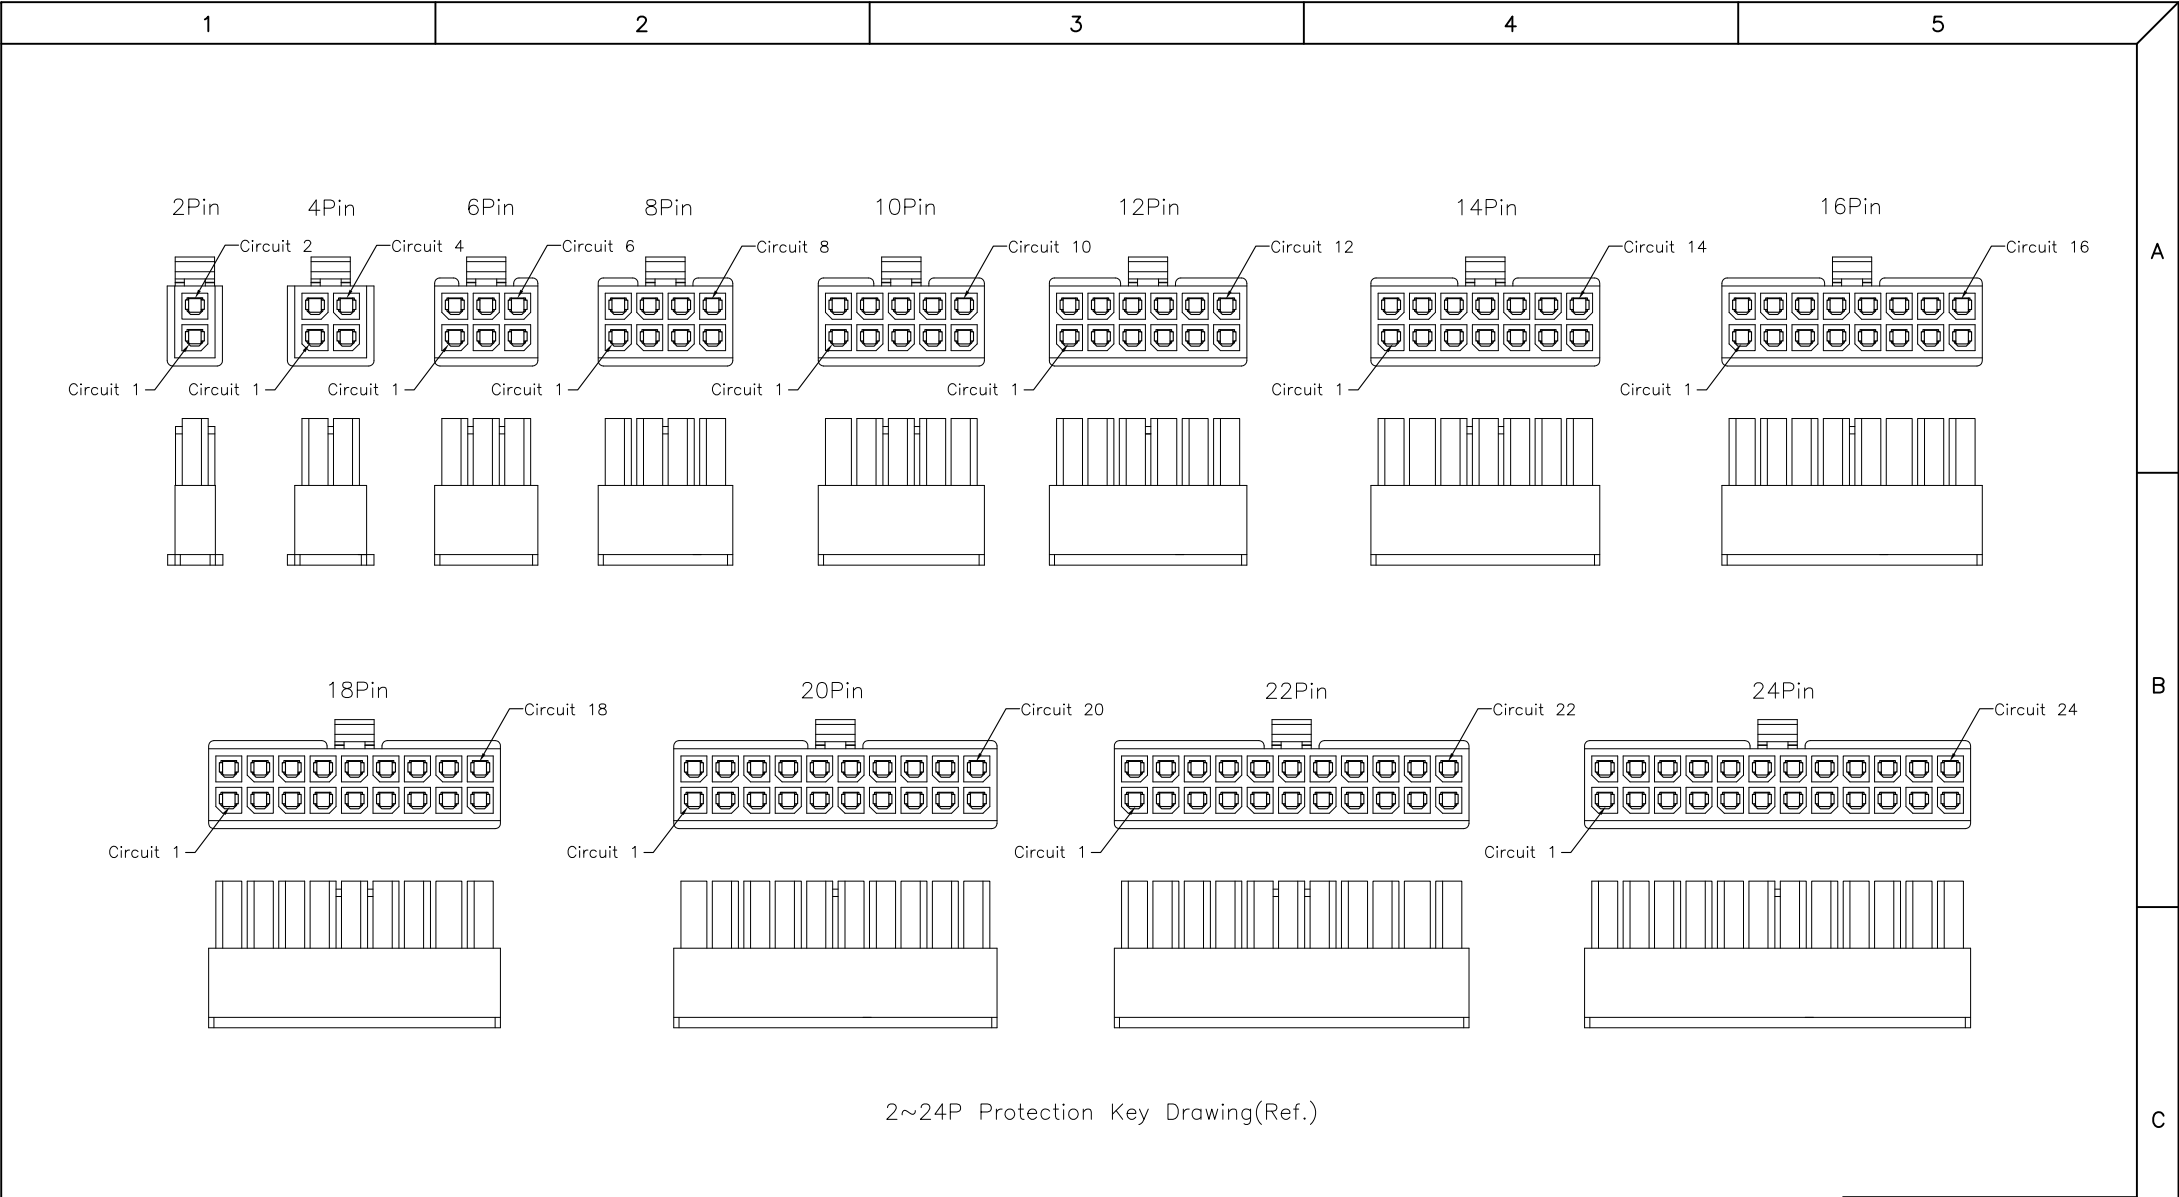

F				DRAWN:	GENERAL TOLERANCE:	Neltron Connectors Neltron Industrial Co., Ltd.	
E				BEN	.X=±0.35 .XX=±0.25		
D	28-NOV-2022	Cancel Material Project	Jamie Chuang	CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	29-JUN-2020		JAMIE	JERRY	SCALE: 1:1	3.0mm Power Receptacle Housing	A4
B	13-MAY-2020	ECO-TW200003	JAMIE	APPROVAL:	SHEET: 2/2	PART NO:	
A	09-APR-2020	(P0001)	BEN	RORY	PROJECTION:	5560-XX-XX	
REV	DATE	FILE	BY				