

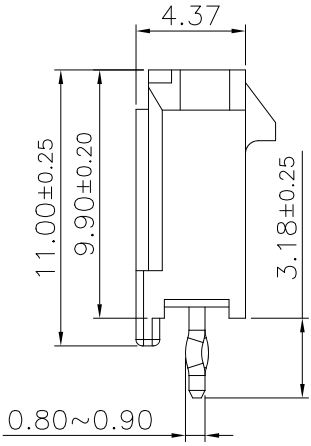
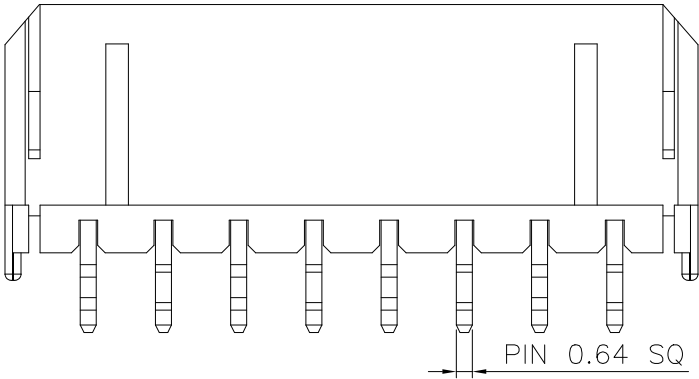


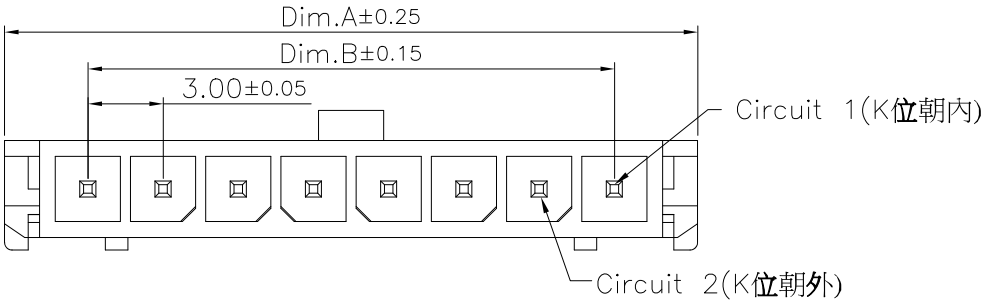


Positions	Dimension		Positions	Dimension	
	A	B		A	B
2	9.65	3.00	8	27.65	21.00
3	12.65	6.00	9	30.65	24.00
4	15.65	9.00	10	33.65	27.00
5	18.65	12.00	11	36.65	30.00
6	21.65	15.00	12	39.65	33.00
7	24.65	18.00			

Specifications:
Current Rating: 5.0A AC/DC
Voltage Rating: 250V AC/DC
Contact Resistance: 10m ohm. Max.
Insulation Resistance: 1,000M ohm. min.
Withstanding Voltage: 1,500V AC For One Minute
Operating Temperature Range: -25°C ~ +105°C





Material and Finish
Insulator: High Temp. Plastic(LCP UL94V-0)
Terminal: Copper Alloy
Plating: Matte Tin/Selective Gold Plated△

How To Order
5561SA-XXX△
Blank Matte Tin Plated△
SG:Gold Plated On Contact Area,△
Matte Tin Plated On Solder Tail
SG15:Gold Plated 15u" On Contact Area,
Matte Tin Plated On Solder Tail
No. of Contacts
SA:Single Row&Straight Type

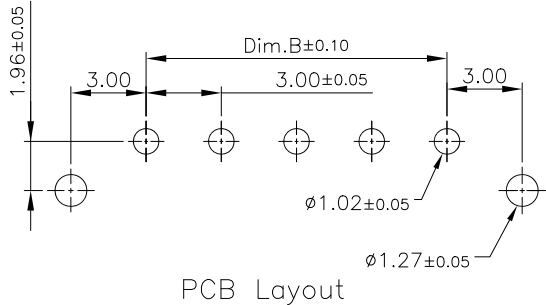

RoHS Compliant

F				DRAWN: Pingchia	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		D
E								
D								
C	19-Feb-2025	Add Plated Option	Yizhen	CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 3.0mm Wafer Single Row Straight Type	SIZE A4	
B	19-Mar-2024	Add Plated Option	Yizhen		SCALE:1:1			
A	18-Oct-2016	(P0001)	Pingchia	APPROVAL: Mike Wu	SHEET: 1 / 2	PART NO: 5561SA-XXX 		
REV	DATE	FILE	BY		PROJECTION: 			

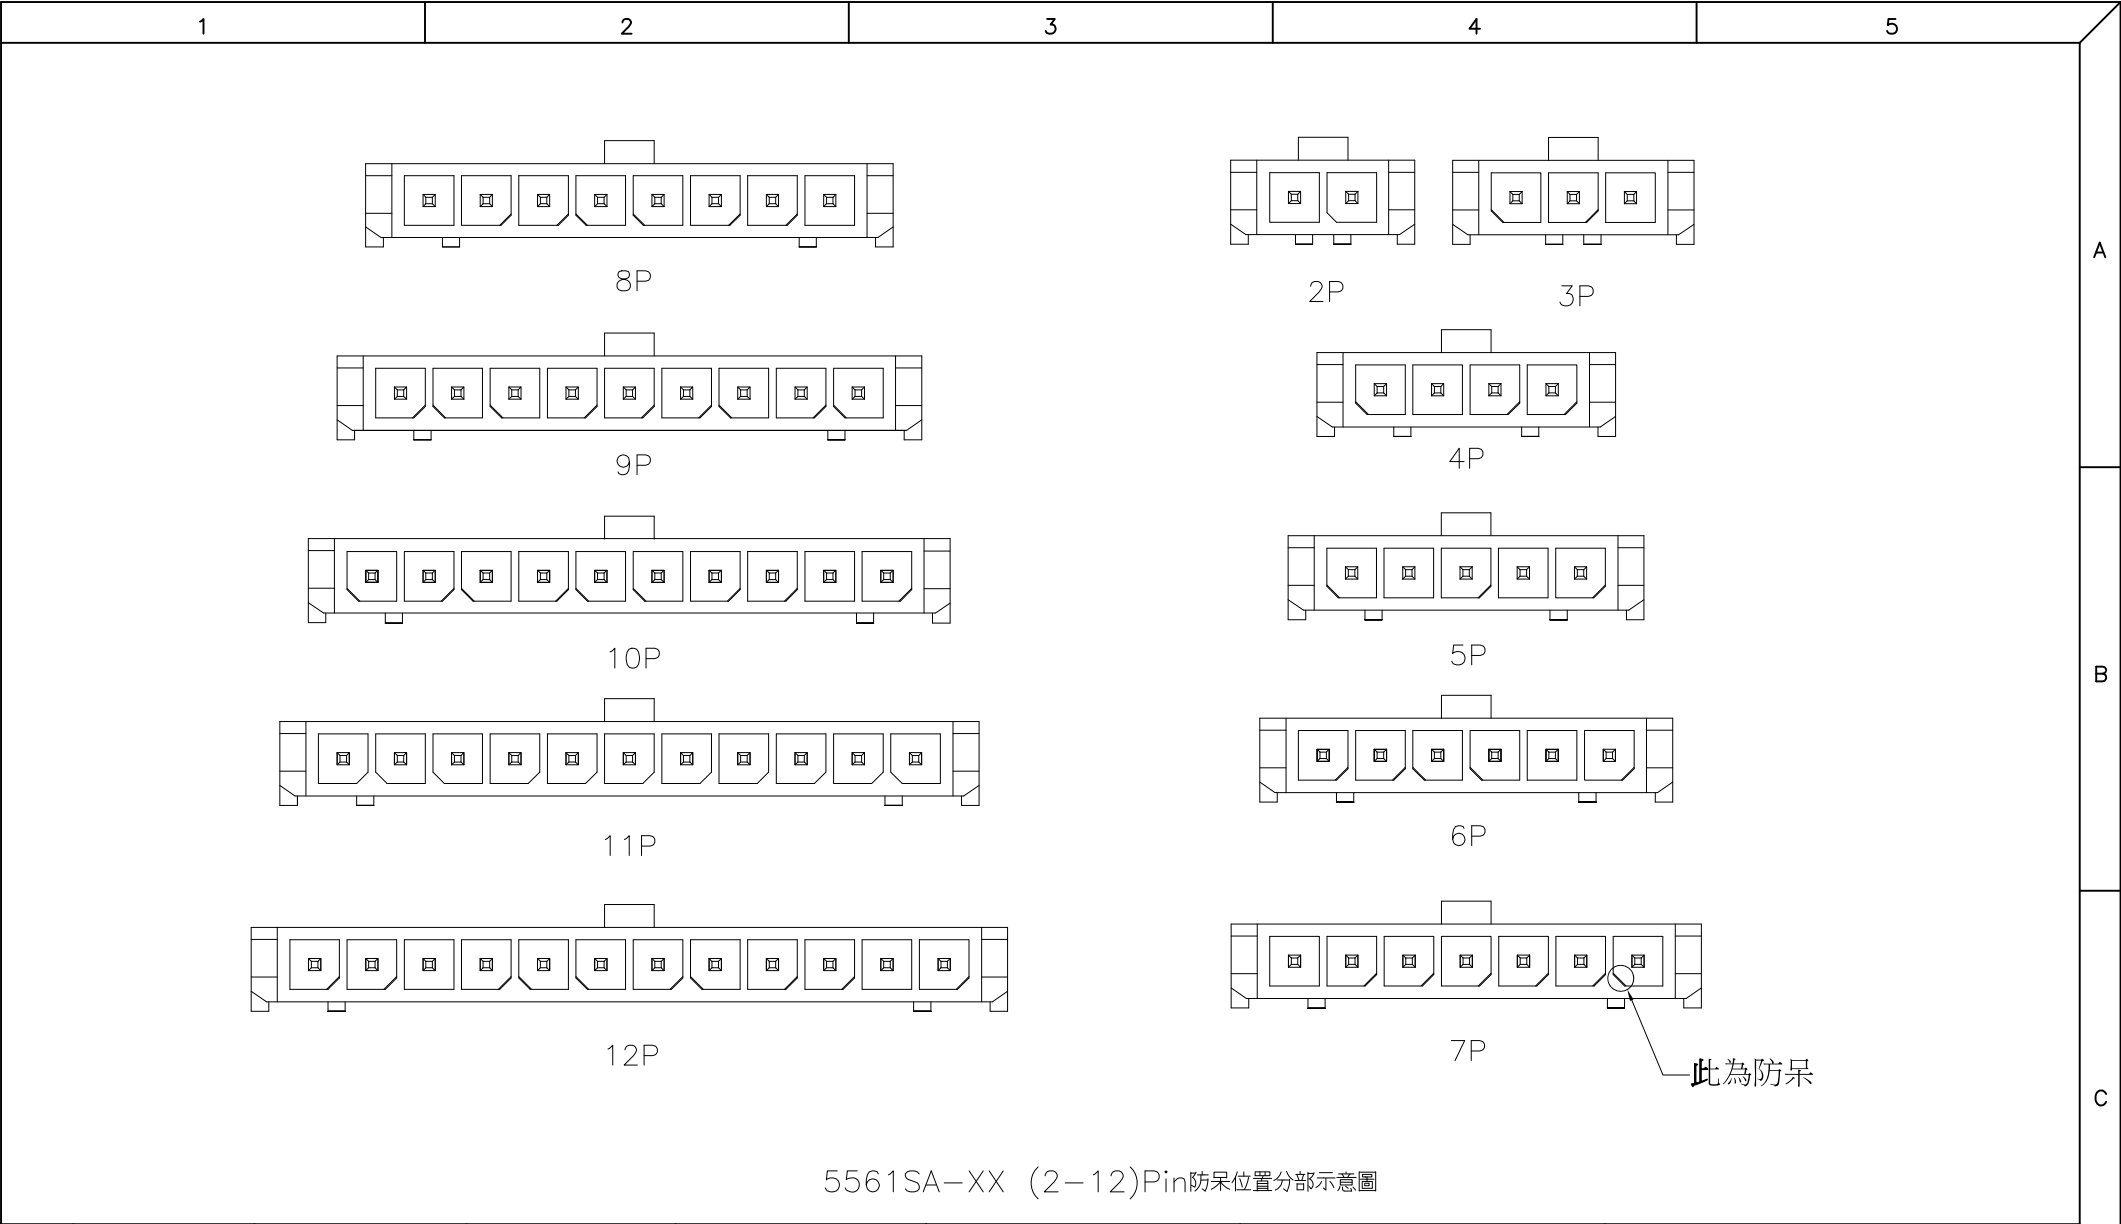

F				DRAWN: Pingchia	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		D
E								
D								
C	19-Feb-2025	Add Plated Option	Yizhen	CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 3.0mm Wafer Single Row Straight Type	SIZE A4	
B	19-Mar-2024	Add Plated Option	Yizhen		SCALE:1:1			
A	18-Oct-2016	(P0001)	Pingchia	APPROVAL: Mike Wu	SHEET: 2/2	PART NO: 5561SA-XXX		
REV	DATE	FILE	BY		PROJECTION: 