
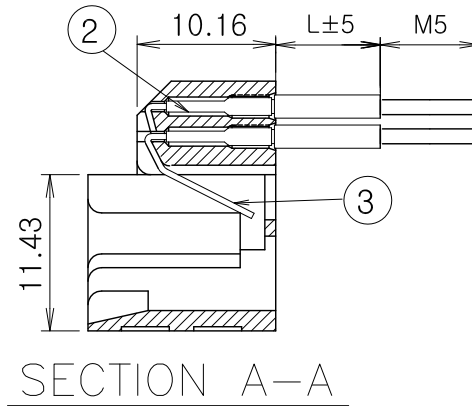
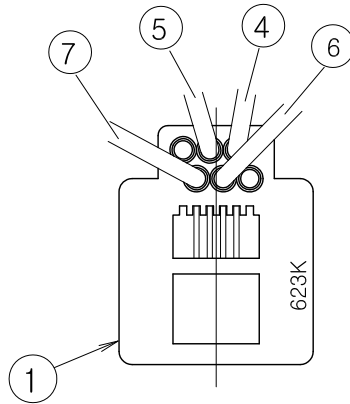



1. GOLD PLATING THICKNESS IS 15 M-IN.
2. FCC TEST CONDITIONS ARE SATISFIED
3. MATERIALS ARE UL APPROVED
(UL NO. E134225)
4. OTHERWISE TOLERANCE:
.0=±0.2 .00=±0.1

7	INSULATION WIRE	PVC	BK	70	AWG26	HI-LAP	UL1061
6	INSULATION WIRE	PVC	GN	70	AWG26	HI-LAP	UL1061
5	INSULATION WIRE	PVC	RD	70	AWG26	HI-LAP	UL1061
4	INSULATION WIRE	PVC	YL	70	AWG26	HI-LAP	UL1061
3	GOLD WIRE	PHOSPHOROUS BRONZE			0.45		GOLD OVER NICKEL
2	HOLDING PLATE	BRASS			t0.23		
1	MODULAR JACK	ABS	WHITE GRAY				UL94V-0
NO.	PART NAME	METERIAL	COLOR	L	SIZE	SPEC	REMARKS

部 番	PART NO.	名	TITLE	鈹 料	MATERIAL	規 格	SPECIFICATION	理	TREATMENT	備 考	REMARK
				三角法 THIRD ANGLE PROJECTION	單 圖 檢 圖	UNIT INCH SCALE	度 N SCALE /S	☐ 獵 ☐ USER		ELECTRONICS	
				電 APPROVAL	檢 圖	CHECK	珞 計 DESIGN			MODULAR JACK ASSY.	
								圖 名 TITLE		623K4-70-M5	
								圖 番 DRAWG. NO.			
MARK	DATE	APPR	CHECK	DESIGN							

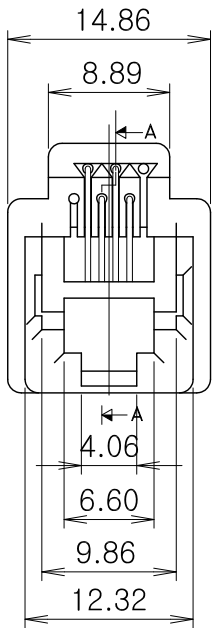