

RoHS COMPLIANT





REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	MAY. 12'03
B		REDRAW	DEC. 12'07
C		MODIFY P/N	JAN. 25'11
D		REDRAW	MAY. 16'12

SPECIFICATIONS


- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000M Ω min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m Ω max

TERMINAL


- Applicable Wires : AWG # 24 - 28
- Material : Brass, Phos. Bronze
- Finish : T= Tin Plated, G= Gold Flash
- Thickness : 0.2 mm
- Q' ty : 10000 pcs./Reel

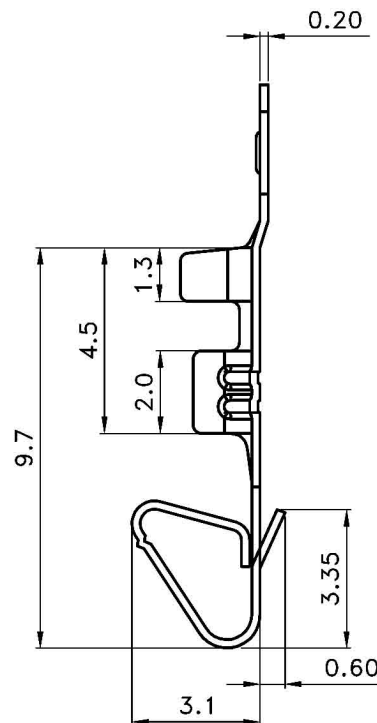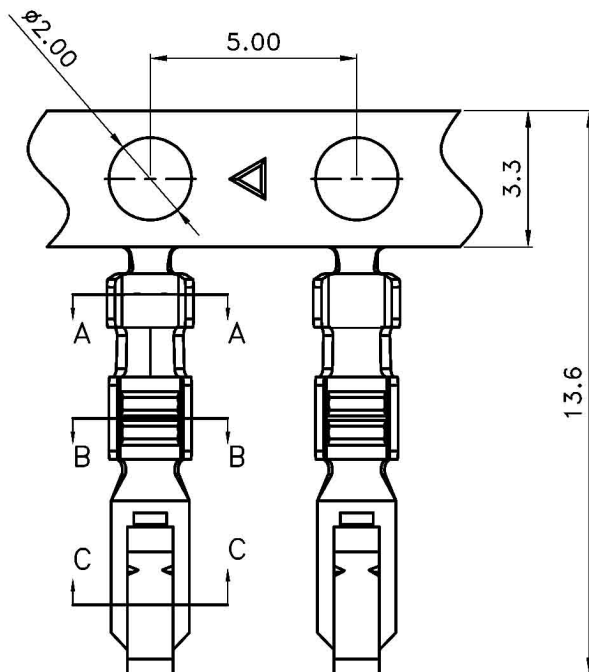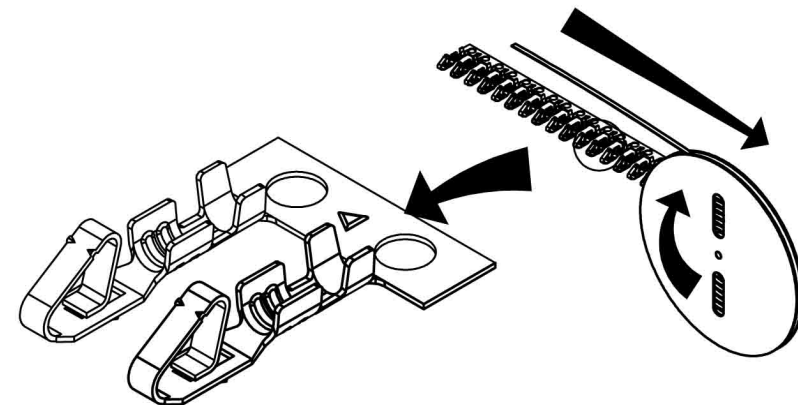

A-A SEC



B-B SEC

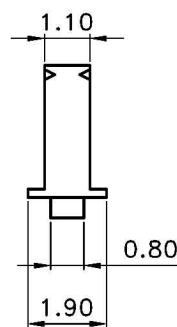

C-C SEC

TOLERANCE UNLESS OTHERWISE SPECIFIED

LINEAR	ANGLE
X. $\pm$	X $^{\circ}$ $\pm$
.X $\pm$ 0.30	.X $^{\circ}$ $\pm$
.XX $\pm$ 0.20	.XX $^{\circ}$ $\pm$
.XXX $\pm$	.XXX $^{\circ}$ $\pm$
APPD	
CHKD	
DRAW	Z
	MAY. 16'2012

PROJECTION

UNITS	MM
SCALE	
SIZE	A4

ETK

GOLD-TEK ELECTRIC CO., LTD.

TITLE
2.54MM TERMINAL

PART NO.
8001T(G)

CAD NO. I056
F:\PDF\HW\HW-0021

SHEET
1 OF 1

圖面編號:GTKSD0004-D(1)