




88-XX-P1B14-P00-NB

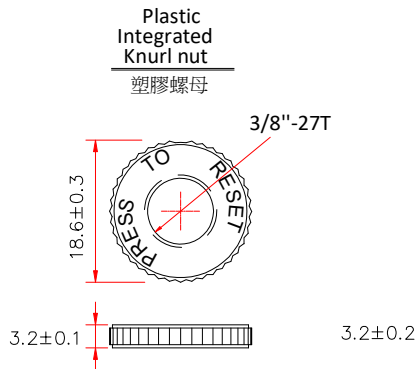


Panel Cutout






NO.	Dimensions
1	29.2±0.3
2	14.4±0.2
3	22.6±0.3
4	6.35±0.1
5	Ø7.5±0.1

OVERLOAD	TRIP TIME
600%	0.34-1.05sec
500%	0.42-1.75sec
400%	0.62-3.05sec
300%	1.50-5.5sec
200%	5.2-30.0sec
150%	Trip in 1Hour
100%	Hold,No Trip

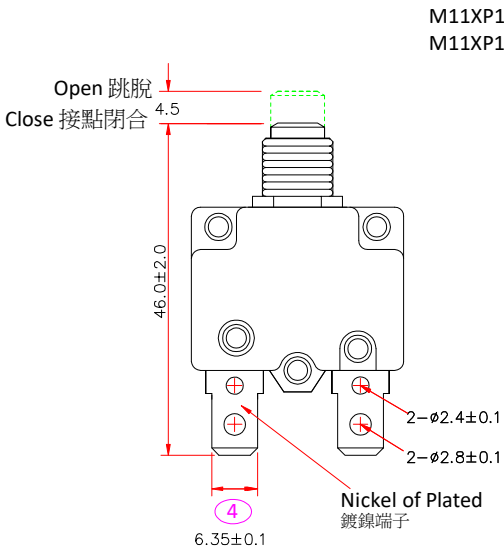


M11XP1.0 Plastic Bushing
M11XP1.0 塑膠(六角)螺栓

Push Button=Black
黑色推桿

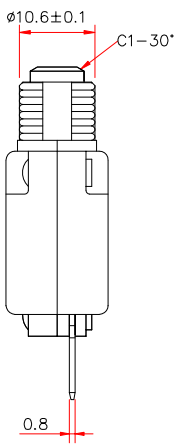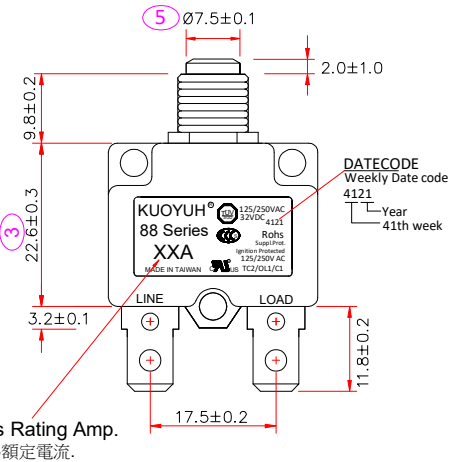

Marking: Follow the rated,XXA is Rating Amp.



備註 Remark:

1.XXA 表示額定電流。 XXA is Rating Amp.

2.安規 Approve mark:

CUL 3A~30A 125/250VAC;50VDC

TUV 3A~30A 125/250VAC; 32VDC

CCC 3A~20A 125/250VAC

CSA 10A ; 15A 125VAC

3. 過錫爐時溫度為235±5°C, 60W烙鐵加熱時,溫度為350±5°C, 加熱時間為3秒內,最多不可超過5秒。 When tin stove processing temperature is 235±5°C,time is 3-5sec; 60W wending iron processing, temp is 350±5°C, within 3 secs, can't over 5 sec.

4. 符合歐盟RoHS指令 2011/65/EU 要求。(接點使用排除條款) The product accord with the requirement of ROHS(EU 2011/65/EU) Contacts use Exempted item of RoHS Directive 2010/571/EU 8(b)

5. ⊗ 表示必檢尺寸,The size of the need to check

6. 已符合UL1500 點火保護 第三版。 The devices have been evaluated for Ignition Protection in accordance with UL 1500, Third Edition.

NO	DESCRIPTION	APPROVED	DATE	TOLERANCE	APPROVED	DESING	DRAWER	Unit(單位)	mm	
5										
4				DIMENSION TOLERANCE				Scale(比例)	1 : 1	
3	TUV 由3A-20A 增加為 3-30A; 125/250VAC; 32VDC	黃獻明	2021.09.30	XX.XX ±0.05	總經理 2019.01.01 黃獻明	品研部 2019.01.01 陳政作	品研部 2019.01.01 黃威誠	Rev(版本)	G/3	
2	UL1500 Ignition Protected Approved	黃獻明	2013.05.20	XX.X ±0.1				Material(材質)		Thermal Circuit Breaker
1	UL+CUL 21~30A TC2/OL0/C1 Approved	黃獻明	2012.10.10	ANGLE TOLERANCE X ±1°				Title(品名)		88 Series Thermal Circuit Breaker
				X.X ±0.5°				Drawing no.(圖號,料號)		88-XX-P1B14-P00-NB