


Cn	L	H	W	T	Parts No.
5 μ F	47	35	20.5	100	A206000395


Note:Black Plastic Case

20#UL1015 BLACK LINE

20#UL1015 BLACK LINE

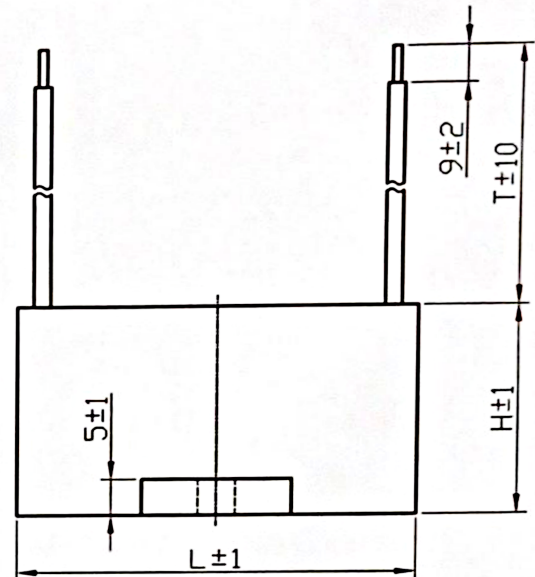

The lead position is allowed within this shadow range

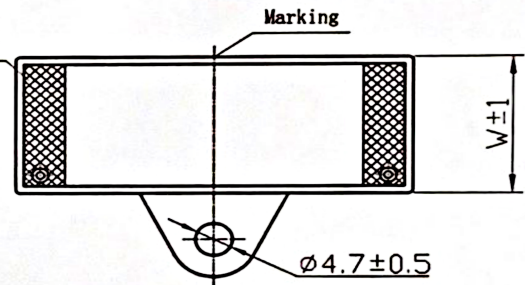

Technology specification:

- 1.Capacitance tolerance:Cn $\pm$ 5%;
- 2.Rate voltage: 450VAC;
- 3.Rate frequency:50/60Hz;
- 4.Dissipation factor: $\leq$ 0.0025 (at 100Hz) ;
- 5.Test voltage between terminals:2UnAC/5s;
- 6.Test voltage between terminals and case:2000VAC/2s;
- 7.Maximum permissible overvoltage:110% of the rated voltage;
- 8.Maximum permissible overcurrent:130% of the rated current;
- 9.Class of operation:B;
- 10.Accord with RoHS;
- 11.Reference standard: 《EN60252-1:2013》 《UL810-2008》 .

MARKING: (Laser Etch)




C61-P2-32 SH C61-P2
 Cn $\pm$ 5% 450VAC
 S3 DB B 50/60Hz
 40/85/21 10000AFC

DATE

Client affirm/Date												
						SHENG YE ELECTRIC CO.,LTD						
Symbol	Amount	Zone	Doc.No.	Signature	Date	Product Drawing						
Design	L.J.LI	2023.01.12	Standard									
Drawing	L.J.LI	2023.01.12				Design Phases	Weight	Scale	Electronic Source			Ver
Auditing	Y.Z.H	2023.1.12										
Technics			Approved			Top Page1		Page1				