
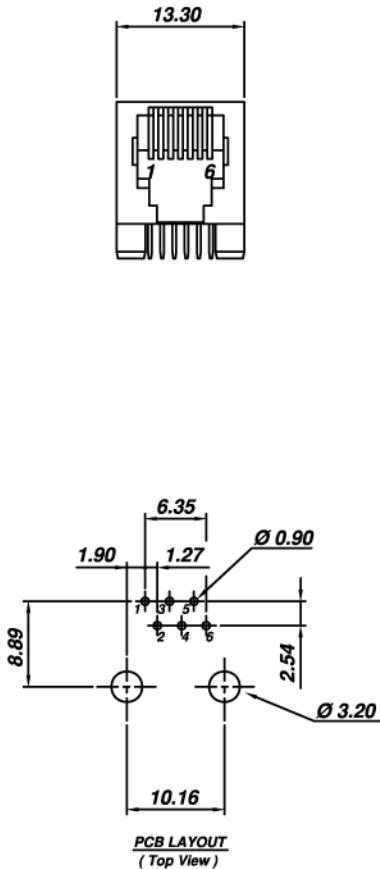


SPECIFICATION :


1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing (Option) :
 - PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
 - Nylon (UL 94V-0), Soldering Temperature:260°C
- Color : Black Color
- Spring Wire:
 - 0.35mm Thickness Phosphor bronze Gold Plating Over Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

AJ-031-6-X-XX-N

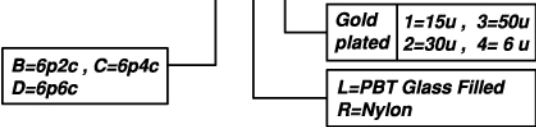


ALLEN CREATIONS CORP.

TITLE
RJ11 or RJ12 Very Low Profile PCB Jack
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
AJ-031-6-X-XX-N

SCALE SIZE DWG. NO. 9631-6 SERIES

DWG. NO. AST031002-1

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
	LINEAR	MM INCH	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	Steven FEB-18 '08
	ANGLE	°30'	RADIL	+0.45 -0.15	Johnn FEB-18 '08
				Billy FEB-18 '08	