

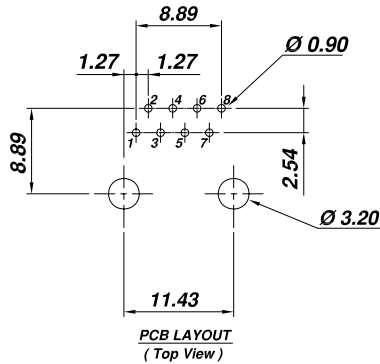



RoHS Compliant



SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.

Contact Resistance : 20milli-Ohm Max.

Rating Current : 1.5A Max.

Rating Voltage : 120V AC.

Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing (Option) :

PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C

Nylon (UL 94V-0), Soldering Temperature:260°C

Color : Black Color


Spring Wire:

0.35mm Thickness Phosphor bronze Gold Plating Over Nickel

Temperature Range : - 40°C / +85°C

Durability : 500 Mating cycles Min.

AJ-031-8-F-XX-N

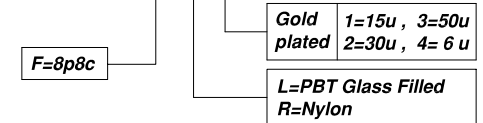

ALLEN CREATIONS CORP.

端訊企業有限公司

TITLE

RJ45 Very Low Profile PCB Jack

UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR

AJ-031-8-F-XX-N

SCALE SIZE DWG. NO. 9631-8 SERIES

DWG. NO.

AST031004-2

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
 THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	$.00\pm0.01$ $.000\pm0.005$ $.0000\pm0.002$	$.00\pm0.25$ $.000\pm0.13$ $.0000\pm0.05$	Steven CK'D Johnn APP'D Billy	JUL-01 '08 JUL-01 '08 JUL-01 '08
$\frac{MM}{INCH}$	ANGLE +0°30'	RADIL	+0.45 -0.15		