

Asia Macro (S) Pte Ltd

Tel: (65) 6749 1101

Fax: (65) 6749 2234

DOCUMENT NO.

RDE0118A

SERIAL NO.




AM2541V2-2AxNP

Material: *Insulator: PBT UL 94V-0

*Contact: Brass, Gold flash plating

Dimensional & Ordering Information:

Circuits	Part No	Dimensions		PCS/BAG
		A	B	
4	AM2541V2-2Ax2P	2.54	5.08	1000
6	AM2541V2-2Ax3P	5.08	7.62	1000
8	AM2541V2-2Ax4P	7.62	10.16	1000
10	AM2541V2-2Ax5P	10.16	12.70	1000
12	AM2541V2-2Ax6P	12.70	15.24	500
14	AM2541V2-2Ax7P	15.24	17.78	500
16	AM2541V2-2Ax8P	17.78	20.32	500
18	AM2541V2-2Ax9P	20.32	22.86	500
20	AM2541V2-2Ax10 P	22.86	25.40	500
22	AM2541V2-2Ax11 P	25.40	27.94	400
24	AM2541V2-2Ax12 P	27.94	30.48	400
26	AM2541V2-2Ax13 P	30.48	33.02	400
28	AM2541V2-2Ax14 P	33.02	35.56	300
30	AM2541V2-2Ax15 P	35.56	38.10	300
32	AM2541V2-2Ax16 P	38.10	40.64	300
34	AM2541V2-2Ax17 P	40.64	43.18	300
36	AM2541V2-2Ax18 P	43.18	45.72	300
38	AM2541V2-2Ax19 P	45.72	48.26	300
40	AM2541V2-2Ax 20P	48.26	50.80	300
42	AM2541V2-2Ax 21 P	50.80	53.34	200
44	AM2541V2-2Ax22 P	53.34	55.88	200
46	AM2541V2-2Ax 23P	55.88	58.42	200
48	AM2541V2-2Ax 24P	58.42	60.96	200
50	AM2541V2-2Ax 25P	60.96	63.50	200
52	AM2541V2-2Ax 26P	63.50	66.04	200
54	AM2541V2-2Ax 27P	66.04	68.58	200
56	AM2541V2-2Ax 28P	68.58	71.12	200
58	AM2541V2-2Ax 29P	71.12	73.66	200
60	AM2541V2-2Ax 30P	73.66	76.20	200
62	AM2541V2-2Ax 31P	76.20	78.74	100
64	AM2541V2-2Ax 32P	78.74	81.28	100
66	AM2541V2-2Ax 33P	81.28	83.82	100
68	AM2541V2-2Ax 34P	83.82	86.36	100
70	AM2541V2-2Ax 35P	86.36	88.90	100
72	AM2541V2-2Ax 36P	88.90	91.44	100
74	AM2541V2-2Ax 37P	91.44	93.98	100
76	AM2541V2-2Ax 38P	93.98	96.52	100
78	AM2541V2-2Ax 39P	96.52	99.06	100
80	AM2541V2-2Ax 40P	99.06	101.60	100

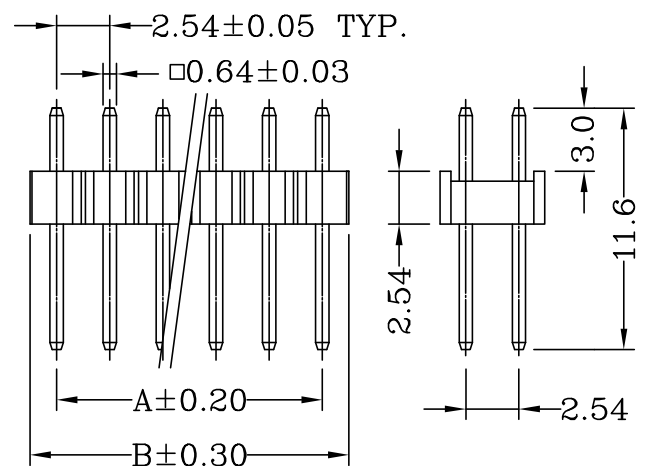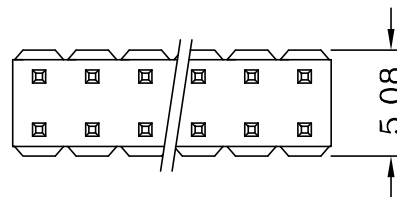

REV.	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
	NEW DRAWING	mm	*** ±0.08				
			** ±0.15				
			* ±0.25				