


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	NOV.09'04
B		ADD. RoHS	DEC. 27'05

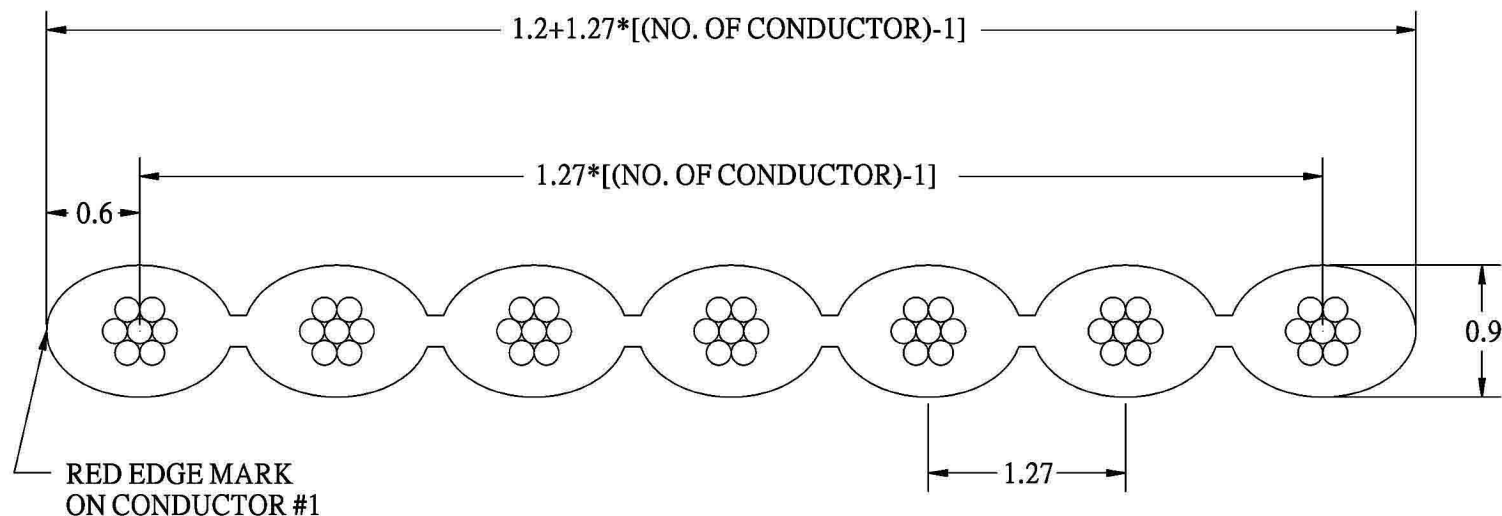

UL Style : 2651

Operating Temperature : -20°C to +105°C

Flammability Rating : UL-VW-1

Voltage Rating : 300V

Physical

Insulation Material : Polyvinyl Chloride (PVC)

Conductor : #28AWG (7*0.127) Stranded Tinned Copper

#26AWG (7*0.16) Stranded Tinned Copper

Color : Grey With Red Edge

Electrical

Impedance : 115Ω (Unbalanced)

Capacitance : 12.2 pF/ft.

Inductance : .14μH/ft

Propagation Delay : 1.4 ns/ft.

Insulation Resistance : 1GΩ/M min.

Note:
/RH= **RoHS Compliant**

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION 	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE	UNITS	TITLE	PART NO.
X. ±	X° ±	MM	1.27mm FLAT CABLE	AWG28**C (/RH)
.X ± 0.20	.X° ±			CAD NO. I163
.XX ± 0.10	.XX° ±			SHEET
.XXX±	.XXX° ±	SCALE	CPART NO.	1 OF 1
APPD		SIZE		
CHKD		A4		
DRAW	Z	DEC. 27'2005		

圖面編號:GTKSD1332-B(1)