



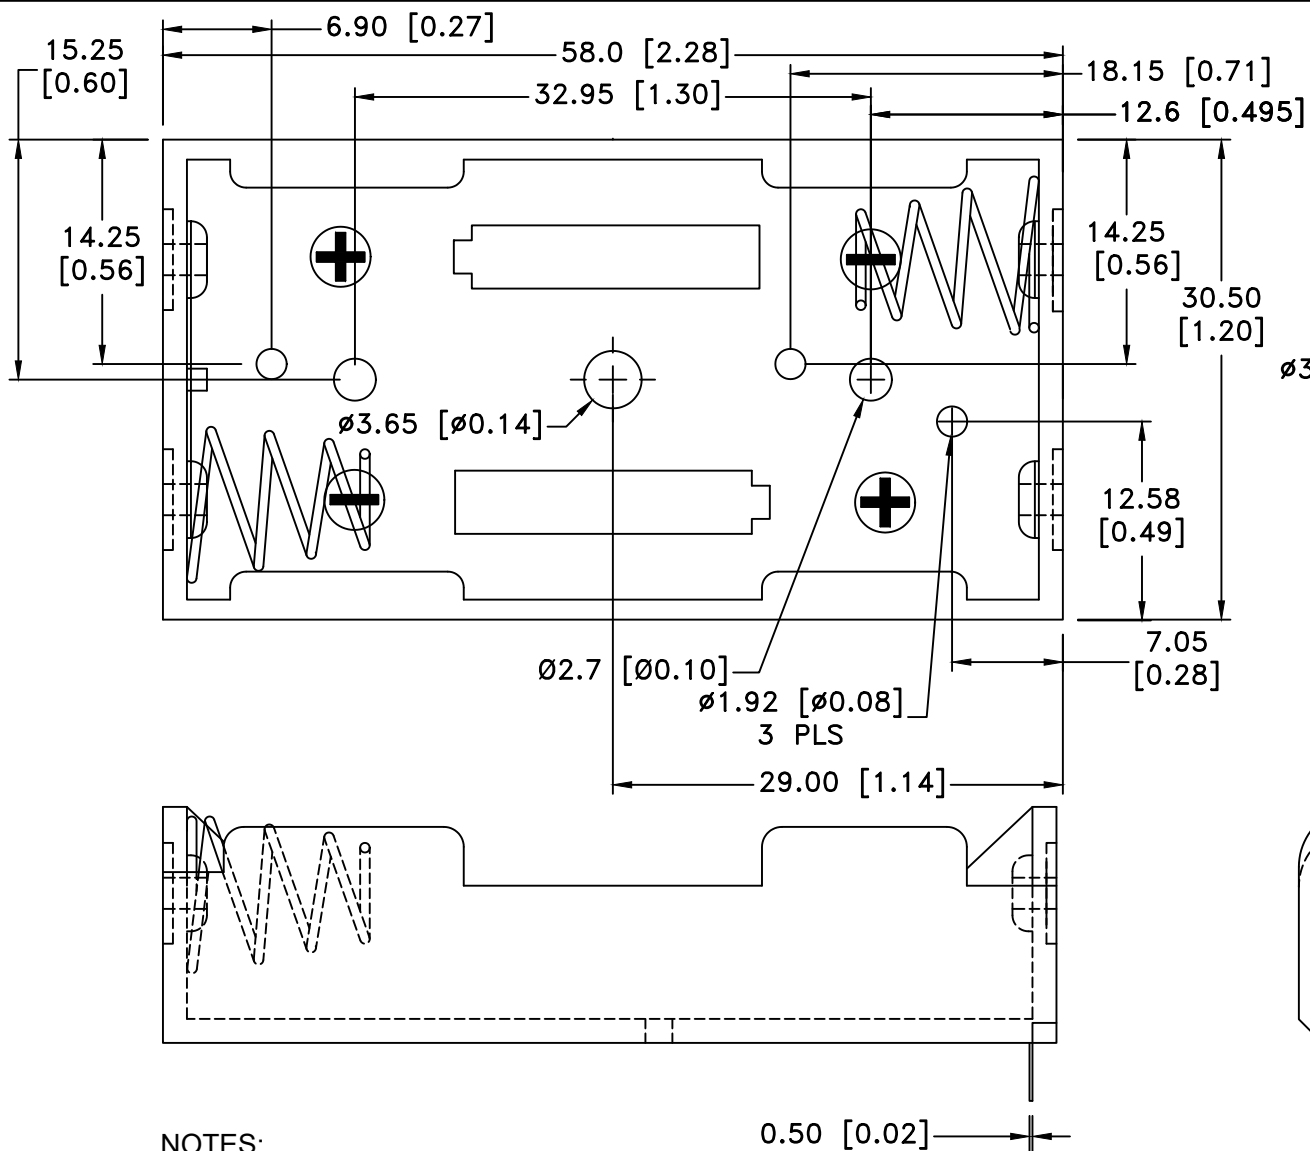

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/22/17	K	ADDED CHAMFER	T.B.	B.S.	
02/13/19	L	REMOVED RIB ADDED CHAMFER	T.B.	B.S.	
03/06/19	M	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

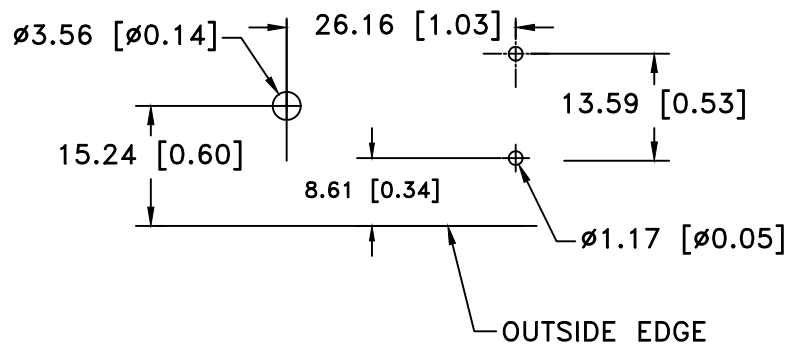

NOTES:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE

FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959

TEMPERATURE RANGE: -10°C to +100°C

RIVETS: BRASS, NICKEL PLATED.

SPRING: SPRING STEEL, NICKEL PLATED.

PC PINS: SPRING STEEL, NICKEL PLATED

CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000

ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735			
decimal ±.5 (.020)			Scale	Drawn By B.S.
				Approved By T.B.
Fractional ± .8 (.030)	Title TWO "AA" CELL HOLDER			
Angular ± 3°	Date 03/06/19	Drawing Number BC2AAPC		