



REV.	ECN NO.	REVISED	DATE

NOTE:
1.MATERIAL:
a.HOUSING:PA66 UL94V-0
b.CONTACT:BRASS
(SURFACE PLATING: Ni100u"-120u")
SEE ORDERING INFORMATION

2.ELECTRIC:
a.CONTACT RESISTANCE: 100 MILLIOHMS MAX
b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25° C~ +85° C

ORDERING INFORMATION





BS-04-A***004

电池座系列
BS-04系列
DIP 90° TYPE

PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部
2023-10-10
LQ. HUANG

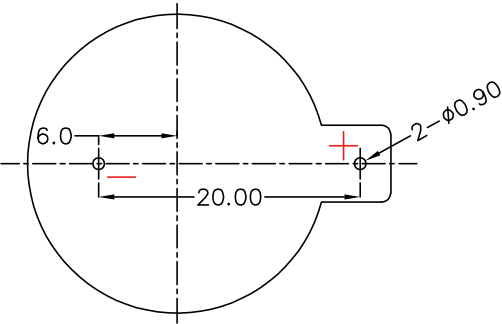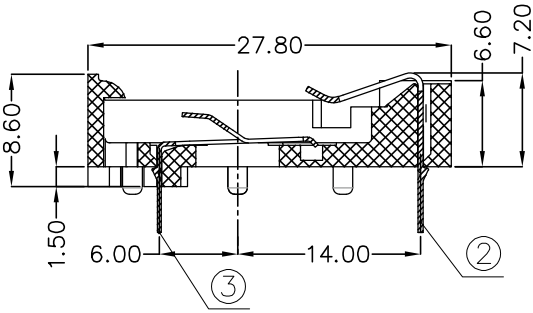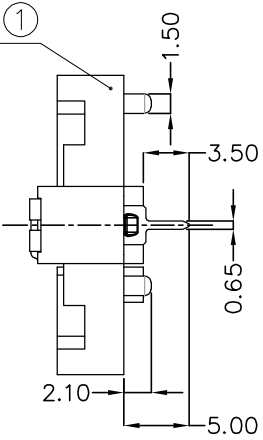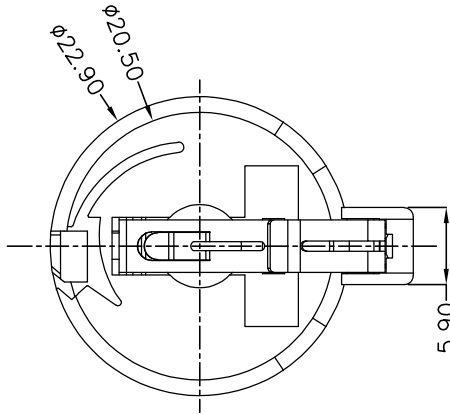

PCB Layout Diagram
Top View

3	TERMINAL(-)	1	BRASS T=0.3MM	Ni-Plating
2	TERMINAL(+)	1	BRASS T=0.4MM	Ni-Plating
1	HOUSING	1	PA66 UL94V-0	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		SHENZHEN LIDEA BATTERY CO., LTD					
DECIMALS:	ANGLES:	DSND	YangFeng	DATE	2023-10-10	TITLE:	
X :±0.30	X :±1°	CHKD	ZhouRuicai	DATE	2023-10-10	BS-2032-4-1 Ni DIP	
X.X :±0.25	X.X :±0.5°	APVD	XueShunyong	DATE	2023-10-10	PART NO.:	
X.XX :±0.20		SCALE:	SIZE: A4	VIEW:	⊙ ⊞	BS-04-A1BJ004	
X.XXX :±0.10		SHEET 1 OF 1	UNIT: mm	REV.:	A/0	OBJECT: MY	DRAW NO.:MY-CP-0142