
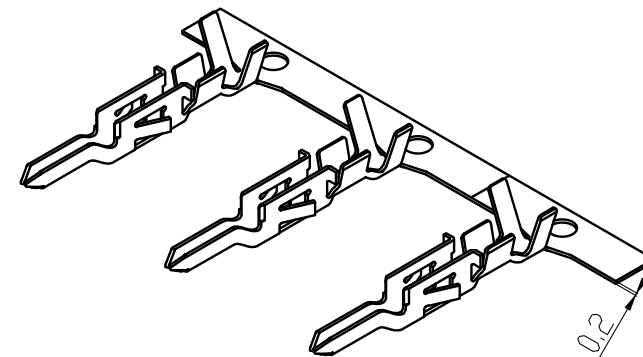
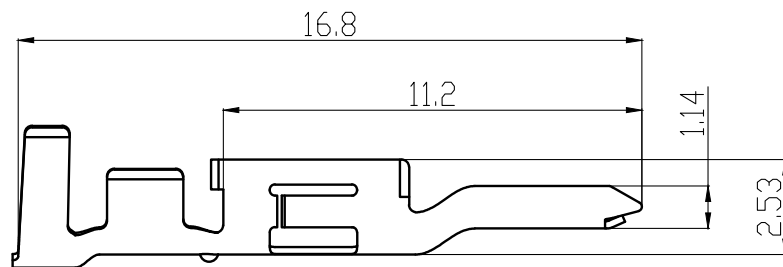





5559-AT型端子承认图面

REV	SYM	REVISION RECORD	DR.	APPR.	DATE
A/0		原始版本			A/0
A/1		料号由C4202TA改为C4201-T			2017. 10. 22
A/2	①	AT高脚改为AT11			2019. 07. 30

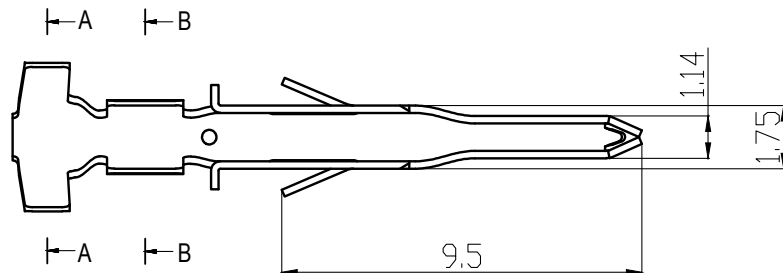

主要技术参数

Main Specifications

线数 (poles): 2 to 6 / 2 to 24P
额定电流 (Current rating): 9.0A AC, DC
额定电压 (Voltage rating): 300V AC, DC
温度范围 (Temperature range): -25°C to +85°C
接触电阻 (Contact resistance): $\leq 15\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
耐电压 (Withstand voltage): 1500V AC/minute
适用基板厚度 Applicable PC board thickness: 1.6 to 2.0mm

Part No.	A	B	C	D	Material	Finish	Wire Range	Qty/reel
C4202-TP2 5559-AT11	3.8	3.75	1.9	2.3	Phosphor Bronze	TIN	AWG #20~#16	5000pcs
C4202-T12P2 5559-AT12	2.7	2.6	2.1	2.2	Phosphor Bronze	TIN	AWG #28~#22	10000pcs

未注公差

 $X.^{\circ} \pm 3^{\circ}$ $X.X.^{\circ} \pm 0.5^{\circ}$ **LHE** 浙江联和电子有限公司
ZHEJIANG LIANHE ELECTRONICS CO., LTD

单位	比例	Design Units	SIZE	页码	
>0-3	>3-18	>18-50	>50-120		
± 0.12	± 0.15	± 0.3	± 0.5	MM Only	METRIC
制作	审核	批准	材料	图号	Part No
			见图解	品名	5559-AT