
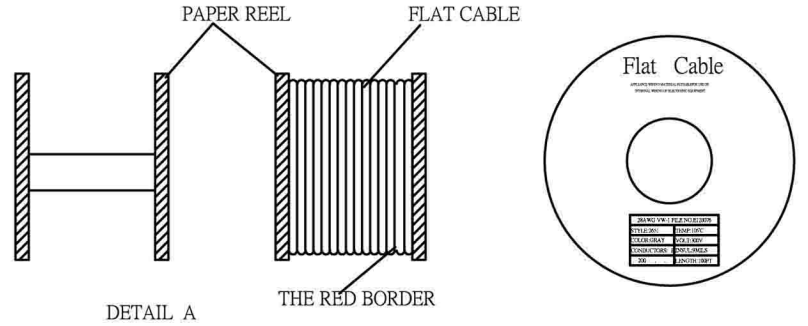
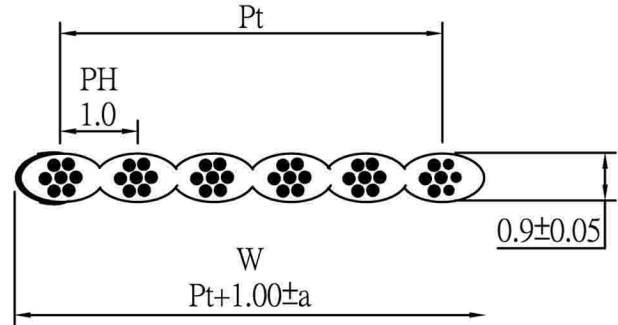


RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	SEP. 22'09
B		MODIFY P/N	MAR. 02'11

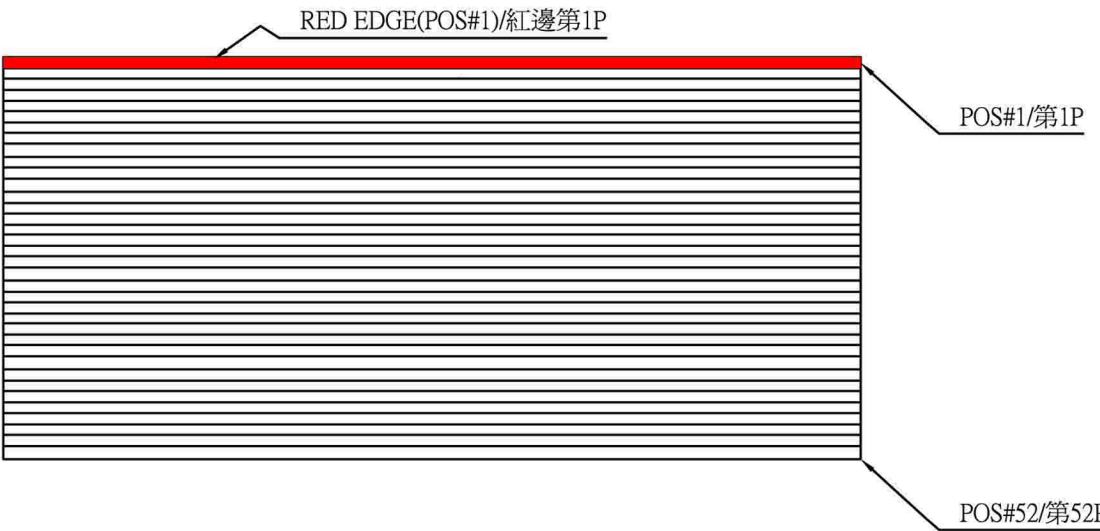

Material: PVC  
Color: Gray

Number of Cores	Size of conductor		Thickness (mm±0.05)	Width(mm)	Allowable Error(mm)
	AWG	Composition(Stranded)±0.005mm			
10P	28	7/0.127	0.9	10.0	±0.30
20P	28	7/0.127	0.9	20.0	±0.30
22P	28	7/0.127	0.9	22.0	±0.30
26P	28	7/0.127	0.9	26.0	±0.30
30P	28	7/0.127	0.9	30.0	±0.30
44P	28	7/0.127	0.9	44.0	±0.30
52P	28	7/0.127	0.9	52.0	±0.30

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION 		GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE			TITLE	PART NO.
X. ±	X° ±	UNITS MM	Pitch:1.00mm Flat Cable UL2651 28AWG	CAWG28**H1000	
.X ±	.X° ±			CAD NO. I393	SHEET
.XX ±	.XX° ±	SCALE	CPART NO.	F:\PDF\FC-A\FC-A254	
.XXX ±	.XXX° ±			1 OF 1	
APPD		SIZE A4	圖面編號:GTKSD2725-B(1)		
CHKD					
DRAW	Z	MAR. 02'2011			