


MALE

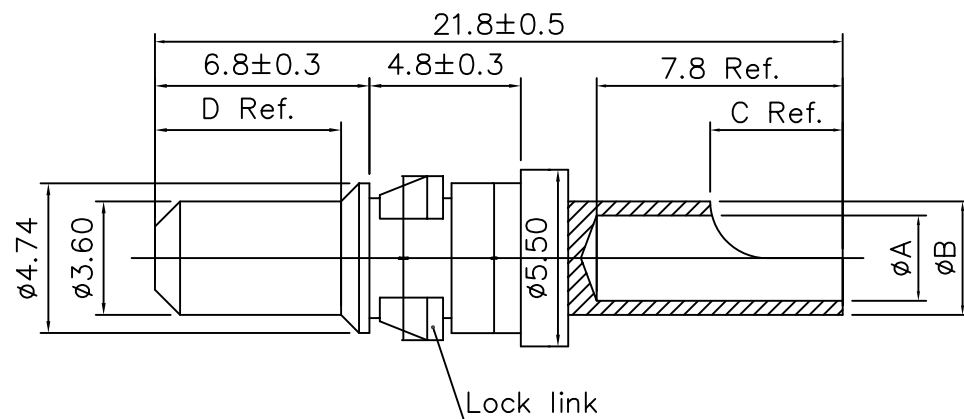

MATERIAL :

CONTACT : BRASS WITH GOLD PLATED

*=CONTACT PLATING

2: GOLD FLASH PLATED OVER NICKEL


3: 15u\"/>

4: 30u\"/>

5: 50u\"/>

LOCK LINK : BRASS WITH NICKEL PLATED

FEMALE

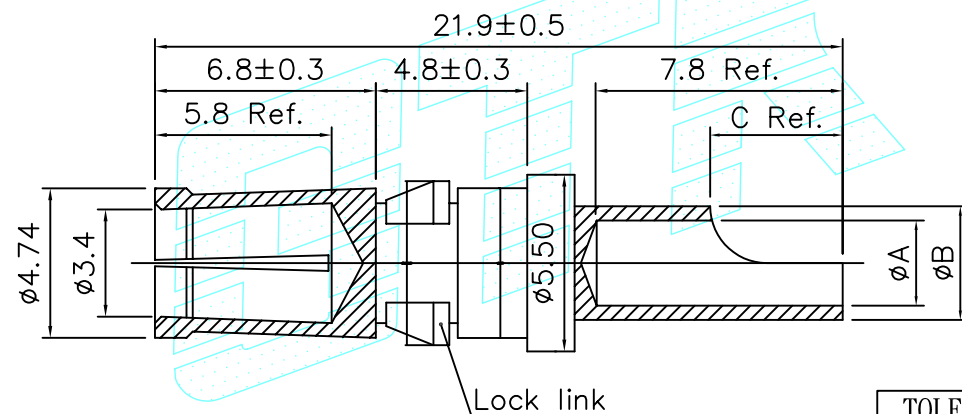

Part No.	Type	CURRENT RATING (Amps)	WIRE SIZE	Dimension			
				øA	øB	C	D
CHPTPS*40	Male	40	AWG #8	4.6	5.5	5.5	6.0
CHPTSS*40	Female						
CHPTPS*20	Male	20	AWG #12	2.7	3.6	5.0	6.6
CHPTSS*20	Female						
CHPTPS*10	Male	10	AWG #16	1.7	2.5	4.5	6.6
CHPTSS*10	Female						

TOLERANCE UNLESS OTHERWISE SPECIFIED

LINEAR		ANGLE	
X.	± 0.30	X°	±
.X	± 0.20	.X°	±
.XX	± 0.10	.XX°	±
.XXX±		.XXX°±	
APPD			
CHKD			
DRAW	Z.	DEC. 20' 2010	

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
D-SUB COAXIAL PIN
SOLDER POWER TYPE

CPART NO.

PART NO.

CHPT*S***

CAD NO. I268

F:\Drw\HW-A\HW-A0074

SHEET

1 OF 1

圖面編號:GTKSD1527-B(1)