

ENGINEERING DEPT.	PRODUCT SPECIFICATION For CP35 Series Power Connector	SPEC.NO.: SPCP008J
		PAGE: 1 / 6

1. SCOPE:

This specification contains the test requirement of subject connectors when tested under the condition and procedure with terminals crimped on the specified maximum size wire

2. APPLICABLE STANDARDS:

MIL - STD - 202	Methods for test of connectors for electronic equipment
MIL - STD - 1344	Test methods for electrical connectors
J-STD-020	Resistance to soldering Temperature for through hole Mounted Devices
SS-00254	Test methods for electronic components ,LEAD-FREE soldering Part design standards

3. APPLICABLE SERIES NO.: CP35 Series

4. SHAPE, CONSTRUCTION AND DIMENSIONS

See attached drawings


5. MATERIALS

See attached drawings

6. ACCOMMODATED P.C.BOARD

6.1 Thickness: 1.6 mm (.063")

6.2 P.C. Board Layout: See attached drawings



REVIEWED : Alex APPROVED : David VERIFIED : Sandy .

ENGINEERING DEPT.	PRODUCT SPECIFICATION For CP35 Series Power Connector	SPEC.NO.: SPCP008J
		PAGE: 2/6

7. ELECTRICAL PERFORMANCE:

	ITEM	TEST CONDITION	REQUIREMENT
7.1	Rated voltage (max.) Rated Current (max.) and Applicable Wire		250V AC (r.m.s.)
		AWG#20 wire gage	5A
		AWG#22 wire gage	5A
		AWG#24 wire gage	4A
		AWG#26 wire gage	2A
		AWG#28 wire gage	1A
		AWG#30 wire gage	1A
7.2	Contact resistance	Dry circuit of DC 20mV max. , 100mA max., Wire resistance shall be removed from the measured value.	Less than 10 mΩ
7.3	Dielectric strength	When applied AC 1500 V 1 minute between adjacent terminal	No Breakdown
7.4	Insulation resistance	When applied DC 500 V between adjacent terminal or ground	More than 1000 MΩ
7.5	Contact resistance on Crimped portion	Crimp the wire to the terminal, measure by dry circuit, 20mV max., 100mA max., Wire resistance shall be removed from the measured value.	Less than 5 mΩ

8. MECHANICAL PERFORMANCE:

	ITEM	TEST CONDITION	REQUIREMENT
8.1	Wire size	Specified wire size	Accepts AWG#20-#24
8.2	Terminal crimp strength	When crimped AWG#20 size wire	More than 7.0 Kgf
		When crimped AWG#22 size wire	More than 5.0 Kgf
		When crimped AWG#24 size wire	More than 3.0 Kgf
		When crimped AWG#26 size wire	More than 2.0 Kgf
		When crimped AWG#28 size wire	More than 1.2 Kgf
		When crimped AWG#30 size wire	More than 0.8 Kgf
8.3	Terminal insertion force	Insertion speed 25± 3 mm per minute into housing	Less than 1.5 Kgf
8.4	Terminal retaining force in insulator	Retention speed 25± 3 mm per minute from Wire to Wire Housing	More than 3.0 Kgf
8.5	Single contact insertion force	Measure force to insertion using mating square pin at speed 25± 3 mm per minute	700 gram max.

ENGINEERING DEPT.	PRODUCT SPECIFICATION For CP35 Series Power Connector	SPEC.NO.: SPCP008J
		PAGE: 3/6

	ITEM	TEST CONDITION	REQUIREMENT
8.6	Single contact withdrawal force	Measure force to withdrawal using mating square pin at speed 25 ± 3 mm per minute	150 gram min.
8.7	Pin retention force in Board mount Header	Push Pin for insulator base at speed 25 ± 3 mm per minute	More than 1.5 Kgf
8.8	Durability	Connector shall be subjected to 30 cycles of insertion and withdrawal	Contact resistance: Less than twice of initial
8.9	Locking force	While with drawing plug & receptacle without terminal at speed 25 ± 3 mm per minute	More than 5.5 Kgf

8.10 Insertion Force and Withdrawal Force :

8.10.1 Test method:

Housing with crimped contacts and a header shall be mated and unmated on the same axis. Initial insertion and withdrawal forces and withdrawal force at 30th shall be measured for single circuit and multi-circuits. For the measurement of single circuit, the housing lock shall be removed.

8.10.2 Requirements:

Unit: Kgf

NO. OF CIRCUITS	INSERTION FORCE Max.)	WITHDRAWAL FORCE (Min.)
2	2.0	0.5
4	3.0	1.0
6	6.0	1.5
8	7.0	2.0
10	9.0	2.5
12	10.0	3.0
14	11.0	3.5
16	12.0	4.0
18	13.0	4.5
20	14.0	5.0
22	15.0	5.5
24	16.0	6.0

ENGINEERING DEPT.	PRODUCT SPECIFICATION For CP35 Series Power Connector	SPEC.NO.: SPCP008J
		PAGE: 4/6

9. ENVIRONMENTAL PERFORMANCE:

	ITEM	TEST CONDITION	REQUIREMENT
9.1	Temperature rise	Then carried the rated current	30 °C max.
9.2	Vibration	1.5 mm 10-55-10 HZ/minute each 2 hours for X, Y and Z directions	Appearance: No damage Discontinuity: 1 micro second max.
9.3	Heat aging	105± 2 °C, 96 hours	No damage
9.4	Humidity	60± 2 °C, 90-95% RH, 96 hours measurement must be taken within 30 min. after tested	Appearance: No damage Contact resistance: Less than twice of initial Dielectric strength: To pass para 7-3
9.5	Temperature cycling	One cycle consists of : (1) -55 ⁺⁰ / ₋₃ °C , 30 min. (2) Room temp. 10-15 min. (3) 105 ⁺³ / ₋₀ °C , 30 min. (4) Room temp. 10-15 min.	Appearance: No damage Contact resistance: Less than twice of initial
9.6	Salt spray	Temperature: 35± 3 °C Solution: 5± 1% Spray time: 48± 4 hours Measurement must be taken after water rinse	Appearance: No damage Contact resistance: Less than twice of initial
9.7	Solder ability	Tin-Lead Process: Soldering time: 5 ± 0.5 second Soldering pot: 230 ± 5 °C Lead-Free Process: Soldering time: 3 ± 0.5 second Soldering pot: 245 ± 5 °C	Minimum: 90% of immersed area


ENGINEERING DEPT.	PRODUCT SPECIFICATION For CP35 Series Power Connector	SPEC.NO.: SPCP008J
		PAGE: 5/6

	ITEM	TEST CONDITION	REQUIREMENT
9.8	Resistance to soldering heat	<p>DIP Type Tin-Lead Process: Soldering time: 5 ± 0.5 second Soldering pot: $240 \pm 5^{\circ}\text{C}$</p> <p>DIP Type Lead-Free Process Soldering time: 5 ± 0.5 second Soldering pot: $260 \pm 5^{\circ}\text{C}$</p> <p>SMT Type Tin-Lead Process: Refer Reflow temperature profile(11.1) Soldering time: 10 second Max. Soldering pot: $230 \pm 5^{\circ}\text{C}$</p> <p>SMT Type Lead-Free Process: Soldering time: 20 second Max. Soldering pot: $250\sim 260^{\circ}\text{C}$ Refer Reflow temperature profile(11.2)</p>	No damage

10. AMBIENT TEMPERATURE RANGE: -40 to $+105^{\circ}\text{C}$


11. Recommended IR Reflow Temperature Profile:

11.1 Using Typical Solder Paste

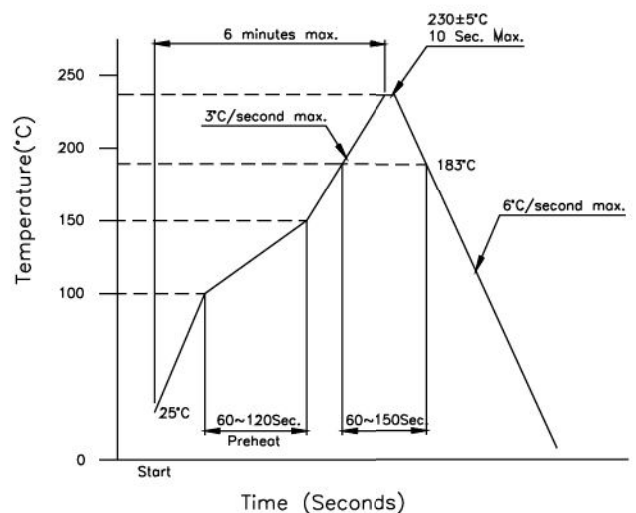

ENGINEERING DEPT.	PRODUCT SPECIFICATION For CP35 Series Power Connector	SPEC.NO.: SPCP008J
		PAGE: 6/6

11.2 Using Lead-Free Solder Paste

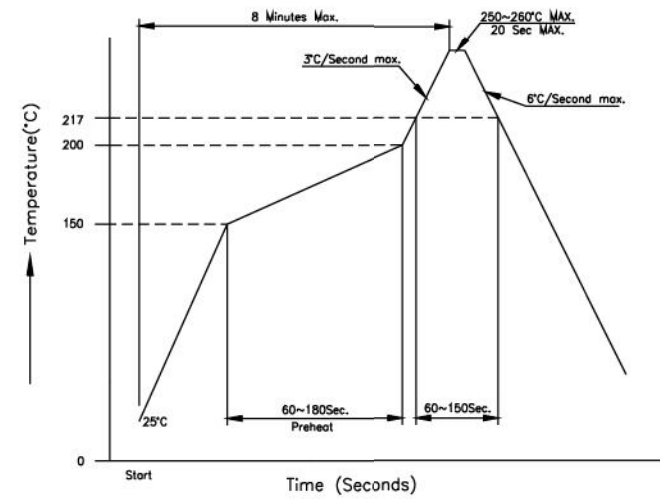



Material:

* Insulation: Nylon 6T + 30% GF. UL 94V-0

Color Black

* Contact: Brass

Ordering Code:

CP35 ** P * H 0 0

① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Circuits: 02~24

③ Contact type: P= Plug

④ Contact plated:

1= Tin over Nickel

2= Gold flash plated over 50μ" Nickel



3= 15μ" Gold plated over 50μ" Nickel

4= 30μ" Gold plated over 50μ" Nickel

⑤ H= Right angle

⑥ Mount type: 0= Dip Type

⑦ Other options: 0= With plastic board lock (Standard)

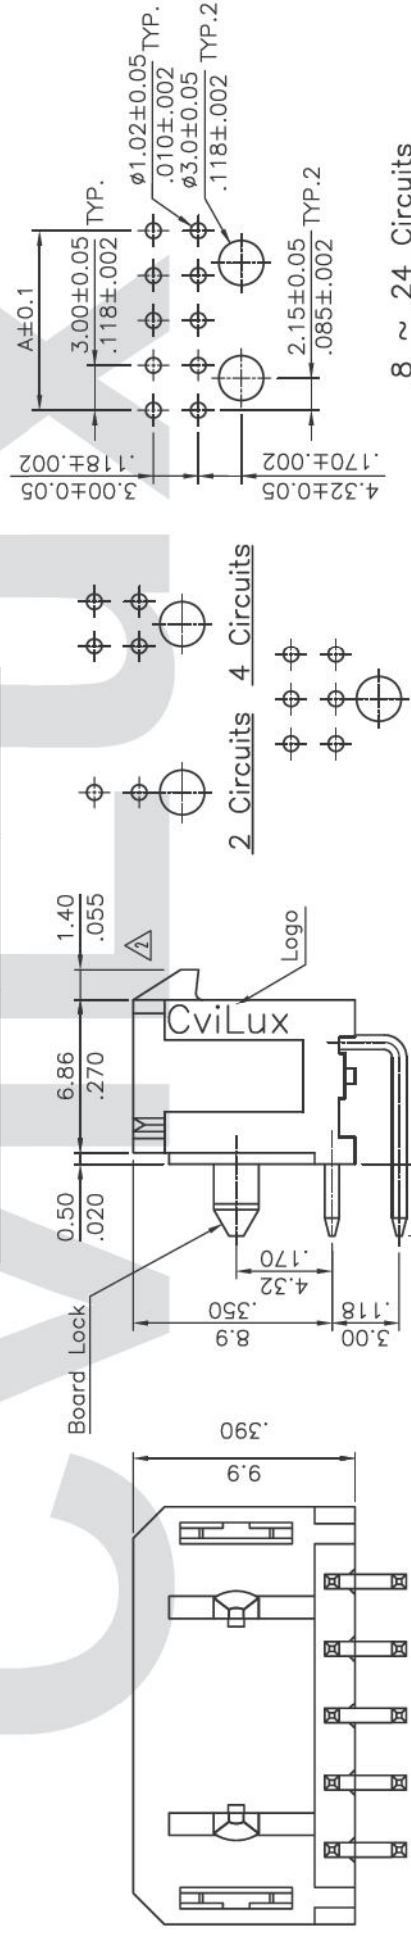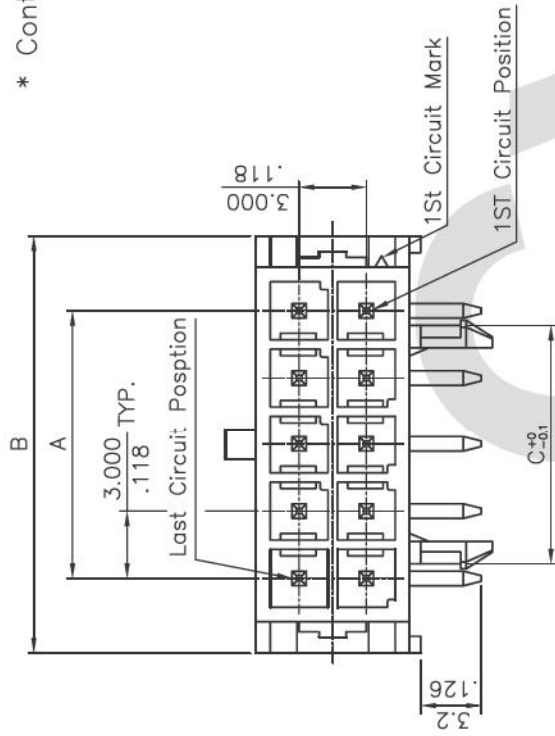

8 ~ 24 Circuits

6 Circuits

Recommended P.C. Board layout

RoHS Compliant

SYM	△5	Sun	9/18-06	ECR06083-0/ECN06330	<div>REVISIONS</div>	APPROVED BY: Alex	DATE	UNIT: mm / inch	TITLE: 3.00mm PITCH RIGHT ANGLE HEADER POWER CONNECTOR			DRAWING NO. CP3506SJ	PART NO. CP35**P*H00	SCALE 3 / 1	SHEET 1 OF 1
	△4	Sun	12/12-05	ECN05428					DRAWN BY: Sun	TOLERANCE UNLESS OTHERWISE SPECIFIED					
	△3	Casey	9/22-05	ECR05080-0/ECN05322					ENGINEER: Easley						
	△2	Casey	8/12-05	ECR05064/ECN05274					CHECKED BY: David						
											MATERIAL:				
									X ± 0.30/.012 X* ± .1*			XXX ± 0.10/.004 XX* ± .1*			
									XX ± 0.20/.008 X* ± .1*						



瀚菱股份有限公司
CviLux Corporation