
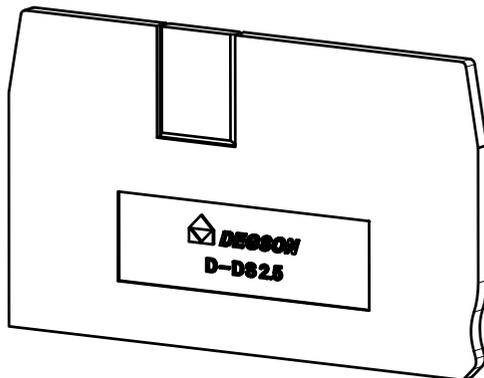
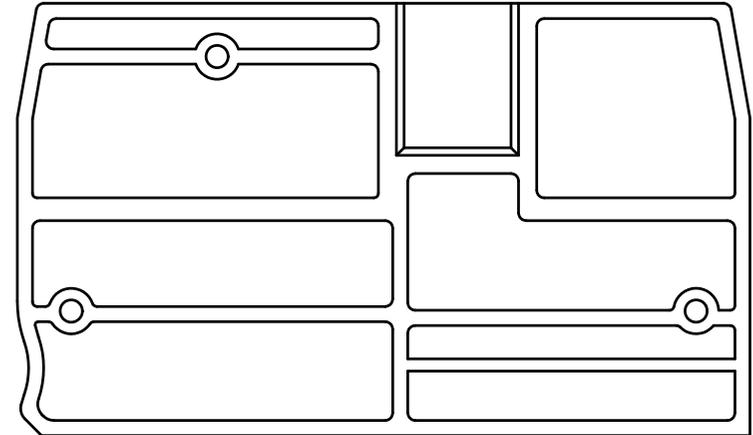
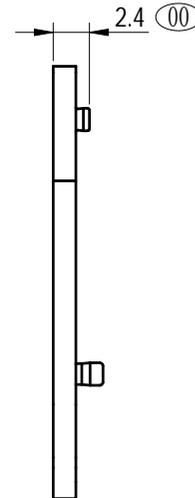
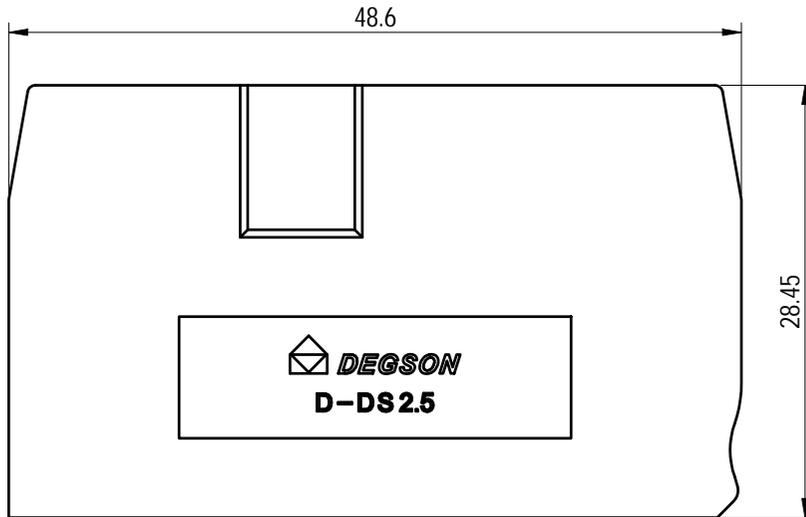


未注公差/General tolerances (mm)											0.1/10 ±2'		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315		>315 ~ 400	>400 ~ 500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

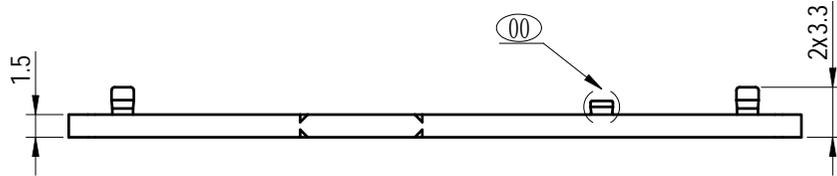

使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes
阻燃等级/flame class	UL94V-0

DEGSON		MATERIAL: A63RVO-1102	SURFACE/COLOR:		
APPD: 李根芳 2022.08.12		MAT NO./REV: 11060000147-1 / 00		MAT STATUS: 批量	
CHKD: 马恩开 2022.08.12		NAME			
DRFT: 郑启国 2022.08.12		D-DS2.5-01P-11-00A&Z(H)			
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET	
200083575	CUSTOMER DRAWING	已发布	2:1	1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
00		Updated drawings	郑启国	2022.08.12

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除非得到明确授权，否则禁止转让、复制、引用、发布本文档的内容。未经授权擅自使用或传播本文档内容，侵权者将承担相关法律责任。 所有权利保留，未经许可，不得擅自复制或传播。