

未注公差/General tolerances(mm)


0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

A



2.20

B

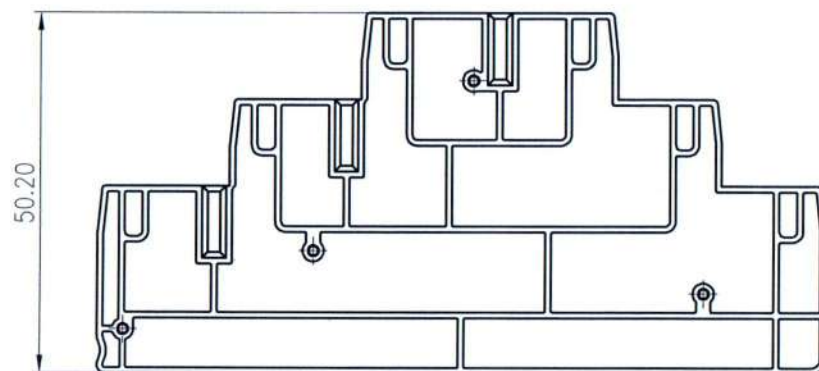

50.20




A

仅供参考图

签字: 李彬帝

日期: 2020.4.17

C

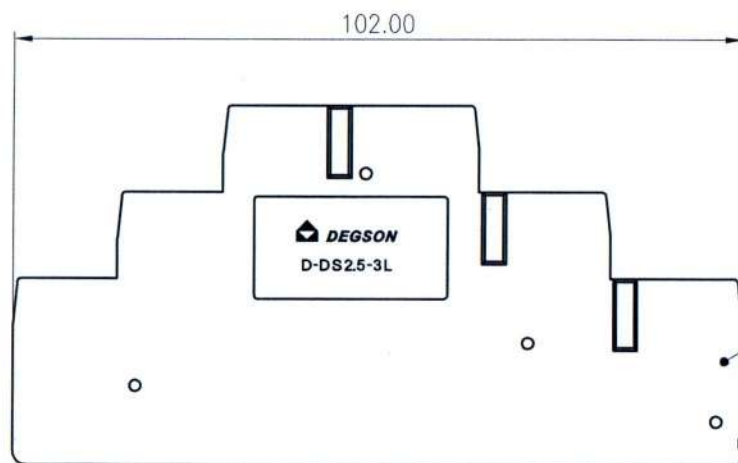

102.00

DEGSON
D-DS2.5-3L

1

VIEW A

D

1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		/	/
间距/Pitch(mm)/线数范围/Poles		2.2/N=01P	
剥线长度/Stripping length(mm)		/	/
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number:		/	/
PANTONE / RAL		/	/

MATERIAL: /

SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRFT: MaEK 2020.01.09

SIZE: A4

mm
(inch)宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME:

D-DS2.5-3L-01P-1Y-00A(H)

DRAWING NO.: 11000115

TYPE: CUSTOMER DRAWING

REV DO-1

SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE