


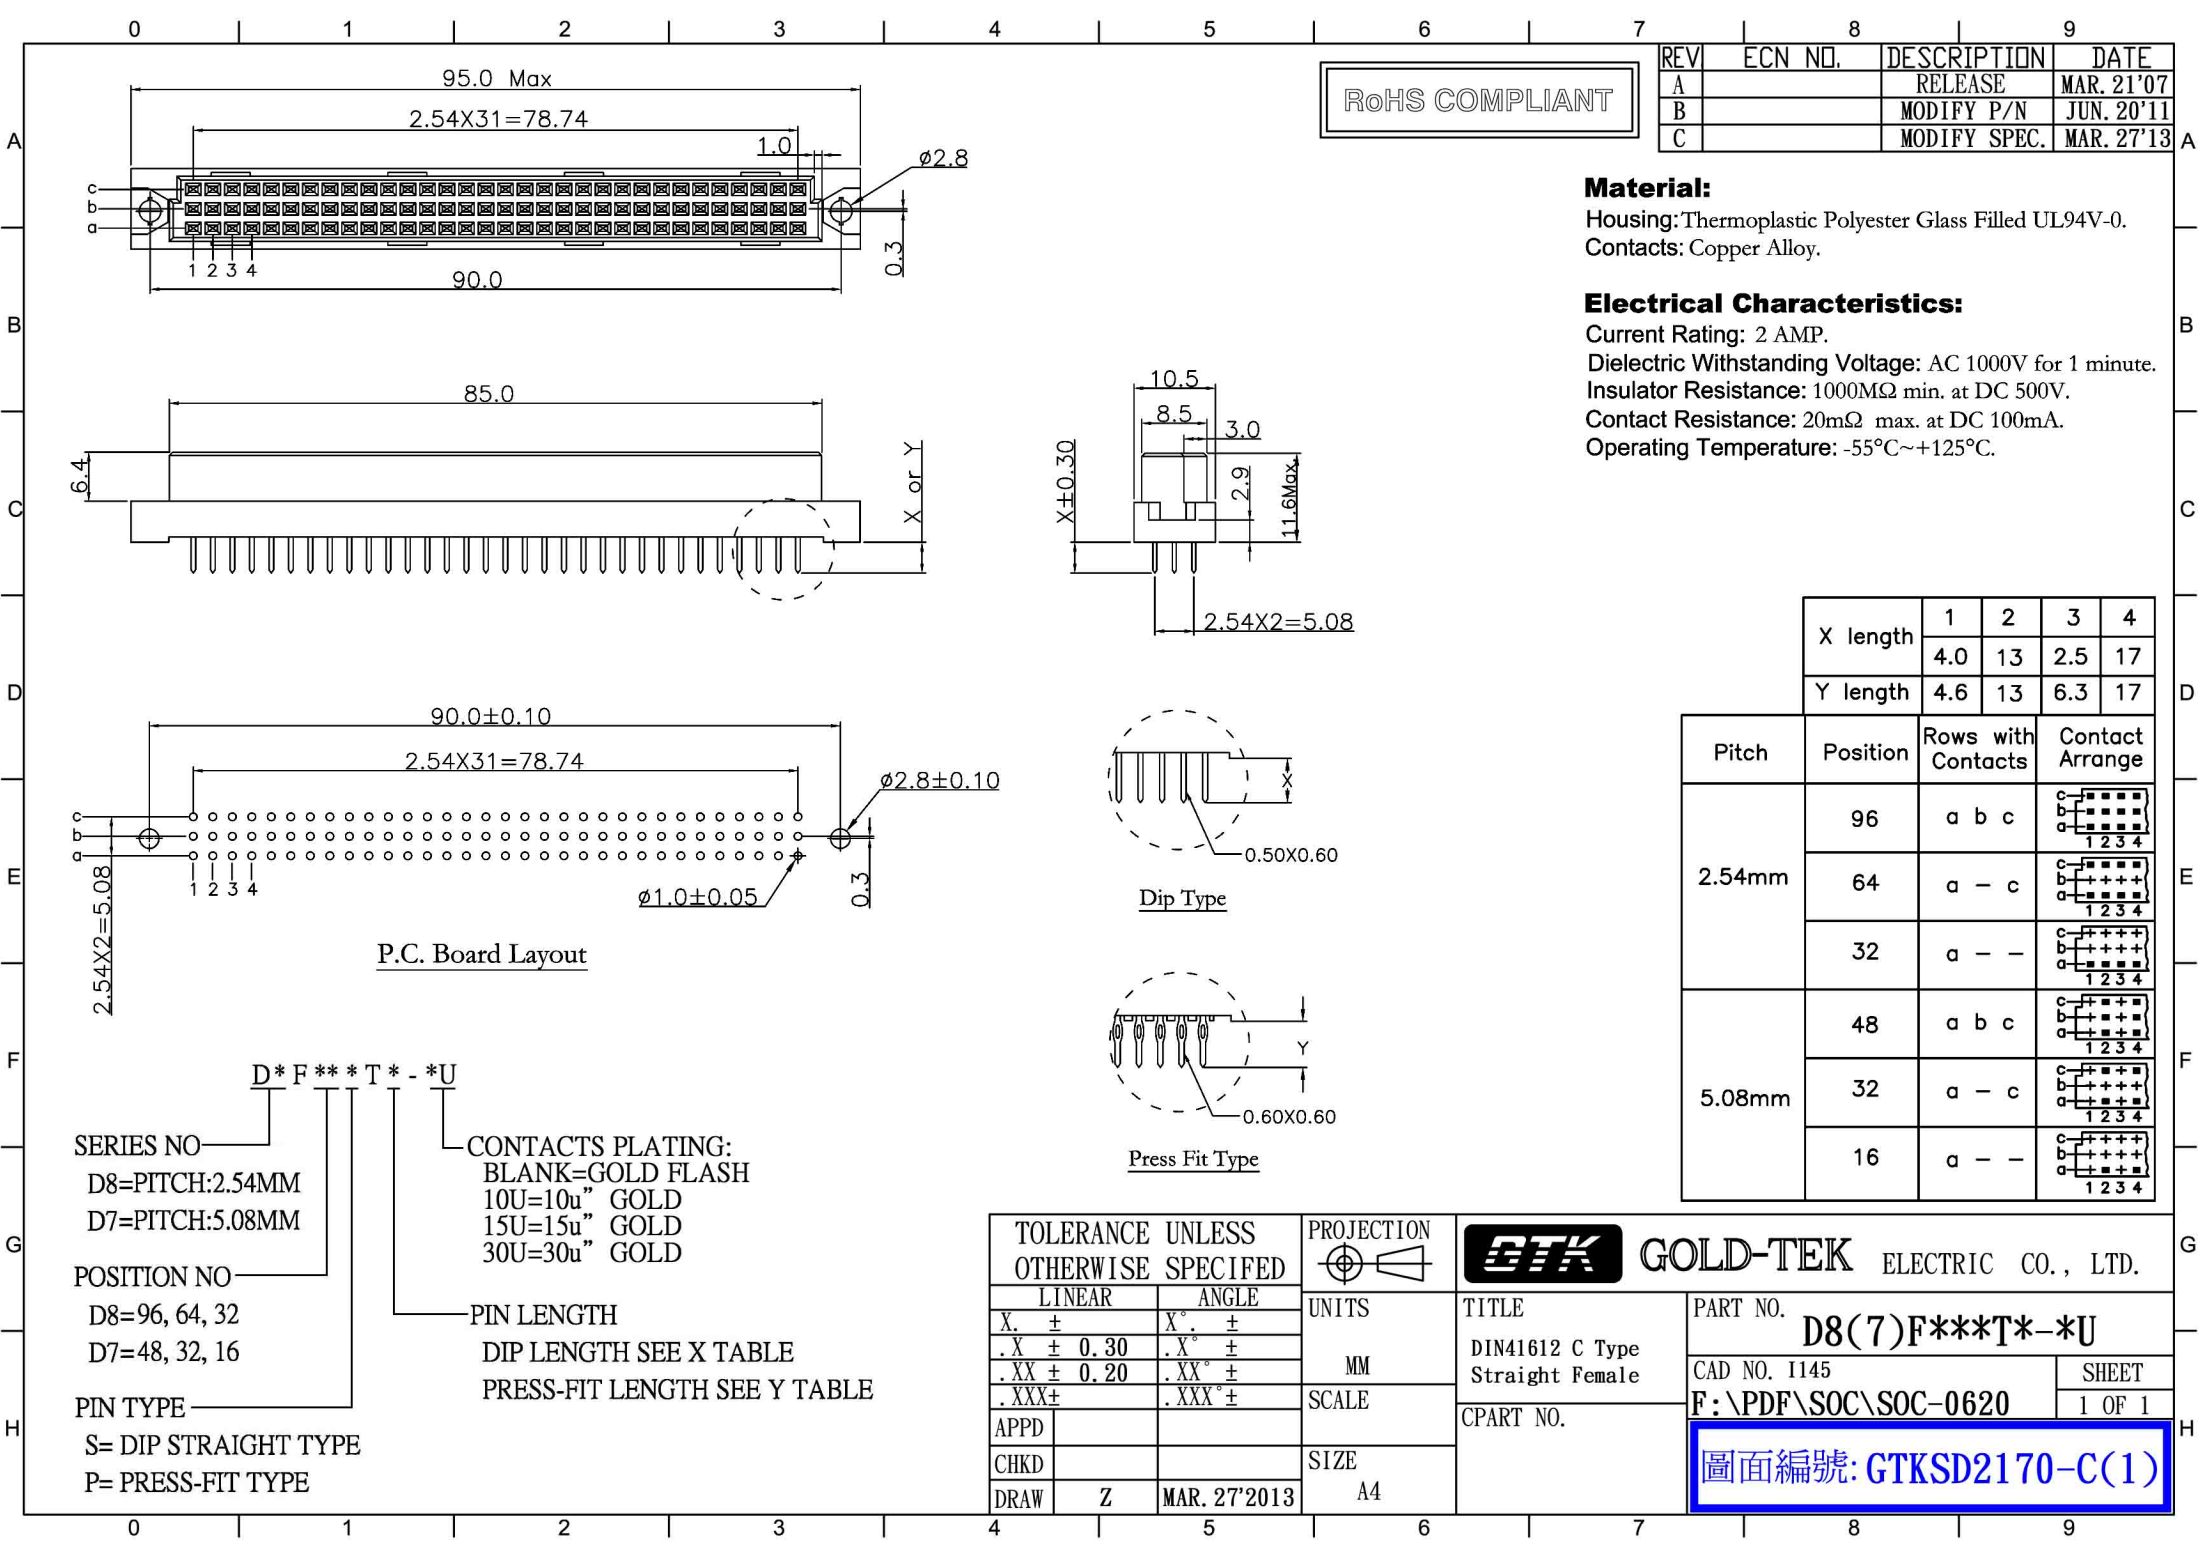

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	MAR. 21'07
B		MODIFY P/N	JUN. 20'11
C		MODIFY SPEC.	MAR. 27'13


Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V for 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+125°C.

	X length	1	2	3	4
		4.0	13	2.5	17
	Y length	4.6	13	6.3	17
Pitch	Position	Rows with Contacts	Contact Arrange		
2.54mm	96	a b c			
	64	a - c			
	32	a - -			
5.08mm	48	a b c			
	32	a - c			
	16	a - -			

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION 	 GOLD-TEK ELECTRIC CO., LTD.		
LINEAR		ANGLE	UNITS	TITLE DIN41612 C Type Straight Female	PART NO. D8(7)F***T*-*U	
X. ±	X°. ±	CAD NO. I145			SHEET	
.X ± 0.30	.X° ±					
.XX ± 0.20	.XX° ±					
.XXX±	.XXX° ±					
SCALE	SIZE A4	CPART NO.	F:\PDF\SOC\SOC-0620		1 OF 1	
APPD						
CHKD						
DRAW			Z	MAR. 27'2013	圖面編號: GTKSD2170-C(1)	