


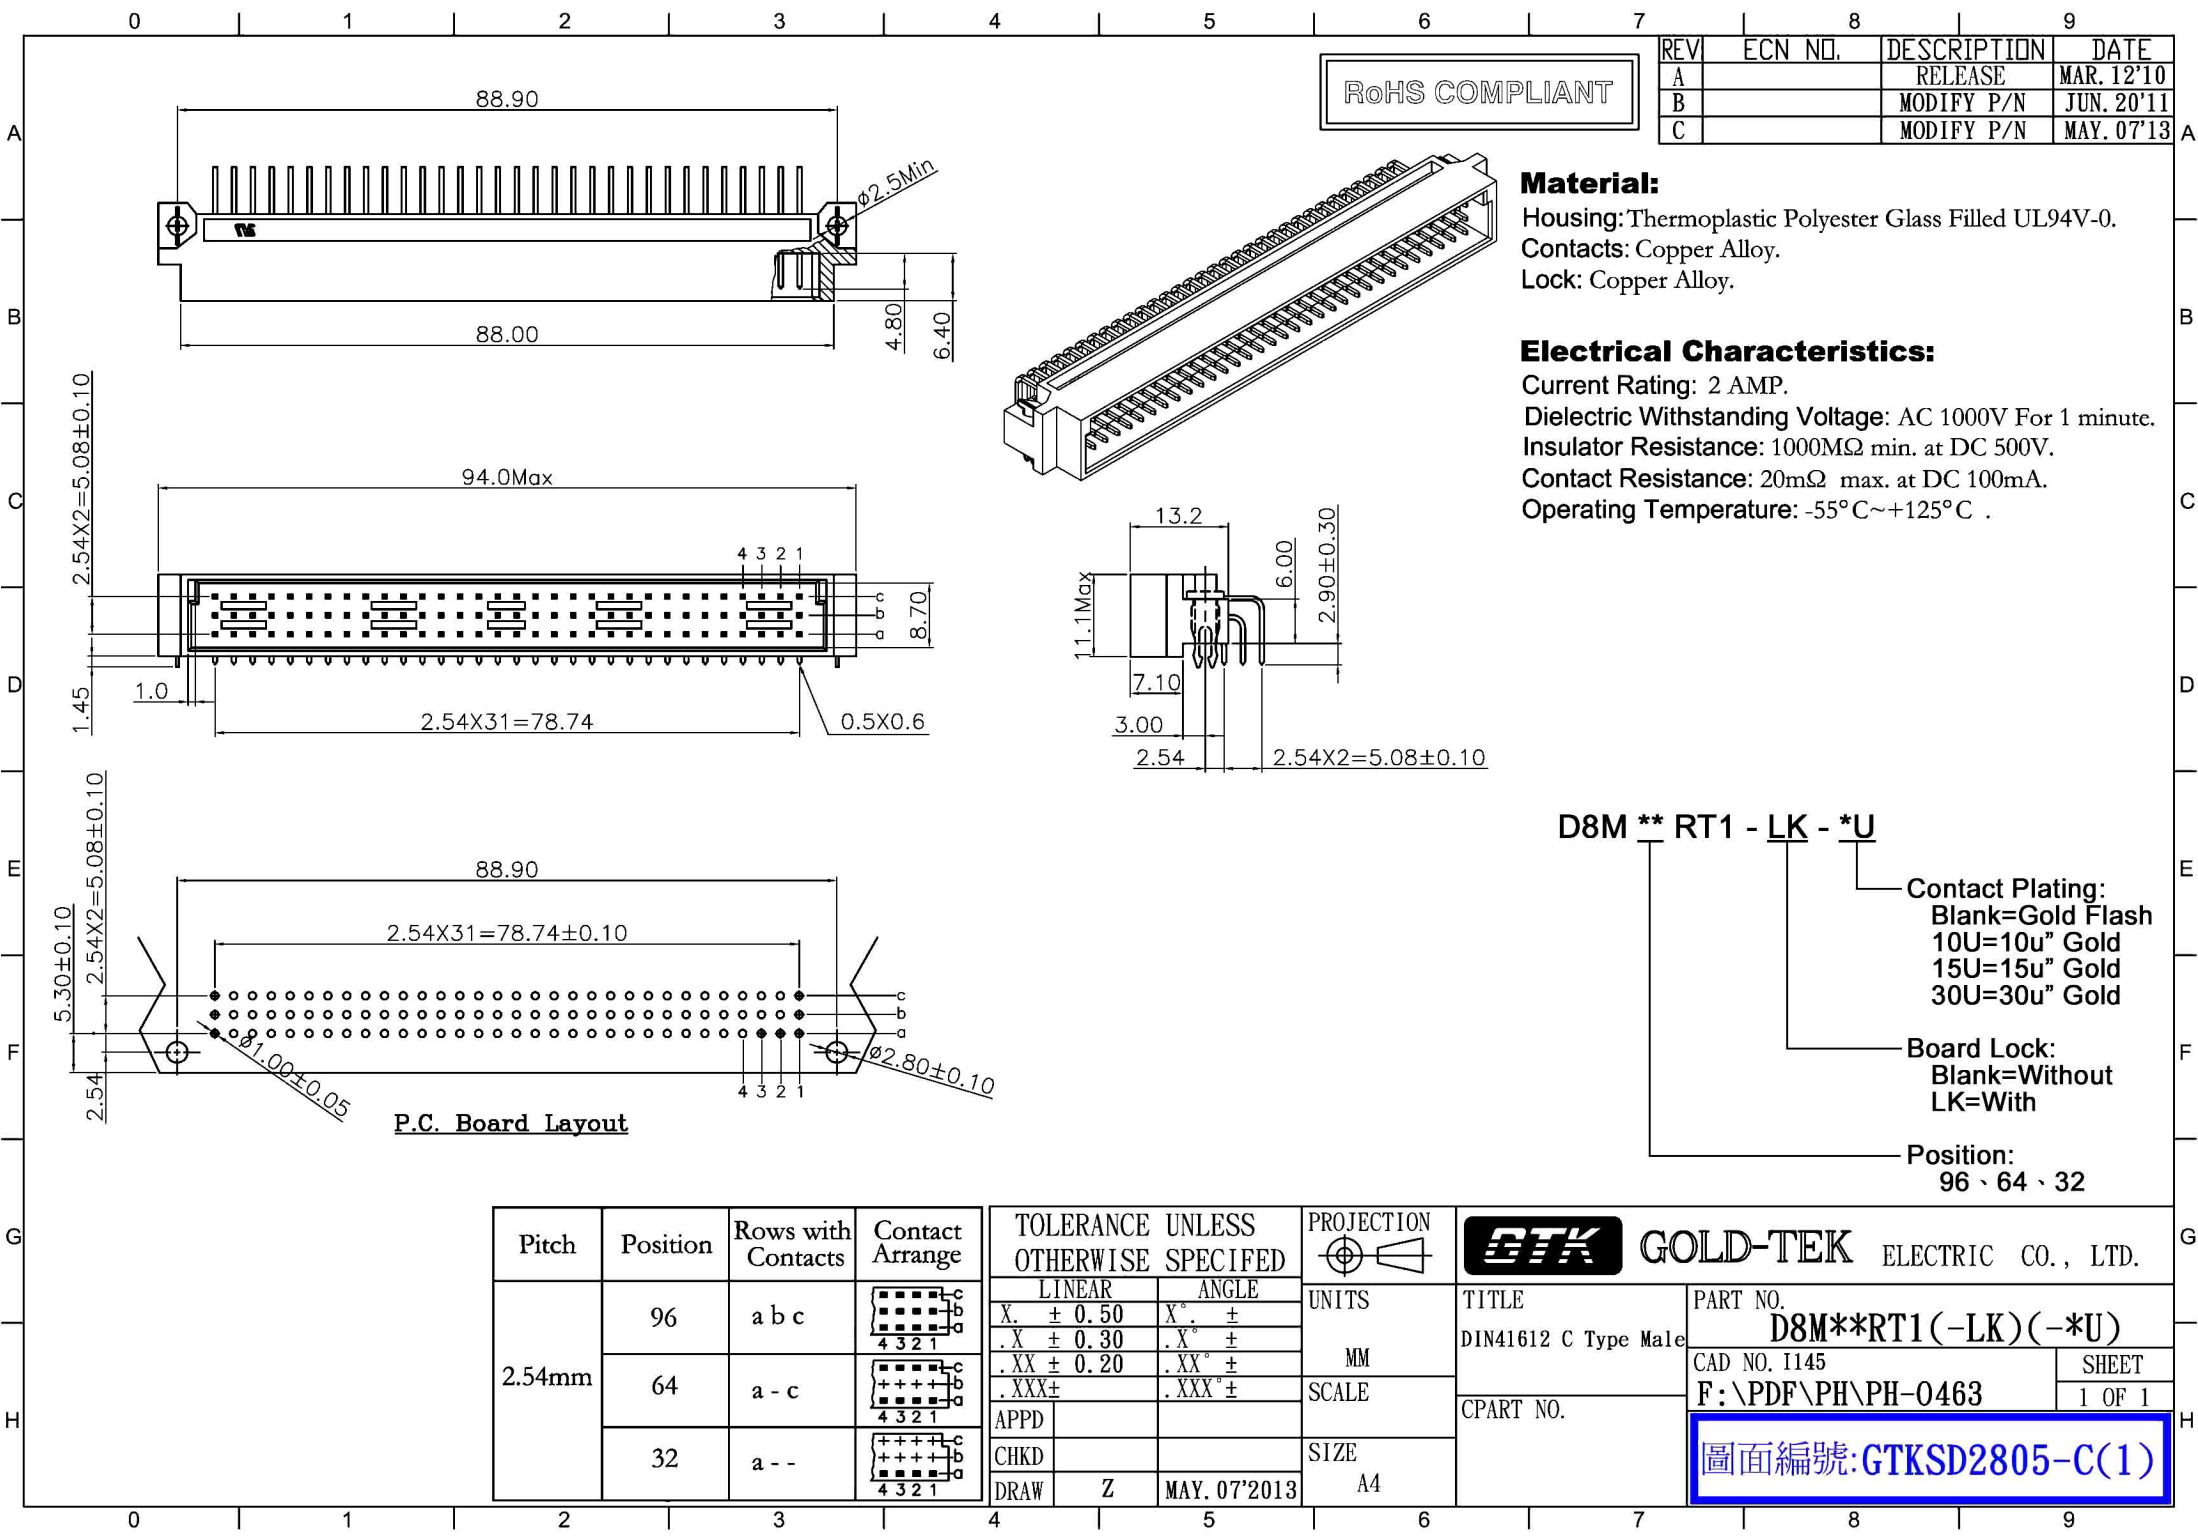

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	MAR. 12'10
B		MODIFY P/N	JUN. 20'11
C		MODIFY P/N	MAY. 07'13

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.
Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+125°C .

D8M ** RT1 - LK - *U

Contact Plating:
Blank=Gold Flash
10U=10u" Gold
15U=15u" Gold
30U=30u" Gold

Board Lock:
Blank=Without
LK=With

Position:
96、64、32

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	96	a b c	
	64	a - c	
	32	a - -	

TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINEAR	ANGLE
X. ± 0.50	X° ±
.X ± 0.30	.X° ±
.XX ± 0.20	.XX° ±
.XXX±	.XXX° ±
APPD	
CHKD	
DRAW	Z
	MAY. 07'2013

PROJECTION
UNITS
MM
SCALE
SIZE
A4

		ELECTRIC CO., LTD.	
TITLE DIN41612 C Type Male		PART NO. D8M**RT1(-LK)(-*U)	
CPART NO.		CAD NO. I145	SHEET 1 OF 1
		F:\PDF\PH\PH-0463	
		圖面編號:GTKSD2805-C(1)	