


RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUL. 05' 05
B		MODIFY P/N	MAR. 11' 08
C		MODIFY P/N	JUN. 08' 11

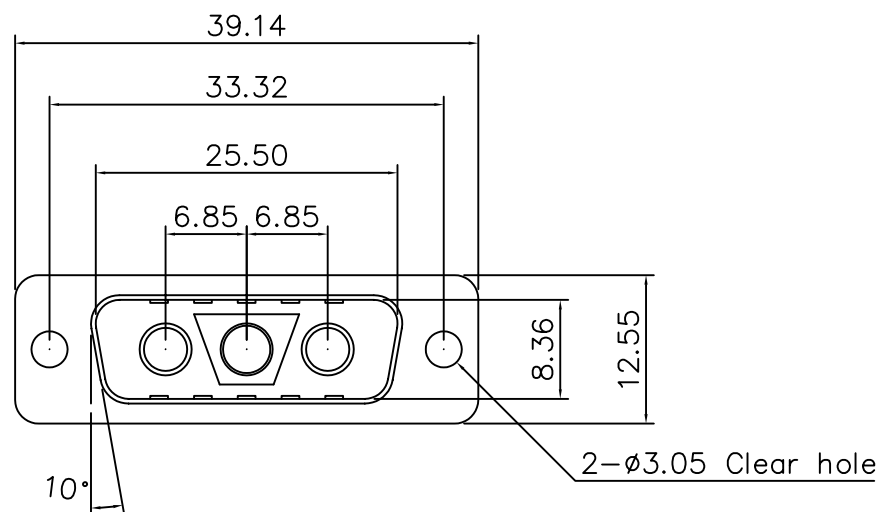

Specifications:

Electrical characteristics:

Dielectric Withstanding Voltage : AC 1000V r.m.s.
Insulation Resistance : 5000 Megohms Minimum.
Contact RESistance : 30 Millohms Maximum.
Operating Temperature : -55°C TO +125°C

Mechanical Characteristics:

Contact insertion Force : 4.5Kg Maximum.
Contact separator Force : 0.3Kg Minimum.

Materials:


Insulator : PBT UL 94V-0 Rated


Color : K=Black ; G=Green

Shell : STEEL

Finishes:

Shell : TIN Plated over Nickel

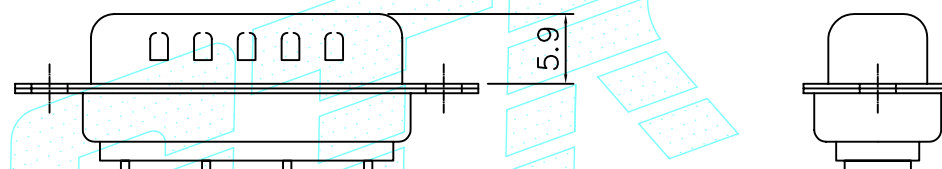

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION		GOLD-TEK ELECTRIC CO., LTD.	
LINEAR		ANGLE				
X. ± 0.50	X° ±	UNITS	MM	TITLE	PART NO.	
.X ± 0.25	.X° ±				DA3V3PS0*N	
.XX ± 0.15	.XX° ±				CAD NO. I268	SHEET
.XXX±	.XXX° ±				F:\Drw\DSUB\DSUB-0095 1 OF 1	
APPD		SCALE	A4	CPART NO.	圖面編號:GTKSD1528-C(1)	
CHKD		SIZE				
DRAW	Z.					
	JUN. 08' 2011					