
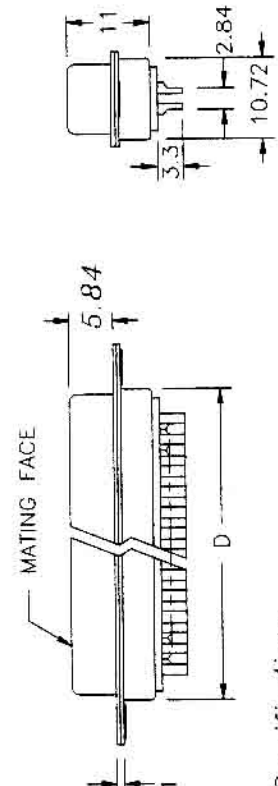
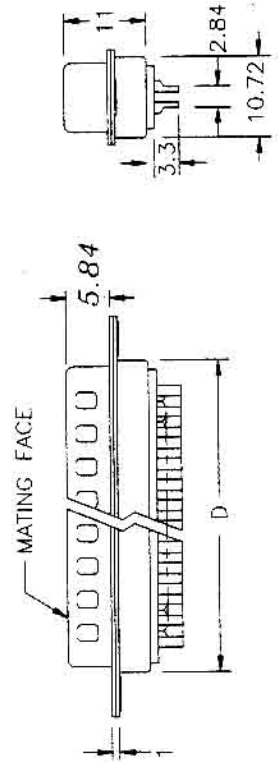
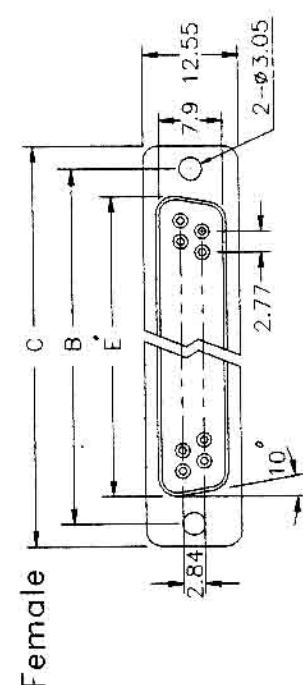


# D-SUB SOLDER TYPE

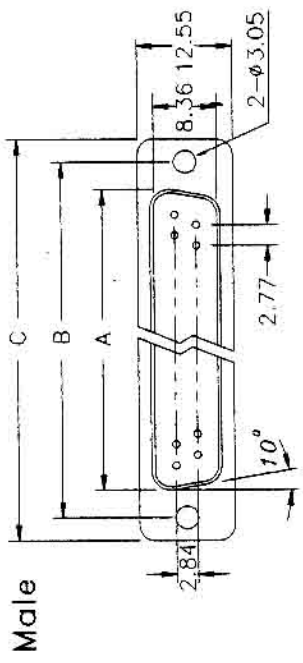

**Specifications:**

Contact Resistance: 30mΩ max. at DC 100mA

Insulator Resistance: 1000MΩ min. at DC 500V

Current Rating: 5 AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute

Operating Temperature: -55°C ~ +105°C

Contact: Brass or Phosphor Bronze

Housing: PBT & 30% Glass Fiber (UL 94V-0)



Position	Dimension				
	A±0.25	B±0.25	C±0.5	D±0.25	E±0.25
9	16.92	24.99	30.81	19.28	16.33
15	25.25	33.32	39.14	27.51	24.66
25	38.96	47.04	53.04	41.30	38.38
37	55.42	63.50	69.32	57.71	54.84
50	52.86	61.11	66.90	55.30	52.34

**億群電氣股份有限公司**  
GOLD-TEK ELECTRIC CO., LTD.

PART-NO: D*****	APPROVALS	DATE
DESCRIPTION:	DRAWN Tao.Tao.	09/14/99
DWG NO. 32	CHECK <i>[Signature]</i>	PAGE
SCALE	CATALOG NO.	

DWG NO. 32

圖面編號:GTKSD0450