



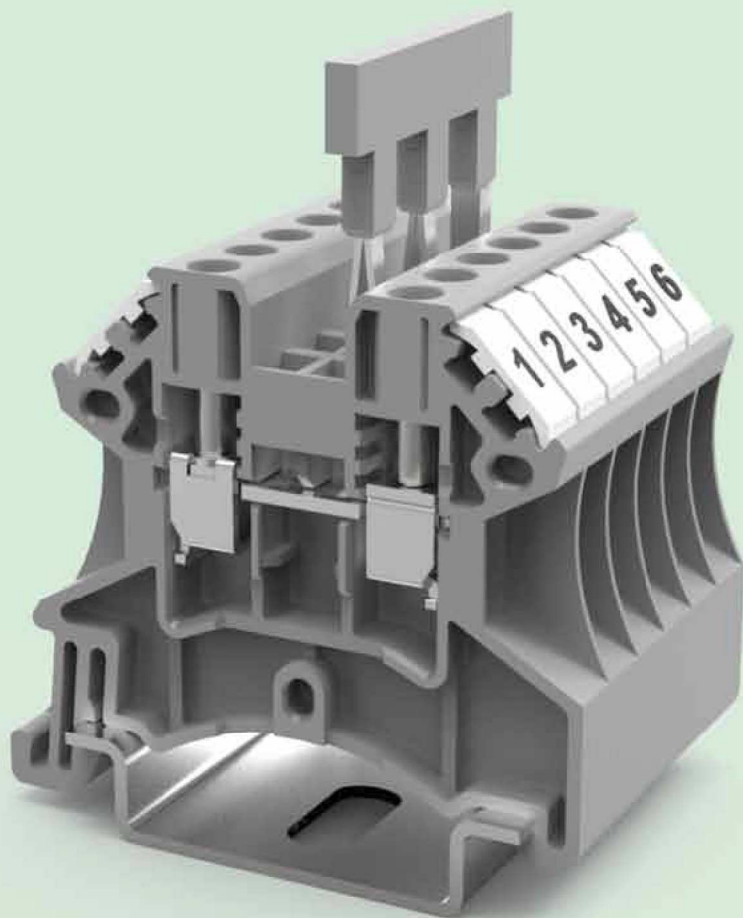

DC2.5

- 紧凑型结构设计,可固定于NS35 轨道;
- 载流体采用紫铜材料,保证良好的电气性能;
- 螺钉连接结构,接线牢固;
- 插入式桥接附件,提供02P-10P多种选择;
- 最大线径: 2.5mm²。
- Compact Structure Design,Fixed on NS35 ;
- Copper Current Carrier,Fine Electrical Performance ;
- Connecting Structure with Screw,Secure Connecting ;
- Plug-in Jumping Accessories; 02P-10P Available ;
- Max Wire Diameter:2.5mm².

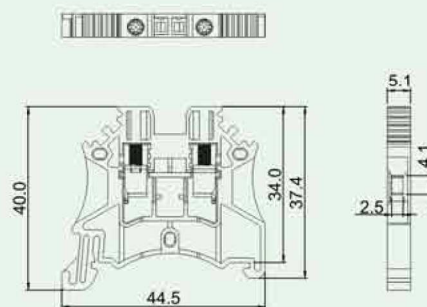

技术参数 Technical Data

APPROVAL: CE

型号 Model	线径 Wire range	线数 Poles	IEC60947技术参数(IEC60947datasheet)		UL1059技术参数(UL1059 datasheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DC2.5	0.2-2.5mm ² /22-12AWG	01P	1000	24	600	20

应用行业 Application


工业自动化、机械、电梯、电力电气等行业。
Industrial automation, machinery, elevator, electric power etc.



产品包装方式 Packing

Product model	Pcs./Pkt.
DC2.5	25

附件 Accessory



型号对照 Cross Reference

DEGSON	同行1/ Competitor1	同行2/ Competitor2
DC2.5	TB2.5	DK2.5N

产品订货 How to order

DC2.5	X X	P	1 1	0 0 AH
Series No.	No. of Pole			Standard
		1 Single pitch 2 Double pitch		通用色 General Color PANTONE 430C Grey DEGSON 01

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated voltage/current : 600V / 25A
- 2.Withstanding voltage : AC2200V/1Min.
- 3.Torque value : M2.5 , 3.54Lb.in
- 4.Wire range : 26~12AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8KV
Rate voltage(V)	800V
Rate current(A)	24A





- 2.Torque value : M2.5 , 0.4N·m
- 3.Wire range : 0.2~2.5mm²

NOTES2:


- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.1mm, Poles : N=01P
- 3.Stripping length : 8~9mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch Range In mm			Nominal Dimension Range In mm					—	∩	∇
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'		

6.RoHS Compliance

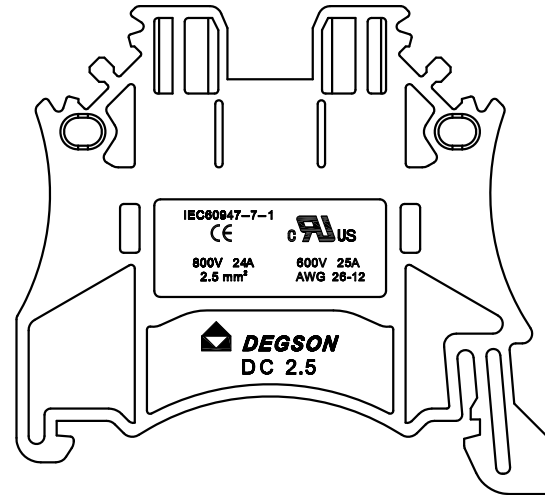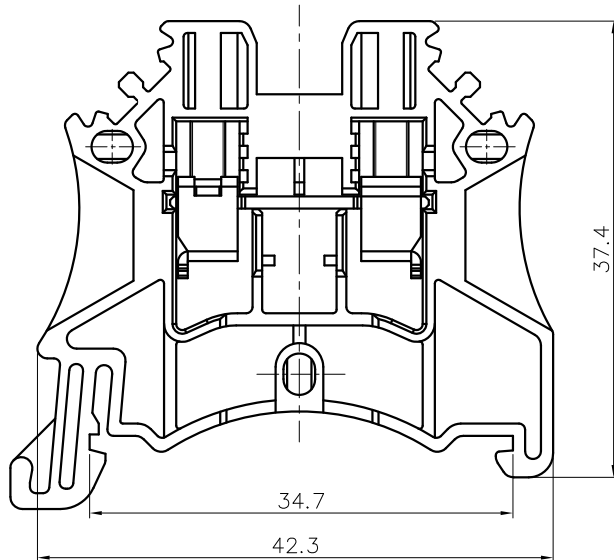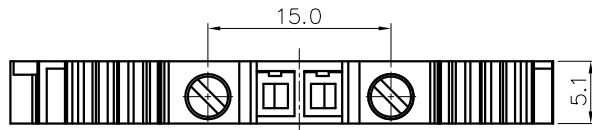

DC2.5 - 01P - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)
(RoHS)
00A-(Standard)

DETACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSN ELECTRICAL CO., LTD			
	APPD: /		NAME: DC2.5-01P-1Y-00A(H)			
	CHKD: /					
	DRFT: /		TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET	1/1
		 MM (INCH)		DO NOT SCALE DRAWING	SCALE	1:1

DO NOT SCALE DRAWING