
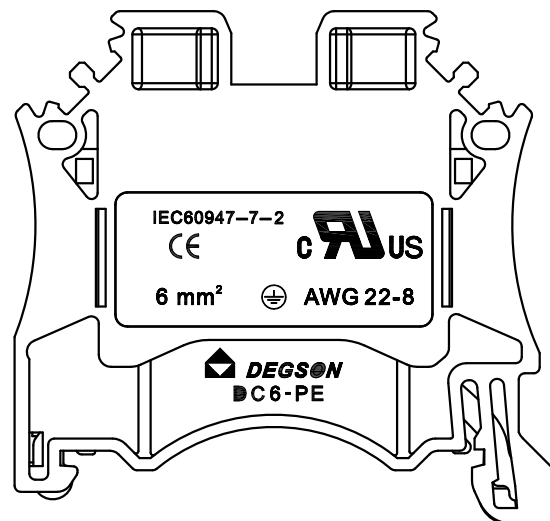

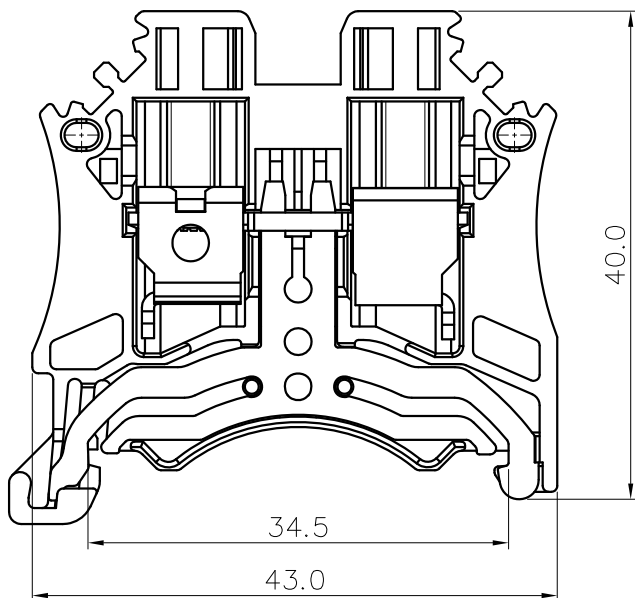


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

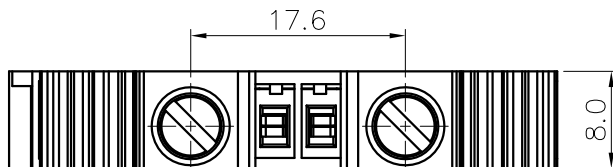

NOTES1:

UL Standard

- 1.Torque value : M4 , 14Lb.in
- 2.Wire range : 22~8AWG

IEC Standard

- 1.Torque value : M4 , 1.2N·m
- 2.Wire range : 0.5~6mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 8.0mm, Poles : N=01P
- 3.Stripping length : 10~12mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch Range In		Nominal Dimension Range						0.1/10 mm
mm								
Over 6	Over 10		Over 30	Over 60	Over 100	Over 150		
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

DC6-PE - 01P - 1C - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)
C.(Yellow and green)

DETACHED LISTS	PART NO.:	/				NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME: DC6-PE-01P-1C-00A(H)			
	CHKD:	/				TITLE: CUSTOMER DRAWING			
	DRFT:	/				REV			
THIRD ANGLE PROJECTION		DRAWING NO.: /				SHEET		1/1	
		DO NOT SCALE DRAWING				SCALE		1:1	