


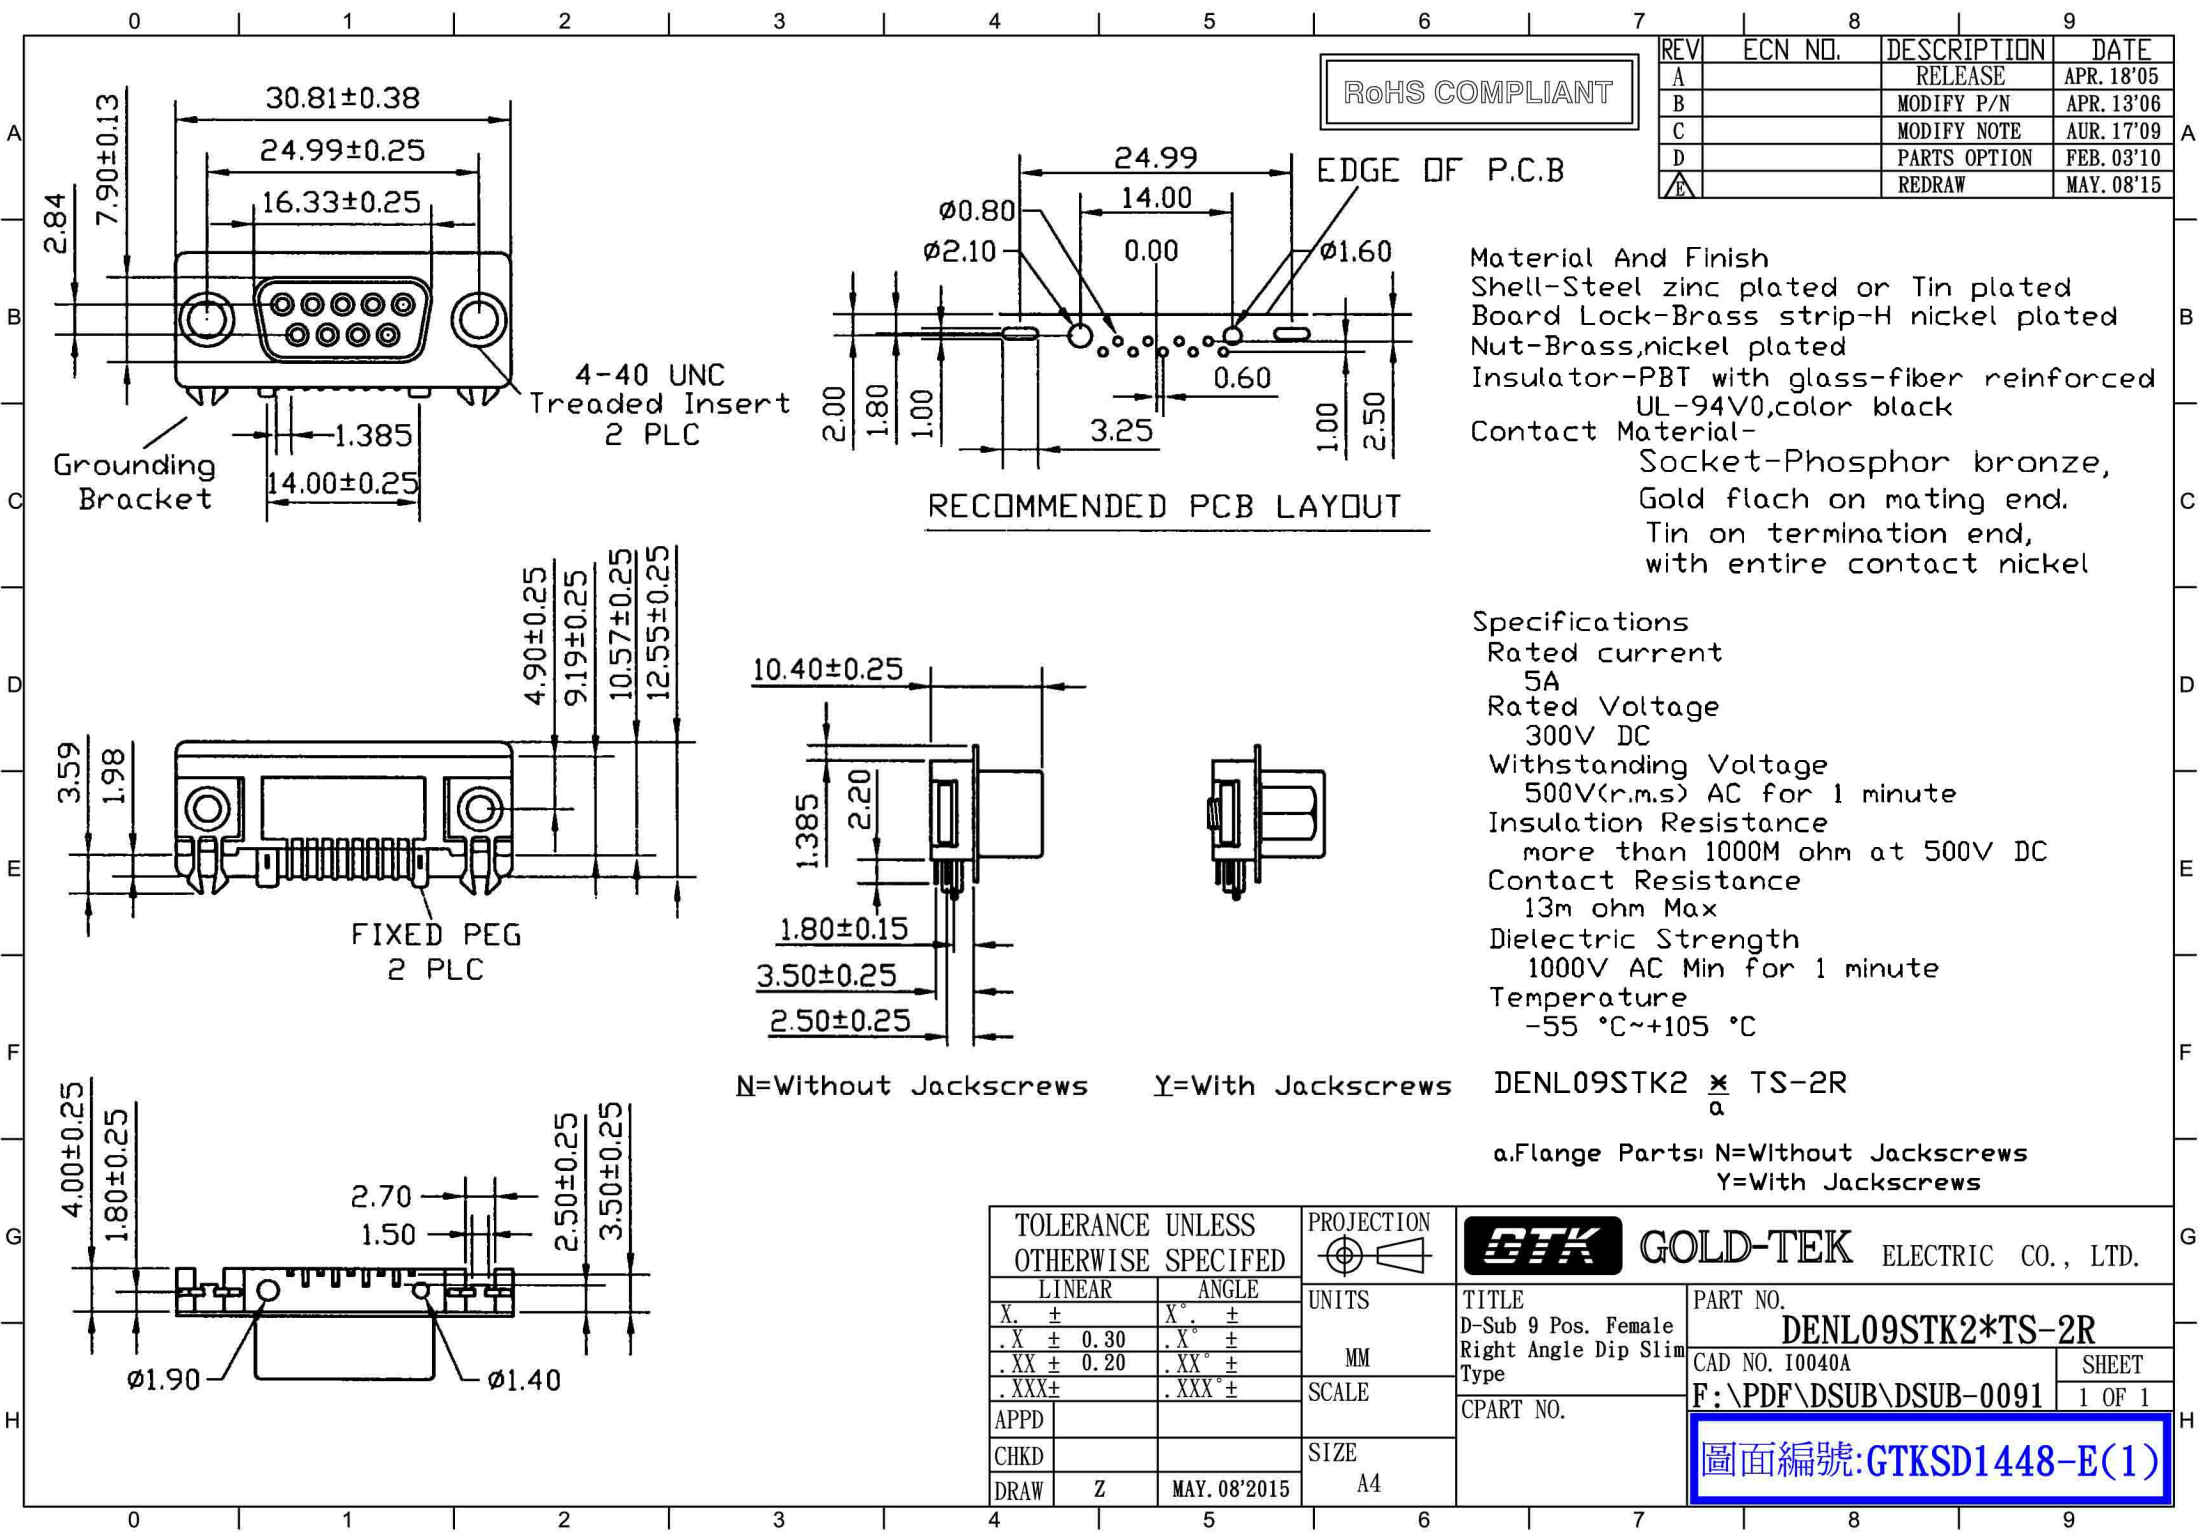

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	APR. 18'05
B		MODIFY P/N	APR. 13'06
C		MODIFY NOTE	AUR. 17'09
D		PARTS OPTION	FEB. 03'10
E		REDRAW	MAY. 08'15

Material And Finish
Shell-Steel zinc plated or Tin plated
Board Lock-Brass strip-H nickel plated
Nut-Brass,nickel plated
Insulator-PBT with glass-fiber reinforced
UL-94V0,color black
Contact Material-
Socket-Phosphor bronze,
Gold flach on mating end.
Tin on termination end,
with entire contact nickel

Specifications
Rated current
5A
Rated Voltage
300V DC
Withstanding Voltage
500V(r.m.s) AC for 1 minute
Insulation Resistance
more than 1000M ohm at 500V DC
Contact Resistance
13m ohm Max
Dielectric Strength
1000V AC Min for 1 minute
Temperature
-55 °C~+105 °C

N=Without Jackscrews Y=With Jackscrews DENL09STK2 ~~X~~ TS-2R
a

a.Flange Parts: N=Without Jackscrews
Y=With Jackscrews

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION		GOLD-TEK ELECTRIC CO., LTD.	
LINEAR		ANGLE	UNITS		TITLE	
X. ±		X° ±	MM		D-Sub 9 Pos. Female Right Angle Dip Slim Type	
.X ± 0.30		.X° ±	SCALE		PART NO.	
.XX ± 0.20		.XX° ±	SIZE		CAD NO. 10040A	
.XXX±		.XXX° ±	A4		F:\PDF\DSUB\DSUB-0091	
APPD					CPART NO.	
CHKD						
DRAW	Z	MAY. 08'2015				

圖面編號:GTKSD1448-E(1)