
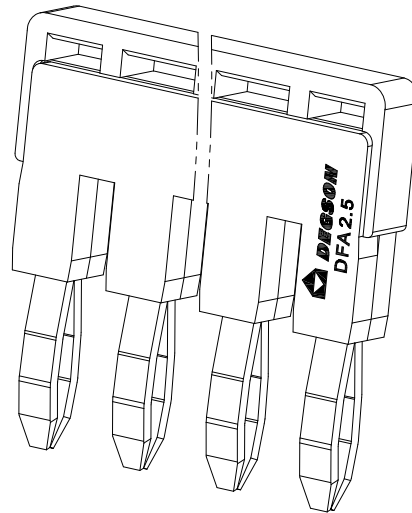
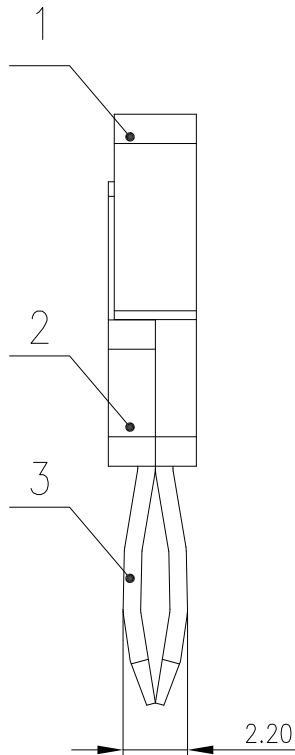
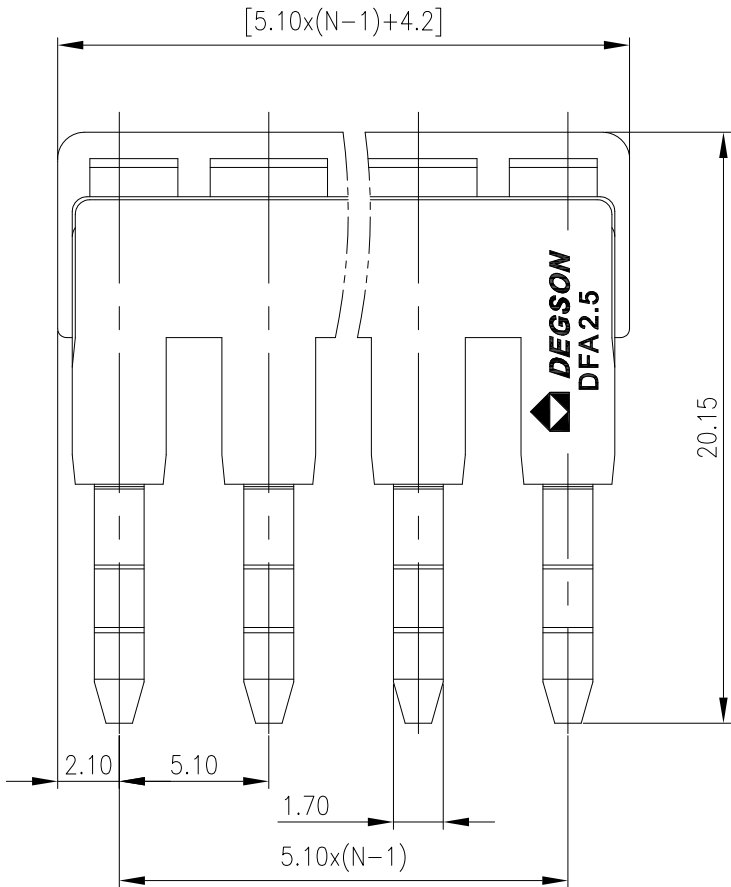




3	Current carrier	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线数范围/Poles			5.10/N=02~10P
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes
拼接面断差/Splicing plane difference			≤0.30mm

MATERIAL: /		SURFACE: /	
MAT NO.:		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: Li GL 2021.03.09		NAME: DFA2.5-XXP-1Y-00A&Z(H)	
CHKD: Mao J 2021.03.09			
DRFT:ZhengQG 2021.02.26		DRAWING NO.: DFA2.5-C01	
 SIZE: A4		REV TO	
		TYPE: CUSTOMER DRAWING	
		SCALE: 4:1	
		SHEET 1/1	

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文档的内容。侵犯者将负法律责任。 本公司保留对涉及发明、实用新型和外观设计的所有权利。