

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利、实用新型或外观设计注册外，所有权利均保留。未经授权，禁止复制或传播本文件内容。违反者将承担法律责任。

FOR-1755 Rev.2.1

2

3




4

5

6

未注公差/General tolerances (mm)														0.1/10
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

间距/Pitch(mm)/线数范围/Poles		5.08/N=02~24P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
2	Current carrier	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

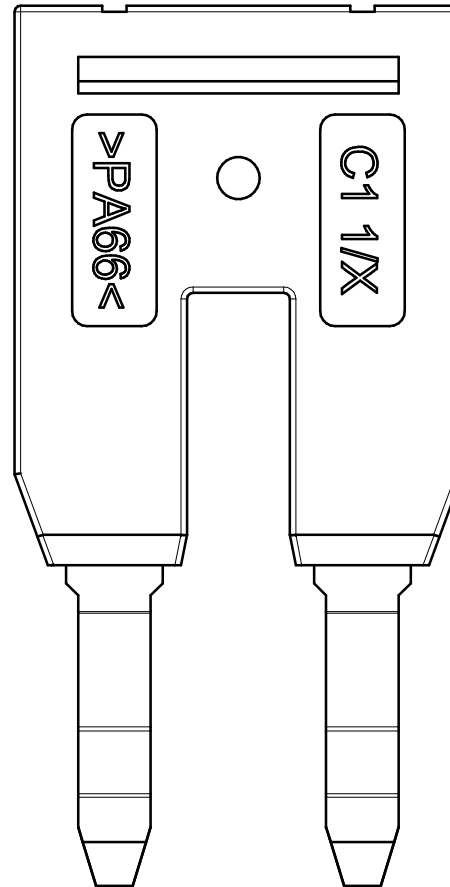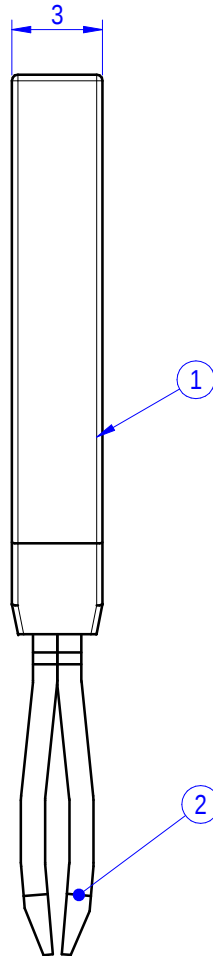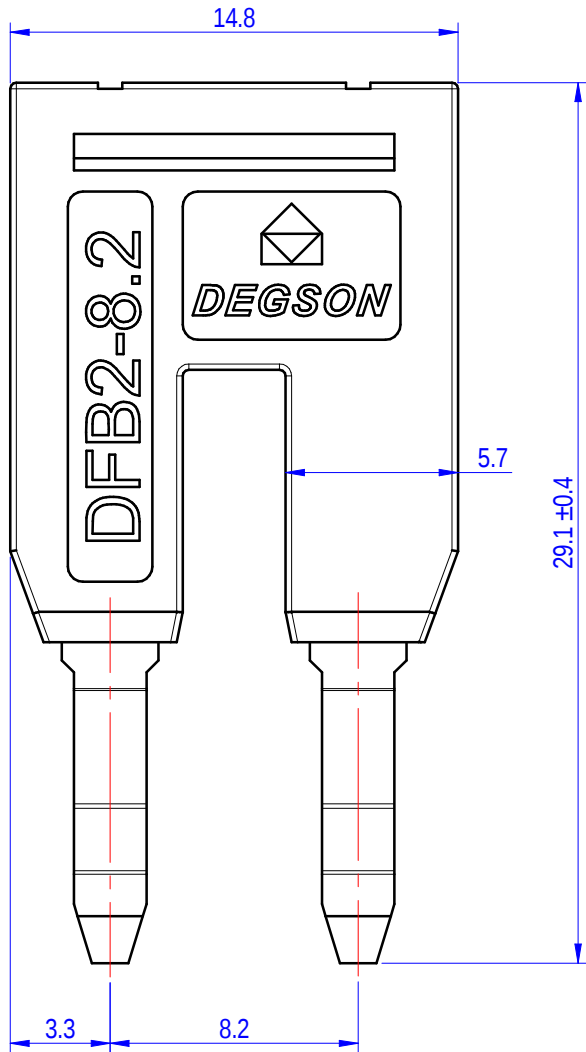

DFB 2 - 8.2 - 16 - 00Z (H)
(Series No.) (Poles) (Pitch) (Single Pitch)
(RoHS)
00Z-(Standard)
(Color): 6.(Red)

			MATERIAL:		SURFACE/COLOR:		
			MAT NO./REV: 11060000394-1 / 00.03		MAT STATUS: 批量		
APPD: 李根芳	2024.06.25		NAME				
CHKD: 马恩开	2024.06.25		DFB2-8.2-16-00A&Z (H)				
DRFT: 郑启国	2024.06.25		DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
 A4			200288449	CUSTOMER DRAWING	work	4:1	1/1

00		NEW DRAWING	郑启国	2024.06.25
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6