


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1	12-150	应客户要求修改焊脚长度公差及VME参差	CHEN	09/07/12

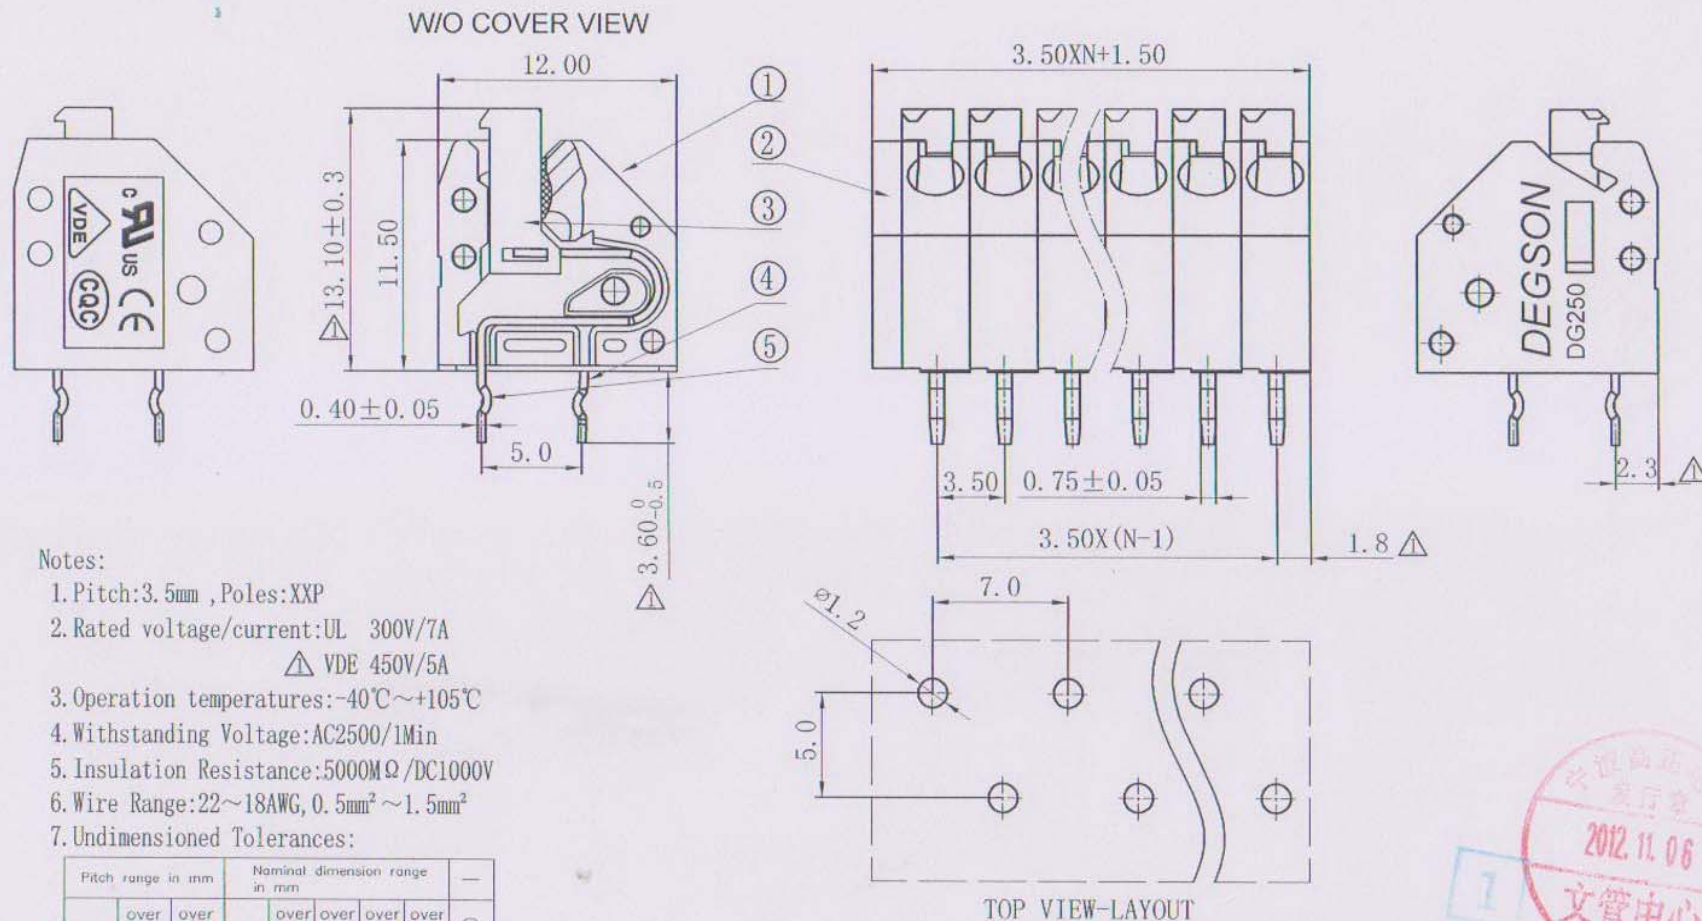


Notes:

1. Pitch: 3.5mm , Poles: XXP
2. Rated voltage/current: UL 300V/7A
△ VDE 450V/5A
3. Operation temperatures: -40℃ ~ +105℃
4. Withstanding Voltage: AC2500/1min
5. Insulation Resistance: 5000MΩ /DC1000V
6. Wire Range: 22~18AWG, 0.5mm² ~ 1.5mm²
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

5	DC250-3.5 big Pin header(自动化)	3018B00090(H)	$\frac{W \times D}{2} \times \frac{L}{2}$	Phosphor bronze	SnCe plated
4	DC250-3.5 small Pin header(自动化)	3018B00100(H)	$\frac{W \times D}{2} \times \frac{L}{2}$	Phosphor bronze	SnCe plated
3	DC250-3.5 Button(自动化)	3018D0Y01D(H)	XX	PA66	UL94V-0
2	DC250-3.5 Cover	3018C0Y01A(H)	1	PA66	UL94V-0

1	DG250-3.5-Housing(自动化)	3018A0Y01C(H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETAILED LISTS	 THIRD ANGLE PROJECTION	DFTO ZYH CHCKD <i>penay</i> MFD APPVL <i>2/6</i>	DATE: 12/24/08 DATE: 11/6/12 DATE: 1/6/12	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED		NAME		
	HM .01 ± .00 ± .000 ±	± ± ±	DG250-3.5-XXP-1Y-00A(H). (自动化)		
	ANGLES ± 1°		DRAWING NO. DG250-3.5-E134		
	G.E :		/PART NO.		
	FINISH:		SIZE: A4		
	SCALE : 1:1		09/07/12 T1		
	DO NOT SCALE DRAWING		SHEET 1 OF 1		