
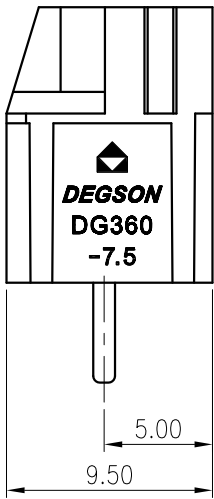
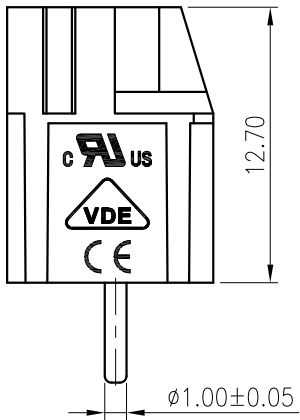
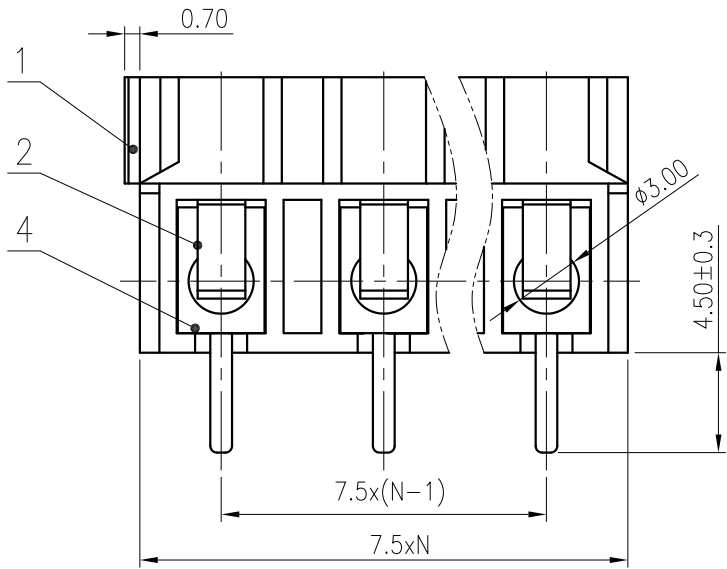
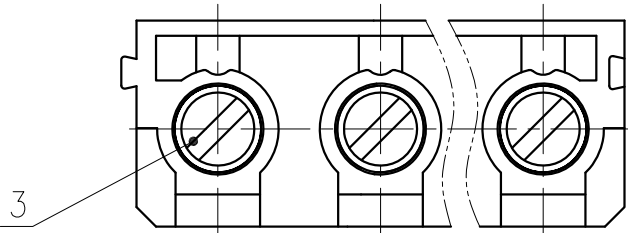


未注公差/General tolerances(mm)														D
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
3	6	10	18	30	50	80	120	180	250	315	400	500		0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

PCB LAYOUT

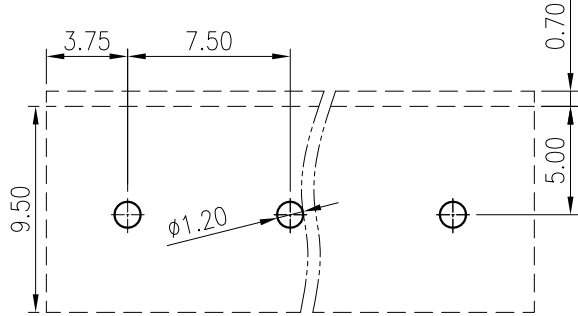

4	Pin header	Copper alloy	M3/Sn plated
3	Screw	Steel	M3/Zn plated
2	Spring	Stainless steel	/
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	/
IEC 标准/IEC Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)		450/24	
工频耐压/Withstanding voltage(V/1Min)		AC2500	
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)		1.0~2.5/22~14	
间距/Pitch(mm)/线数范围/Poles		7.5/N=02~24P	
剥线长度/Stripping length(mm)		6~8	
使用温度范围/Operating temperature(°C)		-30~+120	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL:		SURFACE:			
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
STATUS: /					
APPD: Lan ChH 2020.05.15		NAME: DG360-7.5-XXP-1Y-00A(H)			
CHKD: Yu JZh 2020.05.15					
DRFT: Wu LF 2020.05.15		DRAWING NO.: 10002133		REV	TO
	SIZE: A4		TYPE: CUSTOMER DRAWING		SCALE: 3:1
			SHEET	1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------