
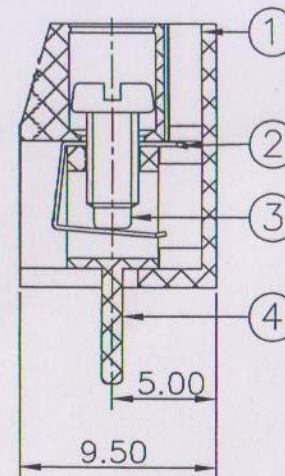


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加UL刻字	CSX	08/06/07
2		增加VDE、CE标志	LJH	12/25/07
3	12-0090	顶部增加斜面, 底部增加圆角	YHG	05/10/12


Notes:

- pitch: 7.5mm
- Rated voltage/current: UL 300V/15A
VDE 450V/24A
- Insulation resistance: 5000MΩ/1000V
- Withstanding voltage: AC2000V/1Min
- Wire range: 22-14AWG 2.5mm²
- Temp. Range: -30° C ~ +120° C
- Torque: 5.10kgf. cm
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to	over	over	to	over	over	over	over	over	
6	6 to 10	10 to 24	30	30 to 60	60 to 100	100 to 150	150	150	0.05/1.0
	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/1.0

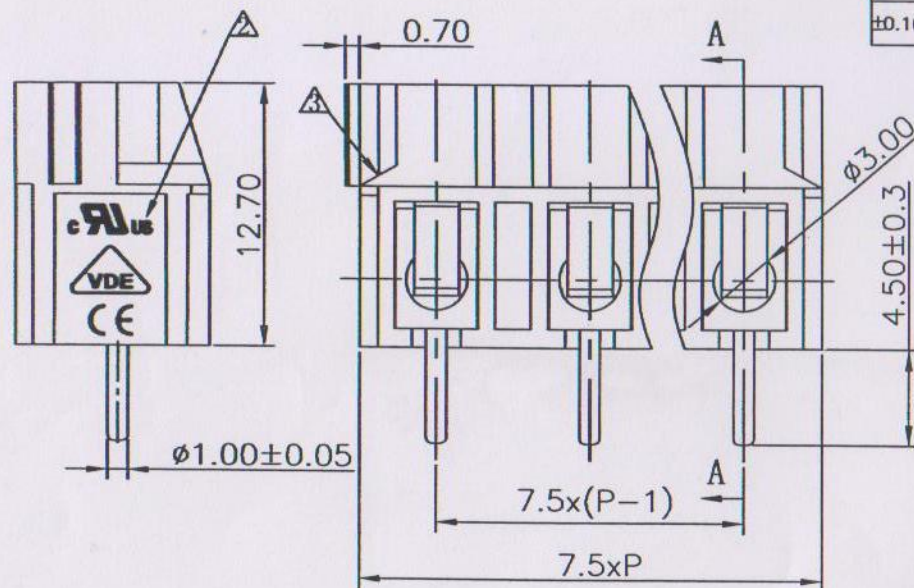

SECTION A-A

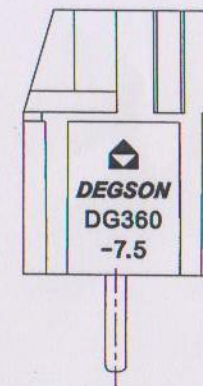

4	DG300 (A)-Pin header	4001B00010 (H)	XX	Brass	SnCe
3	DG300-Screws	S000001380 (H)	XX	Steel	3 rd Cr Zn
2	DG300-Spring	X000000230 (H)	XX	Stainless steel	

1	DG360-7.5-Housing	4009A0YXXA (H)	1	PBT	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
MM (INCH) TOLERANCES EXCEPT AS NOTED MM .0 ± .00 ± .000 ± ANGLES ± 1° THIRD ANGLE PROJECTION DFTD Home DATE 04/06/06 CHKD DATE MFO DATE APPR. DATE 05/11/12 MATERIAL: G.E.: FINISH: SCALE: 1:1 NAME DG360-7.5-XXP-1Y-00A(H) DRAWING NO. DG360-7.5-E04 /PART NO. DO NOT SCALE DRAWING 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD SIZE A3 REV T3 25/10/12					
				SHEET 1	OF 1

