
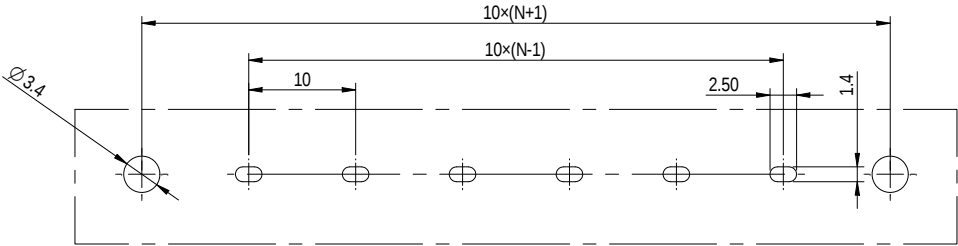

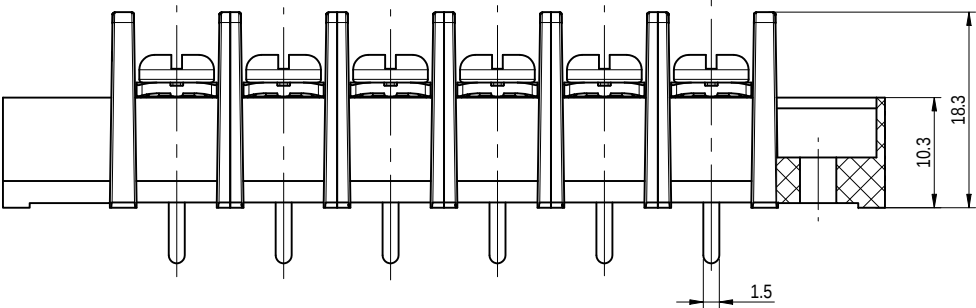



公差/General tolerances (mm)														D
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2

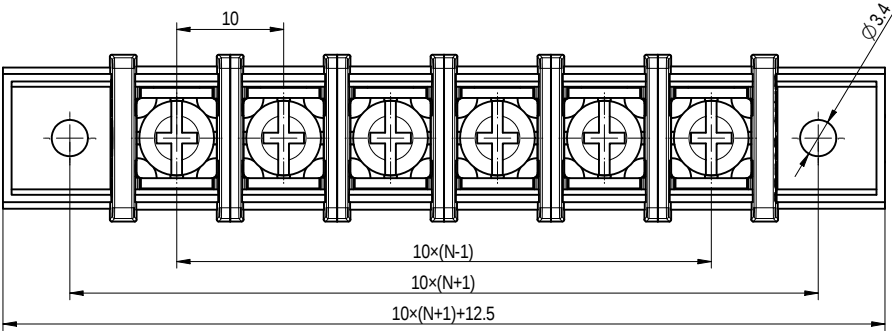

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard		B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)		300/20	/	300/10
IEC 标准/IEC Standard				
额定电压/电压/Rated Voltage(V)/Current(A)		450/32		
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M4, 1.38/12.24		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		22~12		
间距/Pitch(mm)/线数范围/Poles		10.0/N=02~24P		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

		MATERIAL: PA66		SURFACE/COLOR:	
MAT NO./REV:		/ 00		MAT STATUS: 批量	
APPD: 蓝荣凡	2024.07.16	NAME			
CHKD: 朱伟明	2024.07.16	DG55C-A-XXP-1Y-00Z(H)			
DFT: 孙科豪	2024.07.16	DRAWING NO.	TYPE	DRAWING STATUS	SHEET
A3		/	PRODUCT DRAWING	已发布	2:1 6/6

REV	ECN	DESCRIPTION	DFT	DATE
00				