
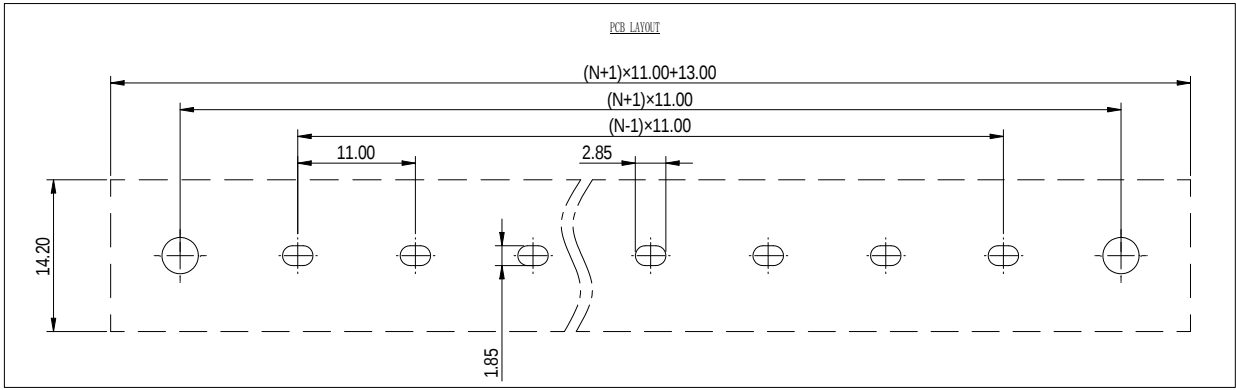
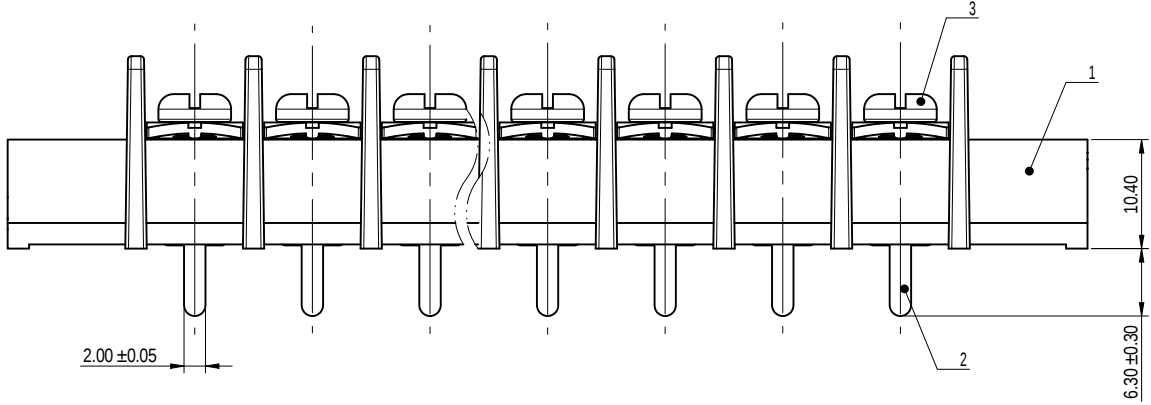



公差/General tolerances (mm)															D
0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'	0.1/10

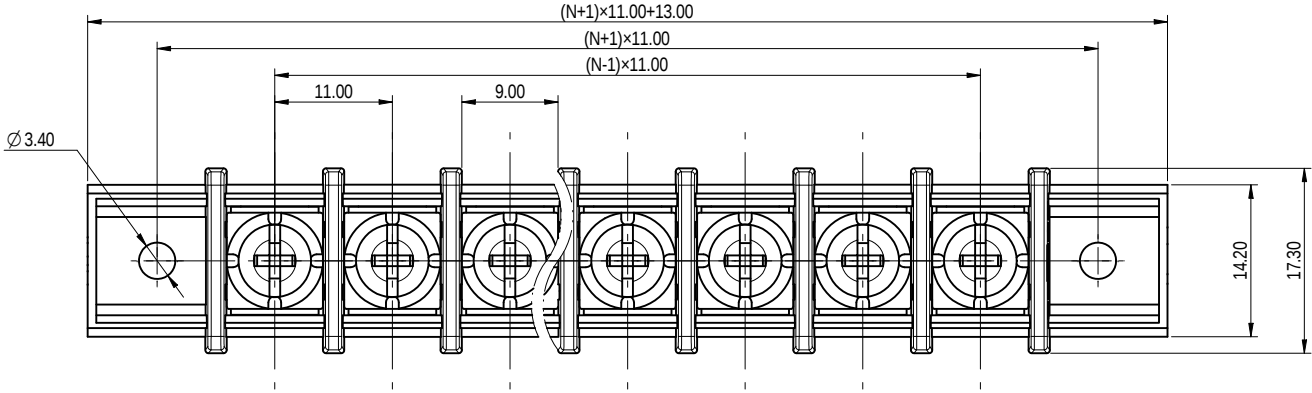

3	Screw	Steel	Sn Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)			300/30
螺丝扭矩/Torque Tightening(N·m/Lb.in)			M4, 1.15/10.53
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)			22-10 / 0.34-6
间距/Pitch(mm)/线数范围/Poles			11.00/N=02-20P
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes

		MATERIAL:		SURFACE/COLOR:	
APPD: 蓝黄凡		MAT NO./REV: - / 00		MAT STATUS: 批量	
CHKD: 曹利彬		NAME:		DG65C-A-XXP-1Y-00Z(H)	
DRFT: 姜民浩		DRAWING NO.		TYPE	
2024.05.30		200056176		CUSTOMER DRAWING	
2024.05.30		DRAFT STATUS		SCALE	
2024.05.30		已发布		2:1	
2024.05.30		SHEET		1/1	

00	ECN	DESCRIPTION	姜民浩	2024.05.30
REV	ECN	DESCRIPTION	DATE	