

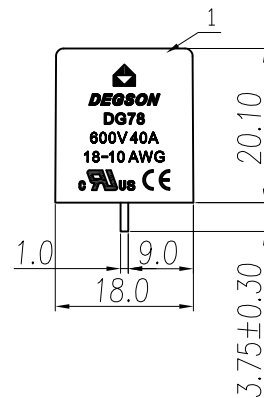
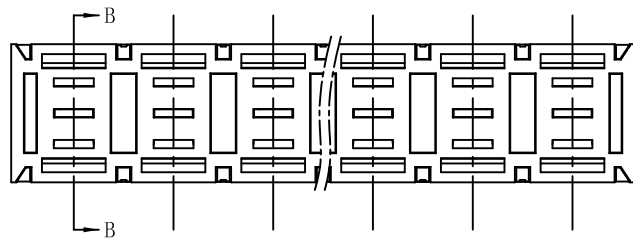
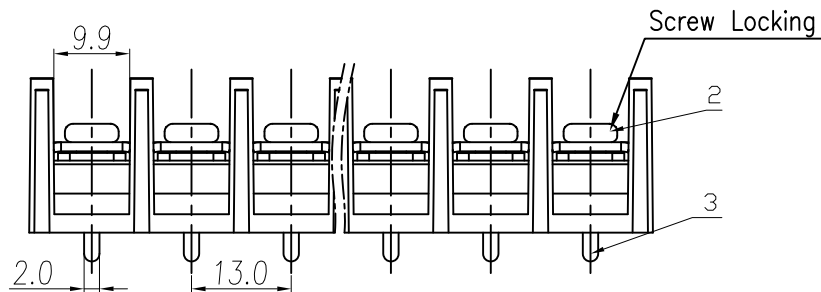


未注公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

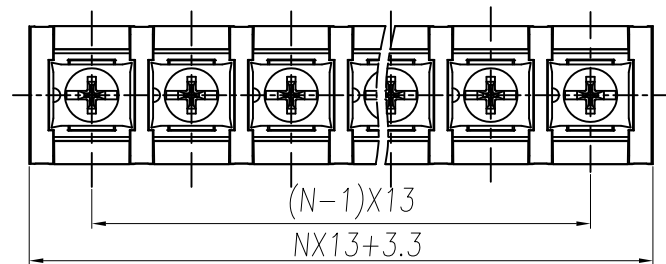

SECTION B-B

DG78C-B - 08P - 13 - 08Z (H)
(Series No.) (Poles) (Single Pitch) (Color): 3.(Black)
(RoHS)
08Z-(Customer Request)

ITEM	NAME OF PART	MATERIAL	NOTES
3	PIN HEADER	Brass	Sn plated
2	SCREW	STEEL	Ni plated
1	HOUSING	PA66+GF	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/40	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	450/32	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M4, 12.24kgf.cm		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	18~10AMG		
间距/Pitch(mm)/线数范围/Poles	13.00/N=2~20P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

			MATERIAL:	/	SURFACE/COLOR:	表面处理
			MAT NO./REV:	00	MAT STATUS:	批量
APPD:	/	/	NAME			
CHKD:	ZYH	2023.05.04	DG78C-B-08P-13-08Z (H)			
DRFT:	SYT	2023.05.04	DRAWING NO.	/	TYPE	CUSTOMER DRAWING
REV	ECN	DESCRIPTION	DRFT	DATE	DRAWING STATUS	SHEET
					SCALE	1:1
						1/1