

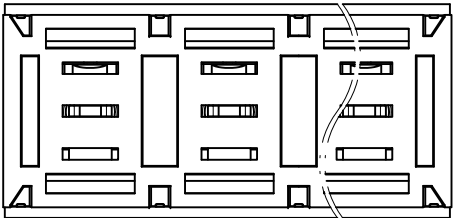
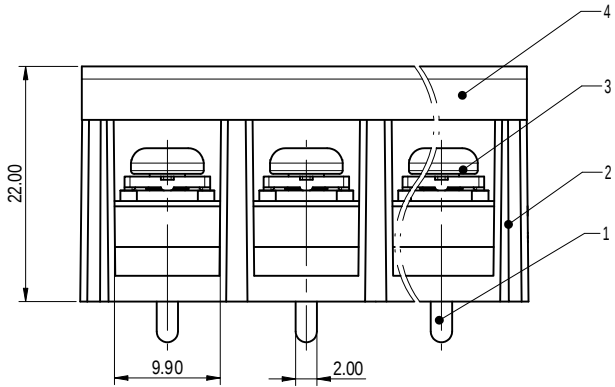
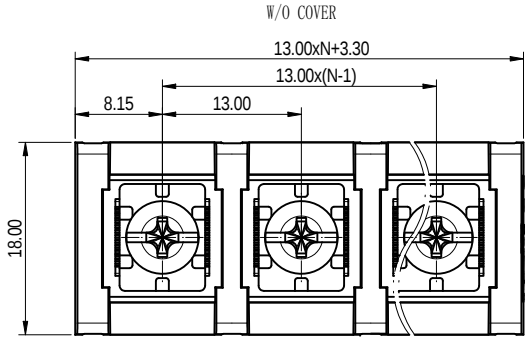
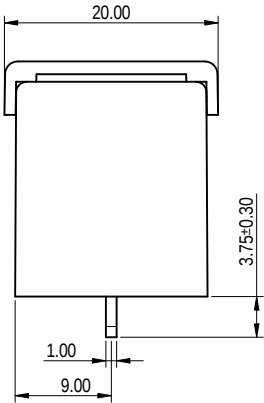


Unauthorized duplication or distribution of this document, in whole or in part, is prohibited. All rights reserved for patent.



General tolerances (mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
UL Standard:										B	C	D	
Rated Voltage/Current (V)/Current (A)										600/40	600/40	600/5	
UL Withstand Voltage/R.M.S withstand voltage										AC2000V/1Min			
Screw Tightening (N·m/Lb.in)										M4, 1.2/10.5			
Wire Range (rigid and flexible) (AWG)										18-10			
Pitch (mm)/Line Number/Poles										13.00/N=02-20P			
Operating temperature (°C)										-40~+105			
Conform to RoHS										Yes			

Unmarked dimensions refer to 3D model

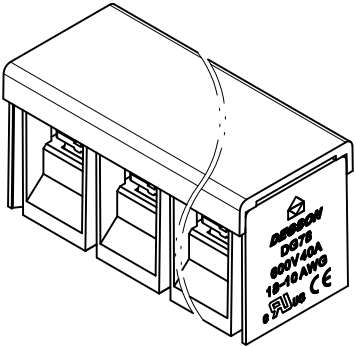

Notes: The A&Z(H) in the name means:A(H) and Z(H)

4	Cover	PC	UL94V-2
3	Screw	Steel	Ni Plated
2	Housing	PA66+GF	UL94V-0
1	Pin header	Copper alloy	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

DEGSON		MATERIAL: /		SURFACE/COLOR: /	
APPD: 蓝黄凡		MAT NO./REV: /		MAT STATUS: 批量	
CHKD: 曹利彬		NAME		DG78C-B-XXP-1Y-00A&Z(H)	
DRFT: 汪德荣		DRAWING NO.		TYPE	
00		2022.11.24		CUSTOMER DRAWING	
REV		ECN		DRAWING STATUS	
/		/		已发布	
DESCRIPTION		DATE		SCALE	
/		2022.11.24		2:1	
DRAFT		A3		SHEET	
/		/		1/1	