

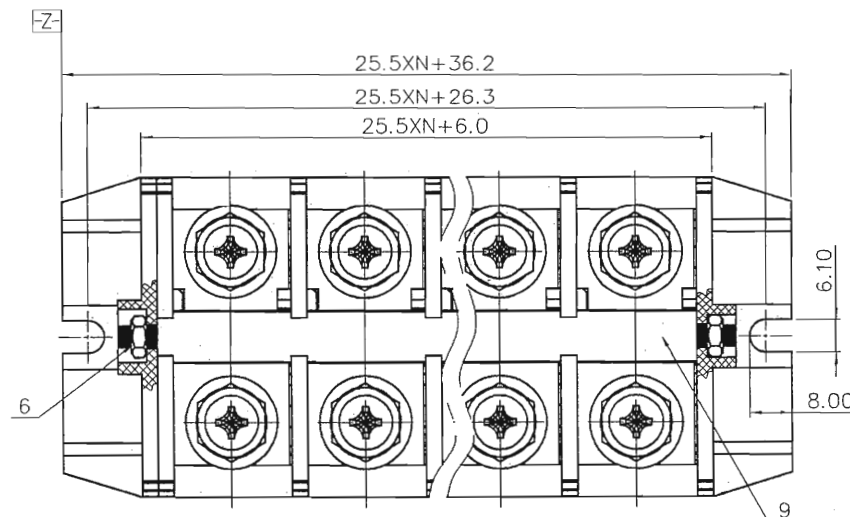


REVISION RECORD



REV	ECN	DESCRIPTION	DRFT	DATE



NOTES:

- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
- 2.PITCH: 25.5MM ,POLES:N=02-11P
- 3.RATED VOLTAGE/CURRENT:UL 600V/101A
- 4.OPERATION TEMPERATURES: -40℃~+120℃
- 5.WITHSTANDING VOLTAGE: AC3500V/1MIN.
- 6.WIRE RANGE: 20~2AWG,35.0MM²
- 7.TORQUE VALUE:M8,60LB.IN(6.74N.M)
- 8.UNDIMENSIONED TOLERANCES:

PITCH RANGE IN MM		NOMINAL DIMENSION RANGE IN MM						
TO	OVER	TO	OVER	TO	OVER	TO	OVER	
6	10	10	10	30	60	100	150	
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±0.05/10

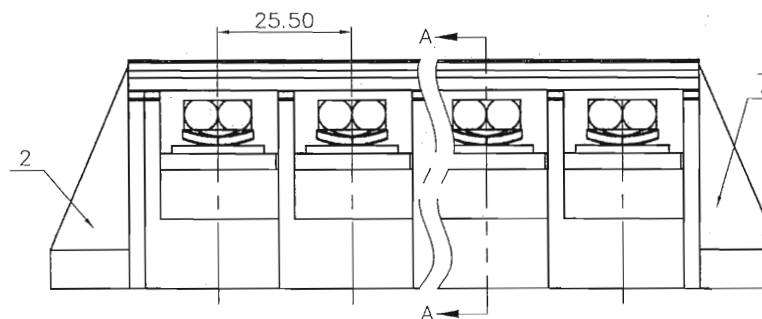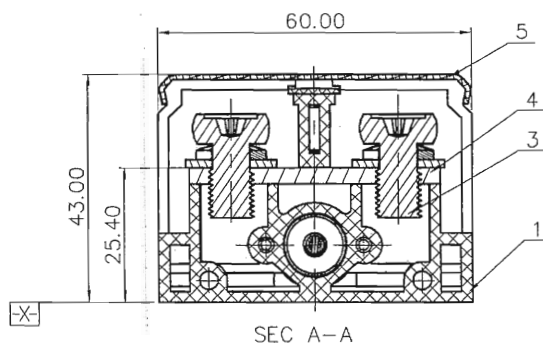

Connect pillar Refer to table "H"

POLES(N)	NO. OF PART	L(mm)	POLES(N)	NO. OF PART	L(mm)
06P	S000004990(H)	167.0			
05P	S000005150(H)	141.5	11P	S000005010(H)	294.5
04P	S000004960(H)	116.0	10P	S000005180(H)	269.0
03P	S000005250(H)	90.5	09P	S000005000(H)	243.5
02P	S000005240(H)	65.0	08P	S000005170(H)	218.0
01P	S000007690(H)	39.5	07P	S000005160(H)	192.5

文管中心
研发专用

2015.05.20

(仅限内部使用, 对外无效)

5	DGB100-A-10A COVER	6182C07XXA(H)	1	PC	UL94V-2
4	DGB100-A-10A CURRENT CARRIER	6182B00010(H)	XX	BRASS	Ni Plated
3	M8.0*16 "+" SCREW	S000004800(H)	XX*2	STEEL	Zn Plated
2	DGB100-A-10A HOUSING(1)	6182AYY01C(H)	1	PC	UL94V-0
1	DGB100-A-10A HOUSING	6182AYY01A(H)	XX	PC	UL94V-0

ITEM NAME OF PART NO. OF PART Q"TY MATERIAL NOTES

MATERIAL:		FINISH:		PART NO.:		NAME:	
TOLERANCES EXCEPT AS NOTED		PART NO.:		NAME:		DGB100-A-XXP-1Y-10A(H)	
ANGLES ± 1°		APPD: Aaron 5/11/15		TITLE: ASSEMBLY DRAWING		REV TO	
THIRD ANGLE PROJECTION		CHKD: Jea 5/12/15		DRAWING NO.: DGB100-A-E01		DO NOT SCALE DRAWING	
DRFT: Mickey 01/11/10"		SCALE		N/A		SHEET 1/1	

9	DGR Tag	6180J0905E(H)	1	PVC	UL94V-0
8	M4.0*0.5 Nut	S000004790(H)	2	STEEL	Zn Plated
7	DGB100-A-10A HOUSING(2)	6182AYY01D(H)	1	PC	UL94V-0
6	DGB100-A-10A CONNECT PILLAR	REFER TO TABLE "H"	1	STAINLESS STEEL	