

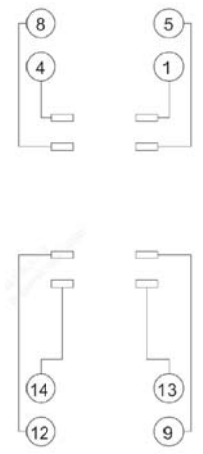


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、传播本文件的内容。侵犯者将承担赔偿责任。 本公司保留对涉及发明、实用新型和外观设计的所有权利。

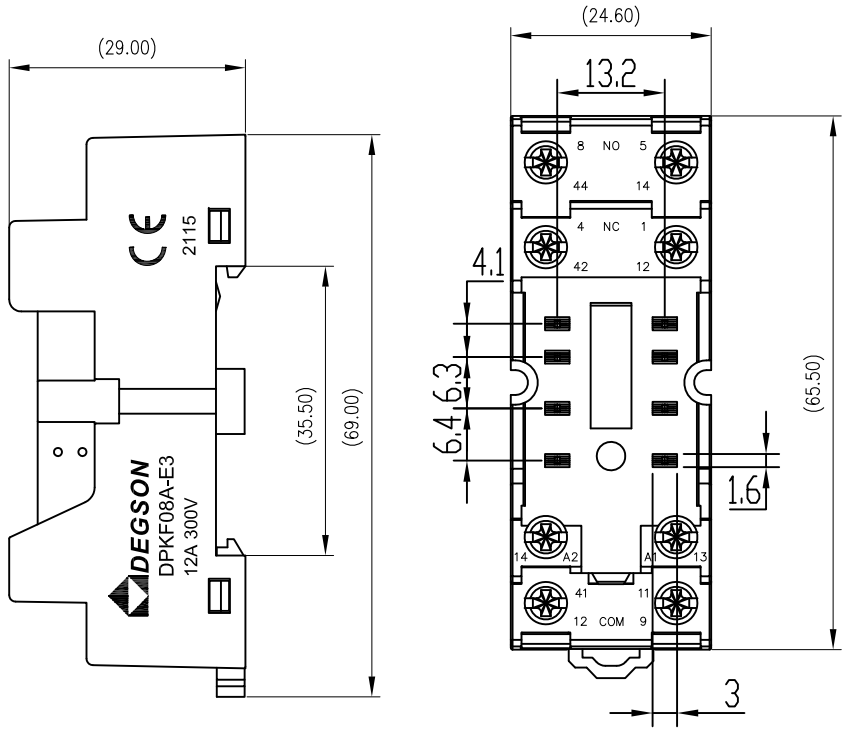

尺寸公差(mm)					 0.05/10 ±1*
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	
额定电流/Rated current					12A
额定电压/Rated voltage					300V
线圈/触点介质耐压/Coil/Contact dielectric voltage					3000V/S
触点间介质耐压/Dielectric voltage between contact					2500V/S
螺钉扭矩/Screw torque					1. 0Nm
外连接导线/External connection wire					20-14/0.5-2.5W G/mm ²
环境温度/Ambient temperature					-40~+85℃
重点管控符号/Key controlled symbol					*
符合RoHS环保要求/Conform to RoHS					
印字为激光打标，印字内容清晰、无断线等/Printing for laser marking,printing content is clear ,no broken line,ect					
印字面按图中脚位参考/Seal literal reference according to the foot position in the drawing					

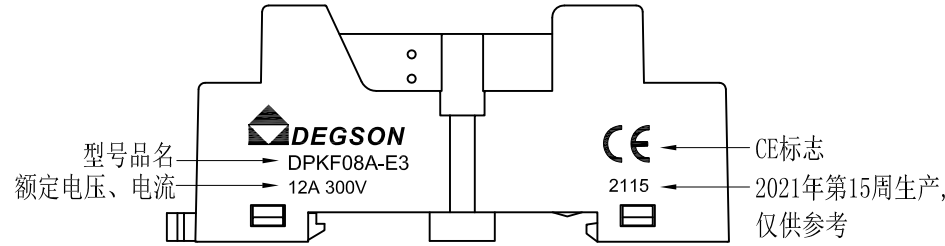

01 备注：1个产品配有2个附件，如下图所示；



MATERIAL: /			SURFACE: /				
MAT.NO.: 30020000049			 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD Description: DPKF08A-E3-00Z(H)				
STATUS: /							
APPD:							
CHKD:							
7	DRFT: Huang XS 2022.04.27			DRAWING NO.: 200065845		REV	01
		SIZE: A4		TYPE: CUSTOMER DRAWING		SCALE: 1:1	SHEET 1/1

01		增加附件说明	Huang XS	2022.04.27
REV	ECN	DESCRIPTION	DRFT	DATE