
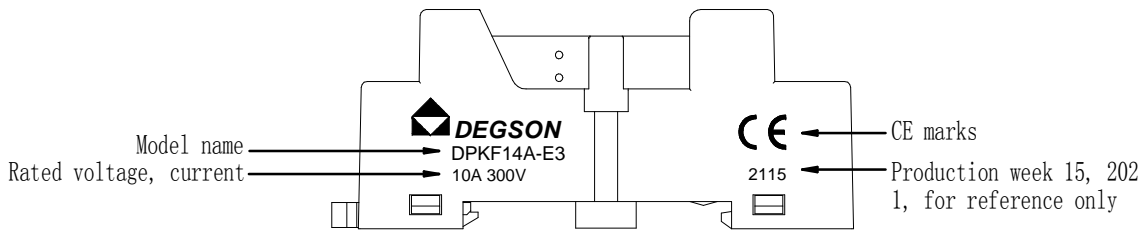
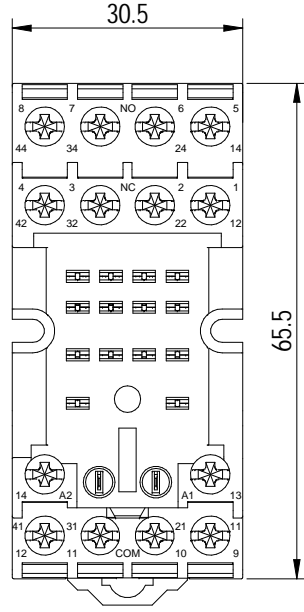



Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicitly authorized by Degson. All rights reserved for patent. 未经授权复制或传播本文件中的任何内容，或在本文件的基础上进行发明、实用新型或外观设计，均属于侵权行为。本公司保留对涉及发明、实用新型或外观设计的所有权利。

公差/General tolerances (mm)													0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

额定电流/Rated current	10A
额定电压/Rated voltage	300V
线圈/触点介电耐压/Coil/Contact dielectric voltage	3000V/S
触点间介电耐压/Dielectric voltage between contact	2500V/S
螺钉扭矩/Screw torque	1.0Nm
外接导线/External connection wire	20-14/0.5-2.5WG /mm <sup>2</sup>
环境温度/Ambient temperature	-40~+85°C
重点管控符号/Key controlled symbol	*
符合RoHS环保要求/Conform to RoHS	
印字为激光打标，印字内容清晰、无断线等/Printing for laser marking, printing content is clear, no broken line, etc.	
印字面按图中脚位参考/Seal literal reference according to the foot position in the drawing.	

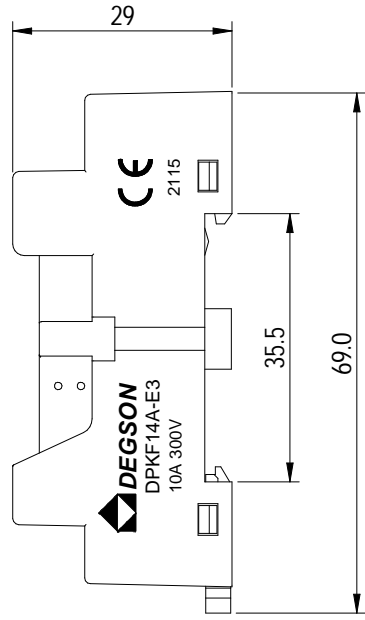

Note: 1 product is equipped with 2 accessories, as shown below:

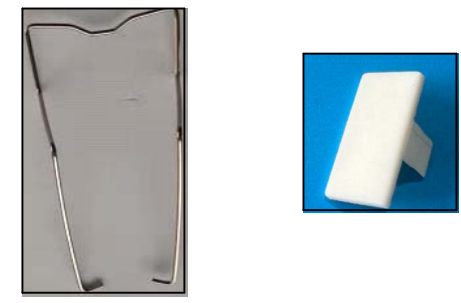

<b>DEGSON</b>			MATERIAL:	SURFACE/COLOR:		
			MAT NO./REV: 30020000050-1 / 00	MAT STATUS: 小批量		
APPD: LGL	2024.04.07	NAME				
CHKD: MEK	2024.04.07	DPKF14A-E3-00Z (H)				
DRFT: GXJ	2024.04.07	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
		200275516	CUSTOMER DRAWING		2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00	/	新图纸下发	GXJ	2024.04.07