



Digitized Automation for a Changing World

Delta Power Meter DPM Series



www.deltaww.com



Delta Power Meter

DPM Series

The DPM Series precisely measures various electrical energy and power quality parameters, including power factors, harmonics, and current/voltage unbalance. This series also features a variety of communication protocols for easy integration with critical power systems and monitoring functions to provide power data, off-limit alarms, and history logs.

Panel Mount Type DPM-C Series



- Real-time data display and easy integration with remote monitoring systems, suitable for general applications in machine rooms

Applications

Distribution board | Electrical room |
Factory/Building energy management system

DIN Rail Mount Type DPM-D Series



- Easy installation and integration for equipment energy management

Applications

High power consuming equipment |
Electrical equipment cabinet | Enclosure

Multi-Loop Type DPM-M Series



- Multiple and selective large-scale circuit monitoring with lots of power circuits to save cost

Applications


Shopping mall | Dormitory | Telecommunication System

High Precision Power Measurement

- Precise measurement of bidirectional electrical energy and power parameters, meeting IEC 62053-22 standards


Built-in Protocols for Easy Integration

- Built-in RS-485 communication port supports Modbus for transmission of all measurement values to the PLCs, PCs and monitoring software

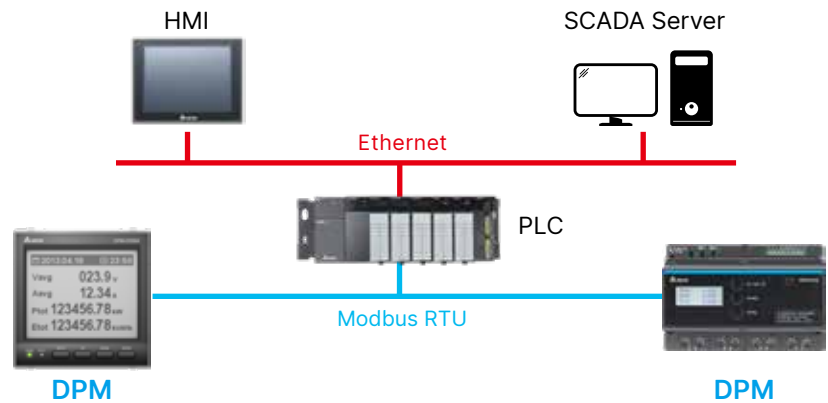


PC-based Configuration Software

- The power meter configuration software DPMSoft collects electricity data and sets up meters via Modbus communication, achieving easy power management and analysis

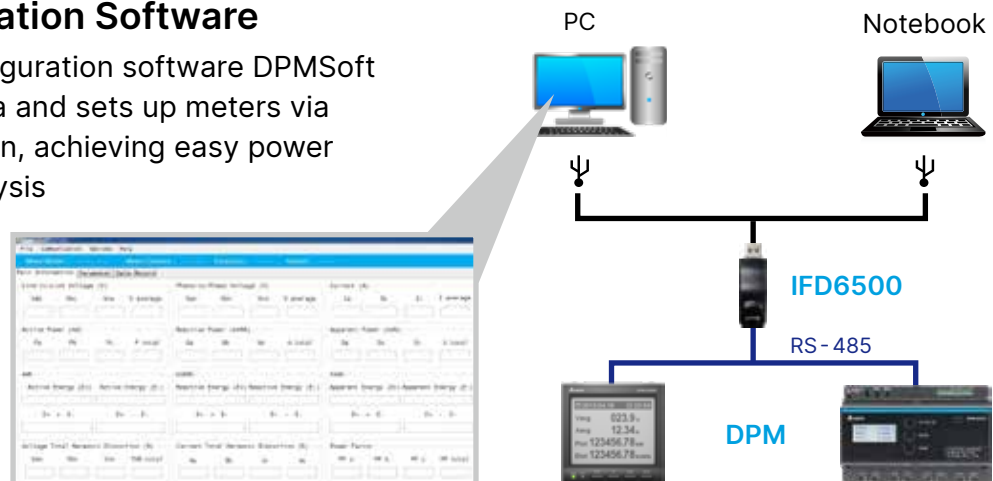

User-defined Parameter Groups

- Allows user-defined Modbus addresses to multiple corresponding parameters for the host computer to acquire data at one time and enhance efficiency

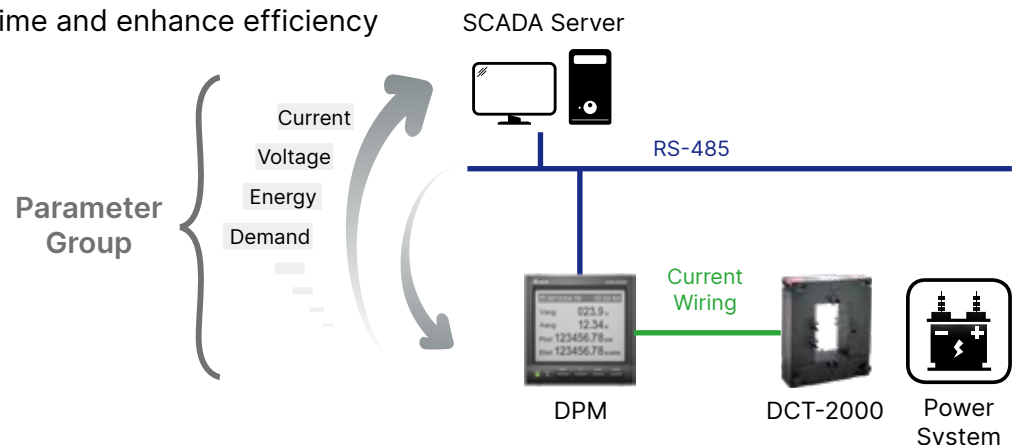

Panel Mount Type

DPM-C Series

- Suitable for applications in general power systems
- Large LCD displays power data in real time
- A variety of communication protocols for easy integration
- Various power monitoring functions for different applications

Applications

Distribution board | Electrical room |
Factory/Building energy management system



Features

Multi-Language Display

- Large dot matrix LCD (198x168 dots), high font recognition
- Multi-language display: English (capital and lowercase letters), Chinese, Japanese and other languages



DPM-C530: dot matrix LCD for high recognition display, better than segment LCD display

Ptot 123456.78 kW
Etot 123456.78 kVARh




Event Alarms and History Logs

- Keeps max. 2 months of electricity measurement values for analysis;
up to 17 power parameters selectable for recordings of different time intervals
(e.g. recording 17 electricity parameters every 5 minutes for up to 2 months);
29 types of built-in alarms and up to 500 alarms recording

Interval	0 ~ 59 secs.	1 ~ 5 mins.	5 ~ 60 mins.
Capacity			
Max. Data Types	6	17	17
Max. Storage Time (Days)	7	31	62


Auto-Recording

- Automatic calculation of monthly energy consumption
- Allows users to setup specific dates for monthly calculation

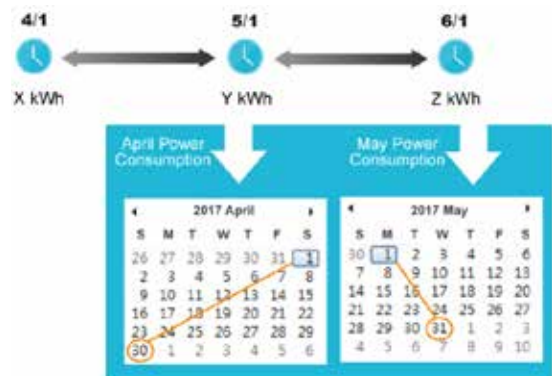

Multi-Tariff

- Automatic measurement & calculation of power consumption during a specific time period
- Multiple interval groups setting to measure power consumption at different periods of time

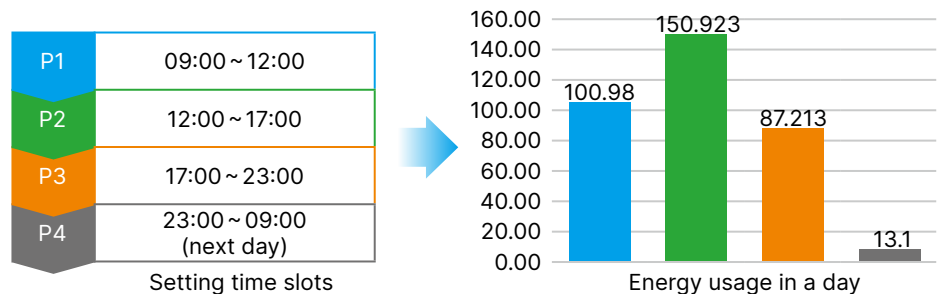

Ethernet Communication

- Dual Ethernet protocols support Modbus TCP
- Easy serial connection without gateway, no need to occupy communication ports
- Basic settings and data viewing on web page



Input / Output Capability

Achieves easier system integration with functions such as anomaly alarms, and connected devices' monitoring & control.



Digital input

External condition monitoring / input metering / setting adjustment



Digital output

Alarms / pulse (kWh only) calculation



Relay

Alarms / external devices activation

Complies with MID (DPM-C530EM / DPM-C532M)

With MID compliance (EN 50470-1/3, Annex B and Annex D, Class C) ensures equal accuracy with a billing meter, and is tailored for billing-related applications in Europe.



DPM-C Series Information

Model	DPM-C530	DPM-C530E	DPM-C532	DPM-C520
Product Appearance				
Front Panel Dimensions	96 x 96 mm	96 x 96 mm	96 x 96 mm	96 x 96 mm
Accuracy Class				
Active Energy	IEC 62053-22 Class 0.5S	EC 62053-22 Class 0.5	IEC 62053-22 Class 0.5S	0.5%
MID ready compliance, EN50470-1/3, Annex B & Annex D Class C		DPM-C530EM	DPM-C532M	
Instantaneous Measurement				
Current	●	●	●	●
Voltage	●	●	●	●
Frequency	●	●	●	●
Active, Reactive and Apparent Power	●	●	●	●
Power Factor	●	●	●	●
Active, Reactive and Apparent Energy	●	●	●	●
Demand Value				
Current	●	●	●	
Power	●	●	●	
Calculation Mode	Fixed Block	Sliding / Fixed Block	Sliding / Fixed Block	
Power Quality Analysis				
Current / Voltage Unbalance	●	●	●	●
Total Harmonic Distortion (Current / Voltage)	●	●	●	●
Individual Current / Voltage Harmonics	31 st	31 st	31 st	
Advanced Function				
Max. / Min. Instantaneous Values with Timestamp	●	●	●	●
Alarm Function	●	●	●	●
Alarm Condition	29	29	29	10
Alarm History	●	●	●	
Data Logs	●	●	●	
User-define Modbus Address	35	35	35	5
Monthly Energy Usage	●	●	●	
Multi-Tariff (Section number)	8	8	8	
Multi-Language UI	Chinese / English / Japanese			
I/O				
Digital Input			4	
Digital Output			2	
Communication				
RS-485	●		●	●
Ethernet		● (2 ports)		
Modbus	RTU / ASCII	TCP	RTU / ASCII	RTU
BACnet MS/TP	●		●	
Serial to Ethernet Gateway		●		

Model	DPM-C510	DPM-C510E	DPM-C501L	DPM-C502
Product Appearance				
Front Panel Dimensions	96 x 96 mm	96 x 96 mm	96 x 96 mm	96 x 96 mm
Accuracy Class				
Active Energy	IEC 62053-22 Class 0.5S	IEC 62053-22 Class 0.5S	0.5%	0.5%
Instantaneous Measurement				
Current	●	●	●	●
Voltage	●	●	●	●
Frequency	●	●	●	●
Active, Reactive and Apparent Power	●	●	●	●
Power Factor	●	●	●	●
Active, Reactive and Apparent Energy	●	●	●	●
Demand Value				
Current				
Power				●
Calculation Mode				Sliding Block
Power Quality Analysis				
Current / Voltage Unbalance			●	●
Total Harmonic Distortion (Current / Voltage)			●	●
Individual Current / Voltage Harmonics				31 st
Advanced Function				
Max. / Min. Instantaneous Values with Timestamp			●	●
Alarm Function			●	●
Alarm Condition			10	10
Data Logs				●
User-define Modbus Address			5	5
Multi-Tariff (Section number)				4
I/O				
Digital Input			4	4
Relay			2	2
Communication				
RS-485	●		●	●
Ethernet		●		
Modbus	RTU	TCP	RTU	RTU

Technical Specifications


Model	DPM-C530		DPM-C530E	DPM-C532
Measurement Accuracy				
Current	± 0.5%			
Voltage	± 0.5%			
Active Energy	IEC 62053-22 Class 0.5S			
Reactive Energy	± 1%			
Apparent Energy	± 2%			
Active Power	± 0.5%			
Reactive Power	± 1%			
Apparent Power	± 2%			
Power Factor	± 0.5%			
Frequency	± 0.5%			
MID Directive EN50470-1, EN50470-3	Annex B and Annex D Class C in DPM-C530EM		Annex B and Annex D Class C in DPM-C532M	
Input Characteristics				
Measuring System Type	1P2W, 1P3W, 3P3W, 3P4W			
Voltage	35 ~ 690 V _{AC} (L-L); 20 ~ 400 V _{AC} (L-N)			
Current	1A/5A			
Frequency	45 ~ 70Hz			
Control Power	AC: 100 ~ 240 V (Max. Power Consumption 4.6W); DC: 100 ~ 300 V			
Digital Input				
ON Voltage			11 ~ 40 V _{DC}	
OFF Voltage			0 ~ 4 V _{DC}	
Input Current			≤ 8 mA	
Input Resistance			3 kΩ	
Maximum Frequency			20 Hz	
Isolation			5 kV rms	
Digital Output				
Max Load Voltage			40 V _{DC}	
Max Load Current			20 mA	
On Resistance			50 Ω max	
Frequency for Digital Output			20 Hz max	
Pulse width for Digital Output			50% duty cycle	
Isolation			5 kV rms	
Data Record				
Max. / Min Log	●	●	●	
Alarm Status & Timestamp	●	●	●	
Alarm Counting	●	●	●	
Alarm History Record	500	500	500	
Data Logging	Up to 17 parameters with configurable interval & duration (e.g. 17 parameters for 30 days at 1 minute interval)			
Customizable Data Logs	●	●	●	
Commnication				
Protocol (Interface)	Modbus RTU / ASCII (RS-485) BACnet MS/TP (RS-485)		Modbus TCP (Ethernet)	Modbus RTU / ASCII (RS-485) BACnet MS/TP (RS-485)
Mechanical Characteristics				
IP Protection - Front display	IP52			
IP Protection - Meter body	IP20			
Dimensions (W x H x D, mm)	96 x 96 x 95.4	DPM-C530E: 96 x 96 x 127.5 DPM-C530EM: 96 x 96 x 130.9		DPM-C532: 96 x 96 x 127.5 DPM-C532M: 96 x 96 x 130.9
Weight (g)	400	450		450
Environmental Characteristics				
Operating Temperature	-20 ~ +60°C	-20 ~ +50°C		
Storage Temperature	-30 ~ +70°C	-30 ~ +60°C		
Relative Humidity	~ 95% RH			
Altitude	Below 2,000 meters			
Electromagnetic Compatibility				
Electrostatic Discharge	IEC 61000-4-2			
Immunity to Radiated Fields	IEC 61000-4-3			
Immunity to Fast Transients	IEC 61000-4-4			
Immunity to Impulse Waves	IEC 61000-4-5			
Conducted Immunity	IEC 61000-4-6			
Immunity to Magnetic Fields	IEC 61000-4-8			
Immunity to Voltage Dips	IEC 61000-4-11			
Radiated Emissions	FCC Part 15 EN 55011 Class A			
Conducted Emissions	FCC Part 15 EN 55011 Class A			
Harmonics Emissions	IEC 61000-3-2			
Flicker Emissions	IEC 61000-3-3			
Certification				
Safety	UL / CE / RCM		UL / CE	
Accuracy	IEC 62053-22 / CMA / EN50470-3 (DPM-C530EM / C532M)			

Model	DPM-C520	DPM-C510	DPM-C510E
Measurement Accuracy			
Current	± 0.5%	± 0.5%	
Voltage	± 0.5%	± 0.5%	
Active Energy	± 0.5%	IEC 62053-22 Class 0.5S	
Reactive Energy	± 1%	± 2%	
Apparent Energy	± 2%	± 2%	
Active Power	± 0.5%	± 0.5%	
Reactive Power	± 1%	± 2%	
Apparent Power	± 2%	± 2%	
Power Factor	± 0.5%	± 0.5%	
Frequency	± 0.5%	± 1%	
Input Characteristics			
Measuring System Type	1P2W, 1P3W, 3P3W, 3P4W		
Voltage	35 ~ 690 V _{AC} (L-L) 20 ~ 400 V _{AC} (L-N)	80 ~ 690 V _{AC} (L-L) 50 ~ 400 V _{AC} (L-N)	
Current	1A / 5A		
Frequency	45 ~ 70 Hz	50/60 Hz	
Control Power	AC: 100 ~ 240 V (Max. Power Consumption 4.6 W) DC: 100 ~ 300 V		
Data Record			
Max. / Min Log	●		
Alarm Status & Timestamp	●		
Alarm Counting	●		
Communication			
Protocol (Interface)	Modbus TRU (RS-485)	Modbus TRU (RS-485)	Modbus TCP (Ethernet)
Mechanical Characteristics			
IP Protection - Front display	IP52		
IP Protection - Meter body	IP20		
Dimensions (W x H x D, mm)	96 x 96 x 95.4	96 x 96 x 98.1	
Weight (g)	400	350	
Environmental Characteristics			
Operating Temperature	-20 ~ +60°C		
Storage Temperature	-30 ~ +70°C		
Relative Humidity	~ 95% RH		
Altitude	Below 2,000 meters		
Electromagnetic Compatibility			
Electrostatic Discharge	IEC 61000-4-2		
Immunity to Radiated Fields	IEC 61000-4-3		
Immunity to Fast Transients	IEC 61000-4-4		
Immunity to Impulse Waves	IEC 61000-4-5		
Conducted Immunity	IEC 61000-4-6		
Immunity to Magnetic Fields	IEC 61000-4-8		
Immunity to Voltage Dips	IEC 61000-4-11		
Radiated Emissions	FCC Part 15 EN 55011 Class A		
Conducted Emissions	FCC Part 15 EN 55011 Class A		
Harmonics Emissions	IEC 61000-3-2		
Flicker Emissions	IEC 61000-3-3		
Certification			
Safety	UL / CE		
Accuracy	CMA	IEC 62053-22	


Model	DPM-C501L		DPM-C502	
Measurement Accuracy				
Current			± 0.5%	
Voltage			± 0.5%	
Active Energy			± 0.5%	
Reactive Energy			± 1%	
Apparent Energy			± 2%	
Active Power			± 0.5%	
Reactive Power			± 1%	
Apparent Power			± 2%	
Power Factor			± 0.5%	
Frequency			± 0.5%	
Input Characteristics				
Measuring System Type	1P2W, 1P3W, 3P3W, 3P4W			
Voltage	35 ~ 690 V _{AC} (L-L) 20 ~ 400 V _{AC} (L-N)			
Current	1A/5A			
Frequency	45 ~ 70Hz			
Control Power	AC: 100 ~ 240 V (Max. Power Consumption 4.6W) DC: 100 ~ 300 V			
Digital Input				
ON Voltage	With build-in power			
OFF Voltage				
Input Current	≤ 5mA			
Input Resistance	3kΩ			
Maximum Frequency	20Hz			
Isolation	2.5kV rms			
Relay				
Max Output Frequency	20Hz			
Switching Current	240 V _{AC} at 2 Amps, resistive 24 V _{AC} at 2 Amps, resistive			
Isolation	2.5kV rms			
Data Record				
Max. / Min Log	●		●	
Alarm Status & Timestamp	●		●	
Alarm Counting	●		●	
Data Logging			Fixed 4 parameters with configurable interval & duration (e.g. 4 parameters for 7 days at 1 minute interval)	
Customizable Data Logs	●		●	
Communication				
Protocol (Interface)	Modbus RTU (RS-485)			
Mechanical Characteristics				
IP Protection - Front display	IP52			
IP Protection - Meter body	IP20			
Dimensions (W x H x D, mm)	96 x 96 x 95.4			
Weight (g)	400			
Environmental Characteristics				
Operating Temperature	-20 ~ +50°C			
Storage Temperature	-30 ~ +60°C			
Relative Humidity	~ 95% RH			
Altitude	Below 2,000 meters			
Electromagnetic Compatibility				
Electrostatic Discharge	IEC 61000-4-2			
Immunity to Radiated Fields	IEC 61000-4-3			
Immunity to Fast Transients	IEC 61000-4-4			
Immunity to Impulse Waves	IEC 61000-4-5			
Conducted Immunity	IEC 61000-4-6			
Immunity to Magnetic Fields	IEC 61000-4-8			
Immunity to Voltage Dips	IEC 61000-4-11			
Radiated Emissions	FCC Part 15 EN 55011 Class A			
Conducted Emissions	FCC Part 15 EN 55011 Class A			
Harmonics Emissions	IEC 61000-3-2			
Flicker Emissions	IEC 61000-3-3			
Certification				
Accuracy	CMA			

Dimensions


DPM-C530
DPM-C520

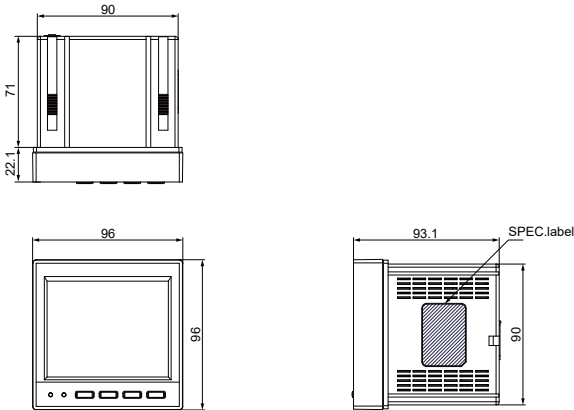


DPM-C530E

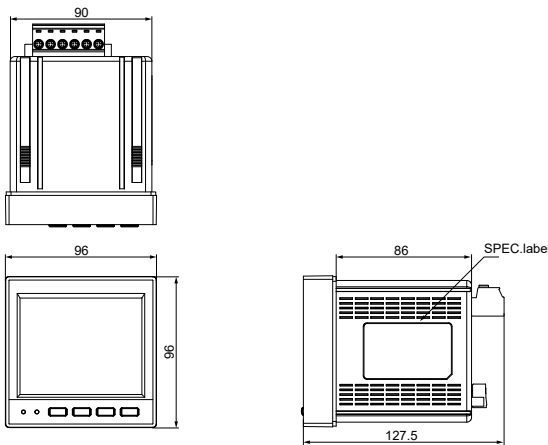


DPM-C530EM

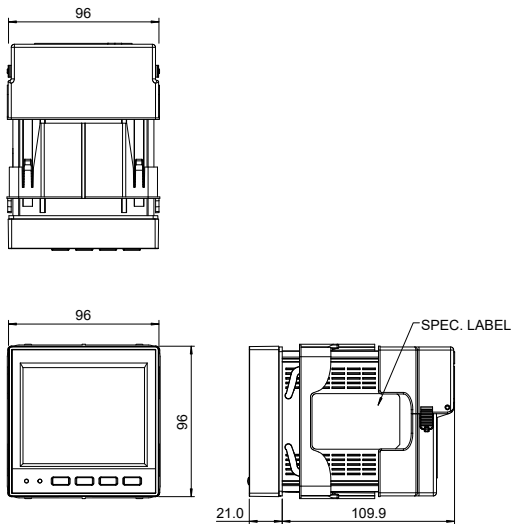




DPM-C532

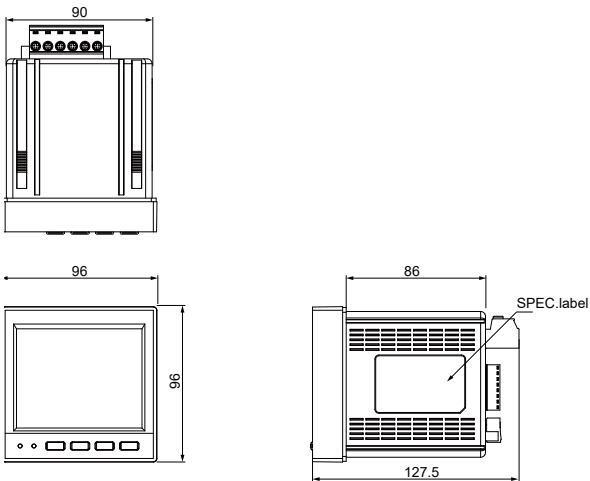




DPM-C532M

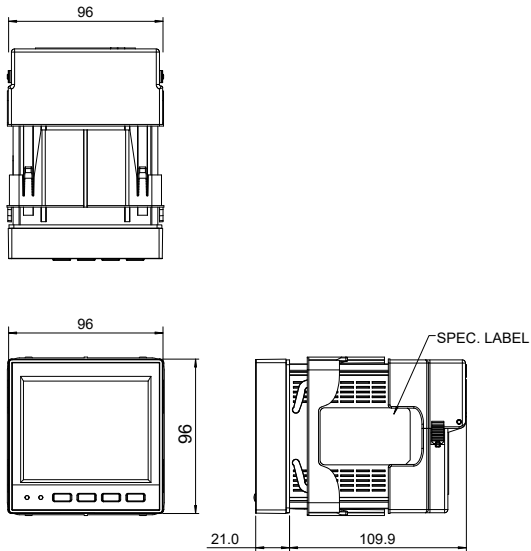

DPM-C510
DPM-C510E



DPM-C501L
DPM-C502



DIN Rail Mount Type

DPM-D Series

- Easy installation and integration for various equipment
- Applicable to general energy management systems
- Multiple energy measurement functions for different applications

Applications


High power consuming equipment |
Electrical equipment cabinet | Enclosure



Features

Multi-Tariff

- Automatic measurement & calculation of power consumption during a specific time period
- Multiple interval groups setting to measure power consumption at different periods of time

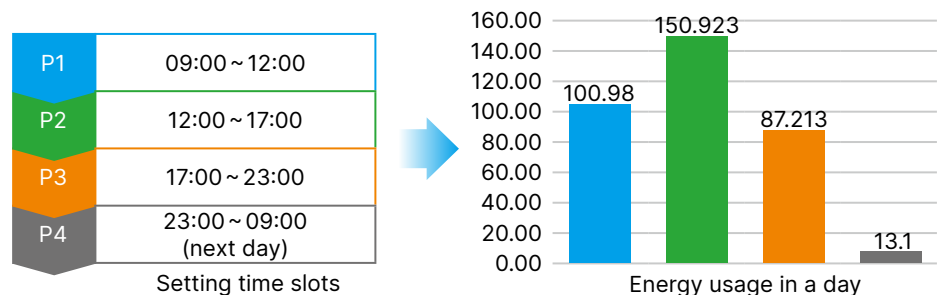

Input / Output Capability

Achieves easier system integration with functions such as anomaly alarms, and connected devices' monitoring & control.



Digital input

External condition monitoring / input metering / setting adjustment



Digital output

Alarms / pulse (kWh only) calculation

Data Recording (Recording conditions depend on models)

- User-defined time intervals for recording (Units: day / hour / min. / sec.)
- Max. 50 parameters recording
- Max. 16 alarm conditions and max. 16 alarms recording


Recorded items vs. Record duration
(at 1 minute intervals)

Parameter(s)	Recording Days
1	90
7	30
20	12


Demand Calculation

- Defines time intervals (default: 15 mins.)
- Demand calculation methods: Sliding block / fixed block
- Calculates the max. demand value / time in each tariff period

Sliding Block

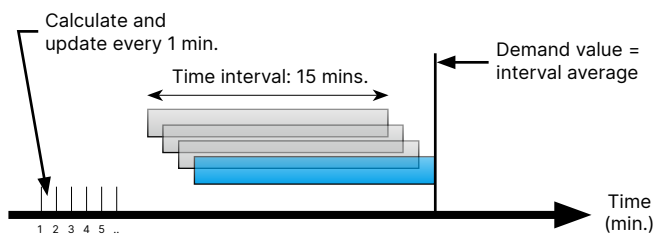

Fixed Block

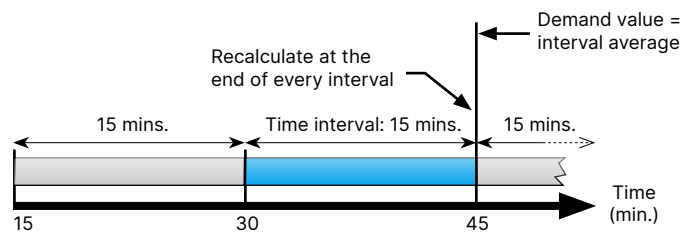


Automatic Wiring Correction (DPM-DA530)

- Automatic wiring correction via algorithm to save manpower for on-site re-wiring
- Fixes phase wiring errors and adjusts power flow direction

* Refer to product manual for function restrictions

Operation Process

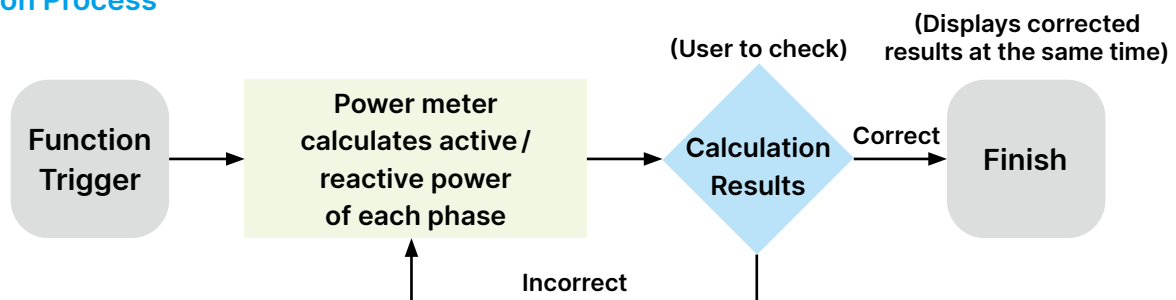

DPM-D Series Information

Model	DPM-D532I	DPM-D533I	DPM-D520I
Product Appearance			
Accuracy Class			
Active Energy	IEC 62053-22 Class 0.5S	IEC 62053-22 Class 0.5S	0.5%
Instantaneous Measurement			
Current	●	●	●
Voltage	●	●	●
Frequency	●	●	●
Active, Reactive and Apparent Power	●	●	●
Power Factor	●	●	●
Active, Reactive and Apparent Energy	●	●	●
Current Measurement			
Direct Measurement (Current Range)	63 A	63 A	63 A
Demand Value			
Current	●	●	●
Power	●	●	●
Calculation Mode	Sliding / Fixed Block	Sliding / Fixed Block	Fixed Block
Power Quality Analysis			
Current / Voltage Unbalance	●	●	●
Total Harmonic Distortion (Current / Voltage)	●	●	●
Individual Current / Voltage Harmonics	31 st	31 st	31 st
Advanced Function			
Max. / Min. Instantaneous Values with Timestamp	●	●	●
Alarm Function	●	●	●
Alarm Condition	29	29	29
Alarm History	●	●	●
Data Logs	●	●	●
User-Defined Modbus Address	35	35	35
Monthly Energy Usage	●	●	●
Multi-Tariff (Section Number)	8	8	8
I/O			
Digital Input	2	2	
Digital Output	2	2	
Communication			
RS-485	●	●	●
Modbus	RTU / ASCII	RTU / ASCII	RTU / ASCII

Model	DPM-DA530	DPM-DA510
Product Appearance		
Accuracy Class		
Active Energy	0.5%	0.5%
Instantaneous Measurement		
Current	●	●
Voltage	●	●
Frequency	●	●
Active, Reactive and Apparent Power	●	●
Power Factor	●	●
Active, Reactive and Apparent Energy	●	●
Current Measurement		
Via External CT (Current Range)	1A/5A	1A/5A
Demand Value		
Current	●	
Power	●	
Calculation Mode	Sliding / Fixed Block	
Power Quality Analysis		
Current / Voltage Unbalance	●	
Total Harmonic Distortion (Current / Voltage)	●	
Advanced Function		
Max. / Min. Instantaneous Values with Timestamp	●	
Alarm Function	●	
Alarm Condition	16	
Alarm Logs	●	
Data Logs	●	
User-Defined Modbus Address	20	
Multi-Tariff (Section number)	8	
Auto Wiring Correction	●	
CO ₂ Emission	●	
I/O		
Digital Output	1 (kWH only)	1 (kWH only)
Communication		
RS-485	●	●
Modbus	RTU	RTU


Technical Specifications

Model	DPM-D532I	DPM-D533I	DPM-D520I
Measurement Accuracy			
Current	± 0.5%		
Voltage	± 0.5%		
Active Energy	IEC 62053-22 Class 0.5S		± 0.5%
Reactive Energy	± 1%		
Apparent Energy	± 2%		
Active Power	± 0.5%		
Reactive Power	± 1%		
Apparent Power	± 2%		
Power Factor	± 0.5%		
Frequency	± 0.5%		
Input Characteristics			
Measuring System Type	1P2W, 1P3W, 3P3W, 3P4W		
Voltage	138 ~ 480 V (L-L) 80 ~ 277 V (L-N)	35 ~ 690 V _{AC} (L-L) 20 ~ 400 V _{AC} (L-N)	35 ~ 690 V _{AC} (L-L) 20 ~ 400 V _{AC} (L-N)
Current	63 A		
Frequency	45 ~ 70 Hz		
Control Power	N/A (Integrated in voltage input, Max.Power Consumption 4.6 W)	DC: 12 ~ 60 V (Max.Power Consumption 4.6 W)	AC: 80 ~ 265 V (Max.Power Consumption 4.6 W) DC: 100 ~ 300 V
Digital Input			
ON Voltage	11 ~ 40 V _{DC}		
OFF Voltage	0 ~ 4 V _{DC}		
Input Current	≤ 8 mA		
Input Resistance	3 kΩ		
Maximum Frequency	20 Hz		
Isolation	5 kV rms		
Digital Output			
Max Load Voltage	40 V _{DC}		
Max Load Current	20 mA		
On Resistance	50 Ω max		
Frequency for Digital Output	20 Hz max		
Pulse width for Digital Output	50% duty cycle		
Isolation	5 kV rms		
Data Record			
Max. / Min Log	●	●	●
Alarm Status & Timestamp	●	●	●
Alarm Counting	●	●	●
Alarm History Record	500	500	500
Data Logging	Up to 17 parameters with configurable interval & duration (e.g. 17 parameters for 30 days at 1 minute interval)		
Customizable Data Logs	●	●	●
Communication			
Protocol (Interface)	Modbus RTU / ASCII (RS-485)		
Mechanical Characteristics			
IP Protection - Meter body	IP20		
Dimensions (W x H x D, mm)	135 x 90 x 65.8		126 x 90 x 67.4
Weight (g)	600		
Environmental Characteristics			
Operating Temperature	-30 ~ +70 °C		0 ~ +70 °C
Storage Temperature	-40 ~ +80 °C		-10 ~ +80 °C
Relative Humidity	~ 95% RH		
Altitude	Below 2,000 meters		
Electromagnetic Compatibility			
Electrostatic Discharge	IEC 61000-4-2		
Immunity to Radiated Fields	IEC 61000-4-3		
Immunity to Fast Transients	IEC 61000-4-4		
Immunity to Impulse Waves	IEC 61000-4-5		
Conducted Immunity	IEC 61000-4-6		
Immunity to Magnetic Fields	IEC 61000-4-8		
Immunity to Voltage Dips	IEC 61000-4-11		
Radiated Emissions	FCC Part 15 EN 55011 Class A		
Conducted Emissions	FCC Part 15 EN 55011 Class A		
Harmonics Emissions	IEC 61000-3-2		
Flicker Emissions	IEC 61000-3-3		
Certification			
Safety	UL / CE		CE / RCM
Accuracy	IEC 62053-22		CMA


Model	DPM-DA530		DPM-DA510
Measurement Accuracy			
Current			± 0.5%
Voltage			± 0.5%
Active Energy			± 0.5%
Reactive Energy			± 2%
Apparent Energy			± 2%
Active Power			± 0.5%
Reactive Power			± 2%
Apparent Power			± 2%
Power Factor			± 0.5%
Frequency			± 0.5%
Input Characteristics			
Measuring System Type	1P2W, 1P3W, 3P3W, 3P4W		
Voltage	35 ~ 600 V _{AC} (L-L) 20 ~ 350 V _{AC} (L-N)		
Current	1A/5A		
Frequency	45 ~ 65Hz		
Control Power	AC: 100 ~ 240 V (Max.Power Consumption 3 W) DC: 100 ~ 250 V		
Digital Output			
Max Load Voltage	40 V _{DC}		
Max Load Current	50 mA		
On Resistance	N/A		
Frequency for Digital Output	1kHz max		
Pulse width for Digital Output	50% duty cycle		
Isolation	2.5kV rms		
Data Record			
Max. / Min Log	●		
Alarm Status & Timestamp	●		
Alarm Counting	●		
Alarm History Record	16		
Data Logging	Up to 50 parameters with configurable interval & duration (e.g. 7 parameters for 30 days at 1 minute interval)		
Customizable Data Logs	●		
Commnication			
Protocol (Interface)	Modbus RTU (RS-485)		
Mechanical Characteristics			
IP Protection - Meter body	IP20		
Dimensions (W x H x D, mm)	72 x 87.5 x 58.7		
Weight (g)	195		
Environmental Characteristics			
Operating Temperature	0~ +60℃		
Storage Temperature	-10~ +70℃		
Relative Humidty	~ 95% RH		
Altitude	Below 2,000 meters		
Electromagnetic Compatibility			
Electrostatic Discharge	IEC 61000-4-2		
Immunity to Radiated Fields	IEC 61000-4-3		
Immunity to Fast Transients	IEC 61000-4-4		
Immunity to Impulse Waves	IEC 61000-4-5		
Conducted Immunity	IEC 61000-4-6		
Immunity to Magnetic Fields	IEC 61000-4-8		
Immunity to Voltage Dips	IEC 61000-4-11		
Radiated Emissions	FCC Part 15 EN 55011 Class A		
Conducted Emissions	FCC Part 15 EN 55011 Class A		
Harmonics Emissions	IEC 61000-3-2		
Flicker Emissions	IEC 61000-3-3		
Certification			
Safety	CE		

Dimensions




DPM-DA530
DPM-DA510

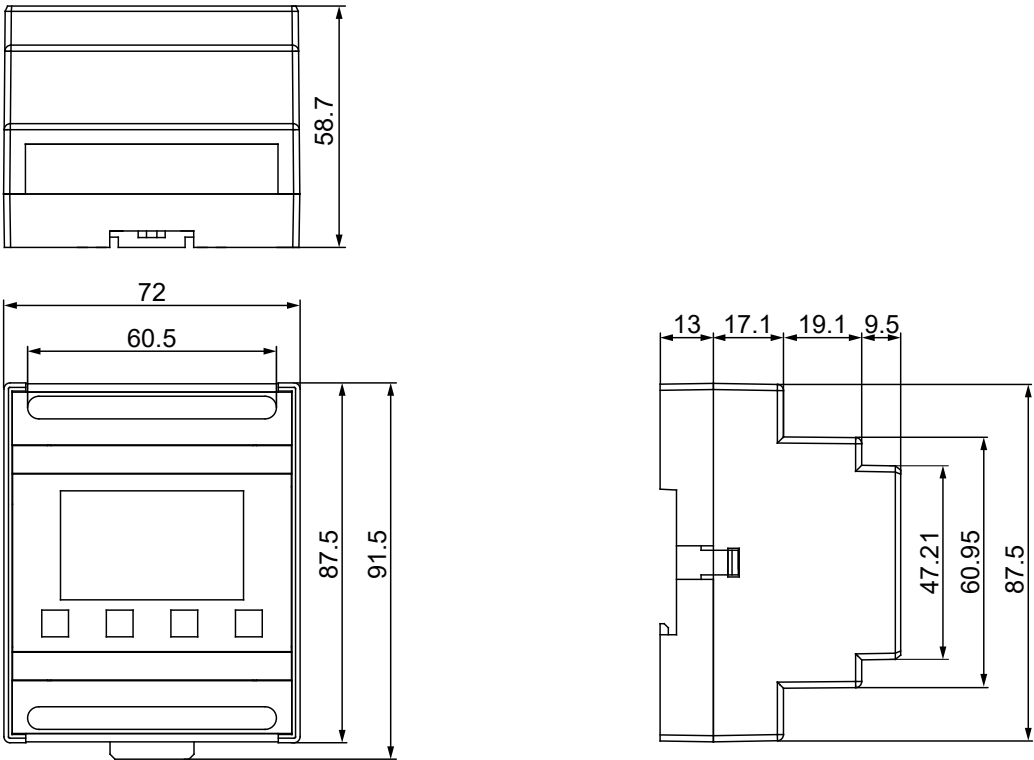



DPM-D532I

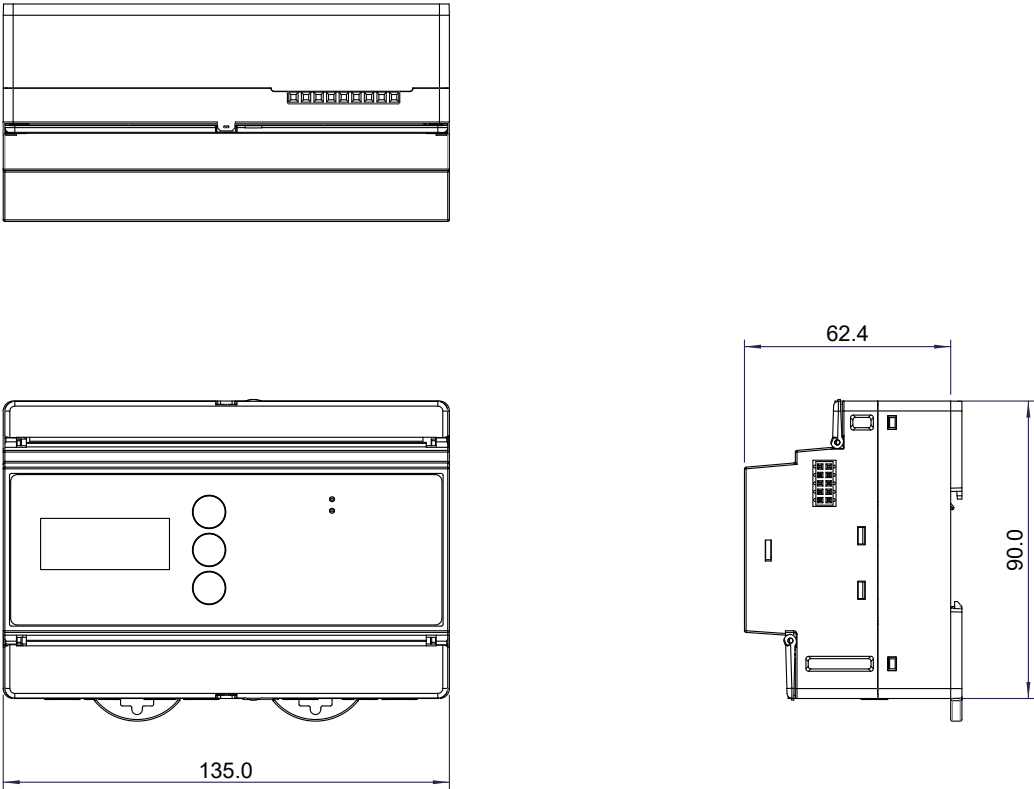

DPM-D533I

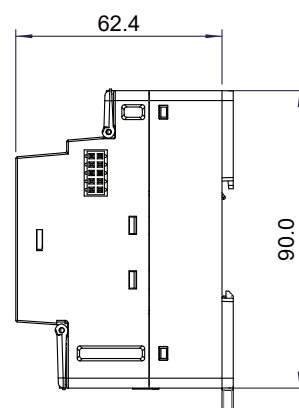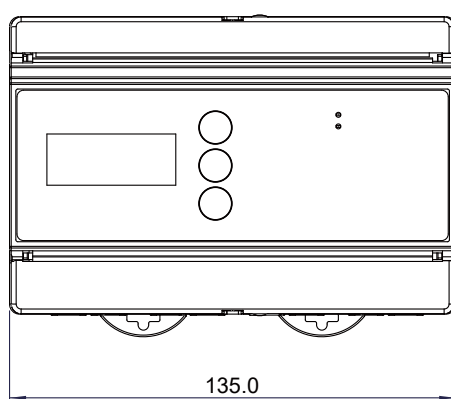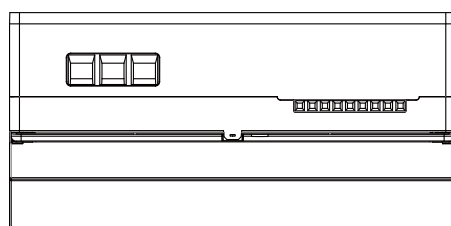

DPM-D520I

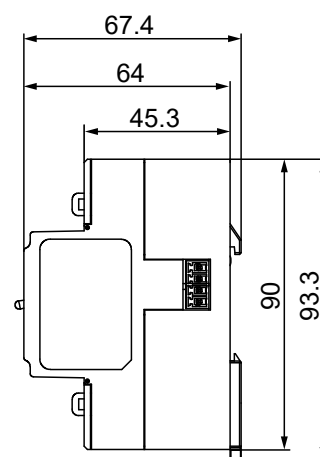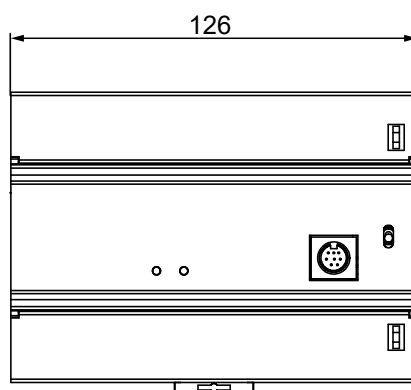

Multi-loop Type

DPM-M Series

- Multiple and selective circuit monitoring reduces the use of power meters in large-scale areas
- Suitable for applications with lots of power circuits to save cost
- AC/DC measurement

Applications

Shopping mall | Dormitory | Telecommunication System




Features

Scalable Multi-Loop Configuration (DPM-MA3222)

- Dual main circuits with isolation for connection to different power systems
- Each main circuit connects 4 subcircuits; configures a total of 8 circuits (three-phase) or 24 circuits (single-phase)
- Subcircuit can be set to three-phase, single-phase, or three-phase & single-phase modes

Multi-loop
AC Power Meter
DPM-MA3222

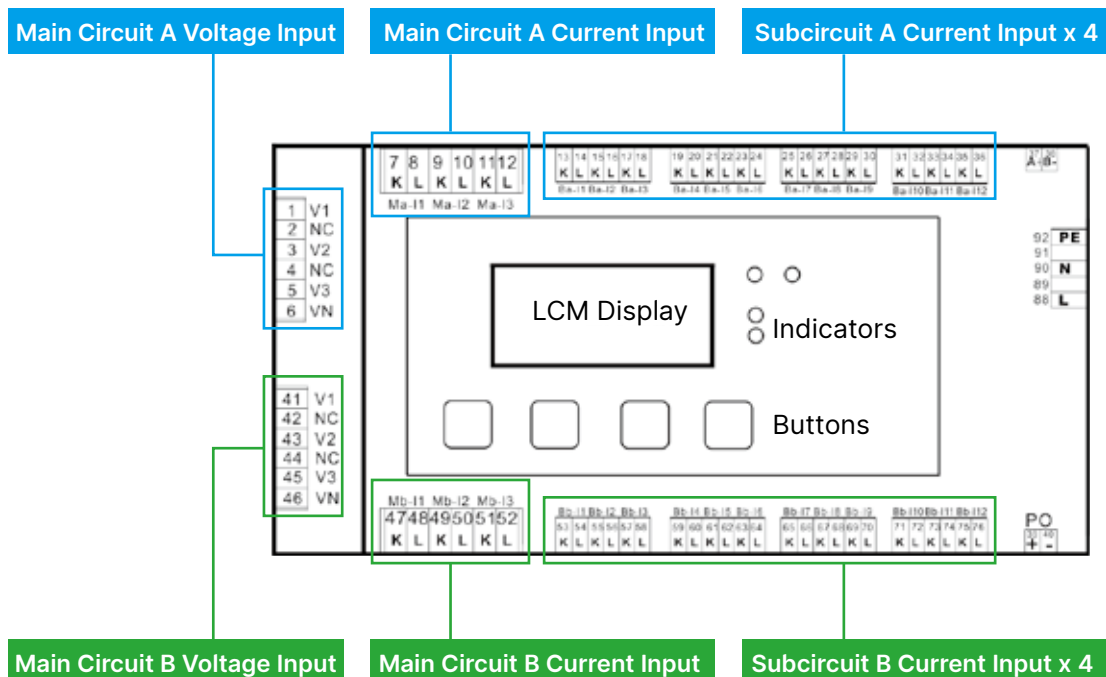

I/O Configuration (DPM-MA3222)


- Various I/O types for control and integration with peripheral devices



I/O Type	Qty.	Functions
Relay Output (RO)	4	5 A/250 V_{AC}, 5 A/30 V_{DC} - Alarm linkage: Hi/Lo/Hi hold/Lo hold
Digital Input (DI)	2	- Demand calculation trigger/stop - Record clearing: demand, max. demand, energy, max./min. value - Relay homing
Pulse Output (PO)	1	30 V_{DC}, 30 mA - Active/Reactive power output of any circuit

Multi-Loop DC Measurement (DPM-MA1121)

- Supports max. 5 DC circuits
- Suitable for telecommunication, green energy, energy storage applications
- Dedicated power supply for Hall sensor (optional)

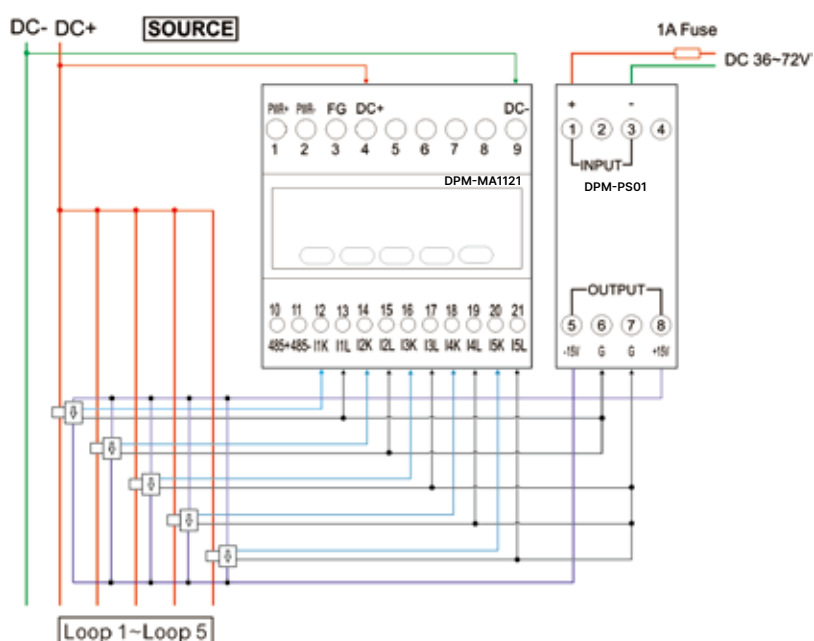

**Multi-loop
DC Power Meter
DPM-MA1121**



**Hall Current Transformer
(CT) Power Supply
DPM-PS01**



- Input voltage: 36 ~ 72 V_{DC}
- Output voltage: ±15V_{DC}
- Output current: ±100 mA

DPM-M Series Information




Model	DPM-MA3222	DPM-MA1121
Product Appearance		
Accuracy Class		
Active Energy	0.5%	0.5%
Loop Number		
3-Phase Measurement	8	
Single-Phase Measurement	24	5
Instantaneous Measurement		
Current	●	●
Voltage	●	●
Frequency	●	
Active Power	●	●
Reactive and Apparent Power	●	
Power Factor	●	
Active Energy	●	●
Reactive and Apparent Energy	●	
Demand Value		
Current	●	
Power	●	
Calculation Mode	Sliding / Fixed Block	
Power Quality Analysis		
Current / Voltage Unbalance	●	
Total Harmonic Distortion (Current / Voltage)	●	
Individual Current / Voltage Harmonics	31 st	
Advanced Function		
Max. / Min. Instantaneous Values with Timestamp	●	
Alarm Function	●	
Alarm Condition	48	
Data Logs	●	●
User-Defined Modbus Address	80	20
I/O		
Digital Input	2	
Relay	4	
Pulse Output	1	
Communication		
RS-485	●	●
Modbus	RTU	RTU

Technical Specifications




Model	DPM-MA3222	DPM-MA1121
Measurement Accuracy		
Current	± 0.5%	± 0.5%
Voltage	± 0.5%	± 0.5%
Active Energy	± 0.5%	± 0.5%
Reactive Energy	± 2%	N/A
Apparent Energy	± 2%	N/A
Active Power	± 0.5%	± 0.5%
Reactive Power	± 2%	N/A
Apparent Power	± 2%	N/A
Power Factor	± 0.5%	N/A
Frequency	± 0.5%	N/A
Input Characteristics		
Measuring System Type	1P2W, 1P3W, 3P3W, 3P4W	1P2W
Voltage	35 ~ 600 V _{AC} (L-L) 20 ~ 400 V _{AC} (L-N)	≤100 V _{DC}
Current	Main: 5 A Subcircuit: 333 mV	± 4 V _{DC} (Hall CT)
Frequency	45 ~ 65 Hz	
Control Power	AC: 100 ~ 240 V (Max. Power Consumption 15 W) DC: 100 ~ 250 V	DC: 20 ~ 56 V (Max. Power Consumption 4 W)
Digital Input		
On Voltage	0 ~ 1 V _{DC}	
Off Voltage	10 ~ 12 V _{DC}	
Input Current	≤ 3.5 mA	
Input Resistance	1M Ω	
Maximum Frequency	50 Hz	
Isolation	3.5 kV rms	
Relay		
Max Output Frequency	10 Hz	
Switching Current	250 V _{AC} at 5.0 Amps, resistive 30 V _{DC} at 5.0 Amps, resistive	
Isolation	2.5 kV rms	
Pulse Output		
Max Load Voltage	30 V _{DC}	
Max Load Current	30 mA	
Frequency for Digital Output	40 Hz max	
Pulse width for Digital Output	50% duty cycle	
Isolation	2.5 kV rms	
Data Record		
Max. / Min. Log	●	●
Data Logging	Up to 86 parameters with configurable interval & duration (e.g. 40 parameters for 7 days at 1 minute interval)	Up to 21 parameters with configurable interval & duration (e.g. 20 parameters for 6 days at 1 minute interval)
Customizable Data Logs	●	●
Communication		
Protocol (Interface)	Modbus RTU (RS-485)	Modbus RTU (RS-485)
Mechanical Characteristics		
IP Rating - Meter Body	IP20	
Dimensions (W x H x D, mm)	199 x 118 x 77	54 x 81 x 65.5
Weight (g)	750	185
Environmental Characteristics		
Operating Temperature	0 ~ +60°C	
Storage Temperature	-10 ~ +70°C	
Relative Humidity	~ 95% RH	
Altitude	Below 2,000 meters	
Electromagnetic Compatibility		
Electrostatic Discharge	IEC 61000-4-2	
Immunity to Radiated Fields	IEC 61000-4-3	
Immunity to Fast Transients	IEC 61000-4-4	
Immunity to Impulse Waves	IEC 61000-4-5	
Conducted Immunity	IEC 61000-4-6	
Immunity to Magnetic Fields	IEC 61000-4-8	
Immunity to Voltage Dips	IEC 61000-4-11	
Radiated Emissions	FCC Part 15, EN 55011 Class A	
Conducted Emissions	FCC Part 15, EN 55011 Class A	
Harmonics Emissions	IEC 61000-3-2	
Flicker Emissions	IEC 61000-3-3	
Certification		
Safetv	CE	

Dimensions

DPM-MA3222

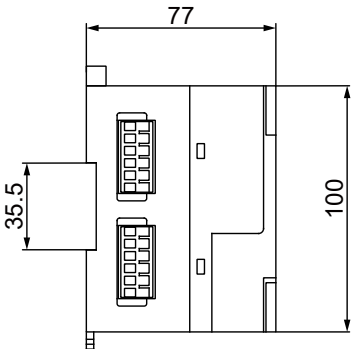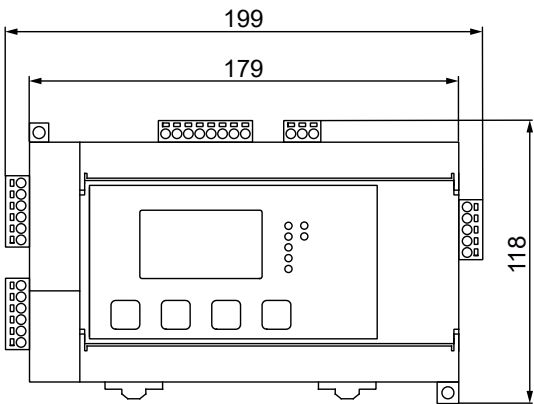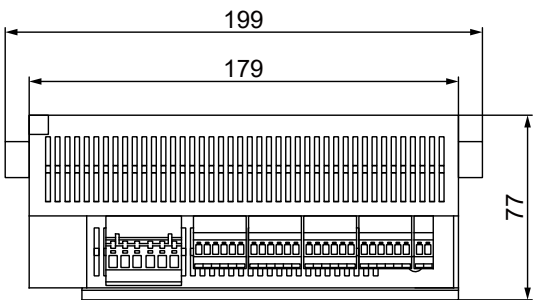

DPM-MA1121

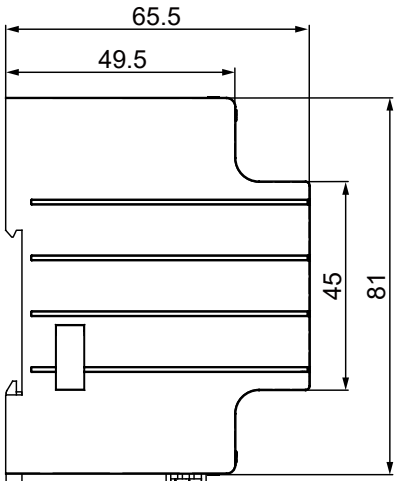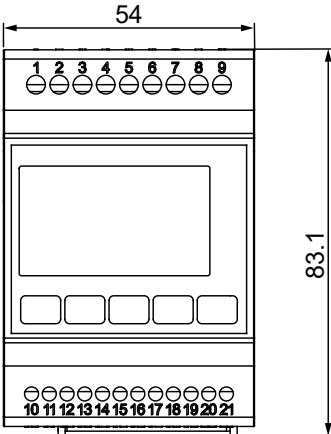

Current Transformer (CT)

- Accessories for current measurement, suitable for all types of power meters
- Proportionally transforms high circuit current into low current (or low voltage) signals for current measurement

Applications

Matches with all types of power meters to transform high current into measurable low current (voltage)

Product Information (Refer to Ordering Information for more details)

Type	Model	Features
Solid Core CT 	DCT-MC	• Installation through the CT core • Applicable to new system configuration
Compact Split Core CT 	DCT-CS	• Compact size, easy to install/dismantle by opening the split top • Suitable for various applications
	DCT-MV	
Split Core CT 	DCT-S	• Easy to install/dismantle by opening the split top • Complies with safety certifications
Split Core Hall CT 	DCT-HA	• For DC current measurement. Easy to install/dismantle by opening the split top

Ordering Information

Panel Mount Type Power Meter

Model		Functions (Refer to Technical Specs. for details)	Front Panel Dimensions (mm)	Current Measurement	I/O	Communication	Certifications	
Advanced Type	DPM-C530	Electrical parameters measurement (Active energy accuracy Class 0.5S)	96 x 96	Through external CT (secondary side): 1A/5A		RS-485 (Modbus/ BACNet MS/TP)	CE/UL/RCM	
	DPM-C530E	Multi-tariff energymeasurement				Ethernet x 2 (Modbus)	CE/UL	
	DPM-C530EM	Demand calculation						
	DPM-C532	Data recording			4DI/2DO			RS-485 (Modbus/ BACNet MS/TP)
	DPM-C532M	- Harmonics measurement - Multi-language display						
Standard Type	DPM-C520	- Electrical parameters measurement (Active energy accuracy 0.5%) - Harmonics measurement	96 x 96					
	DPM-C501L	- Electrical parameters measurement (Active energy accuracy 0.5%) - Harmonics measurement	96 x 96		4DI/2RO	RS-485 (Modbus)		
	DPM-C502	Data recording (C502 only)						
Basic Type	DPM-C510	Electrical parameters measurement (Active energy accuracy 0.5%)	96 x 96					CE/UL
	DPM-C510E					Ethernet (Modbus)		

DIN Rail Mount Type Power Meter

Model		Functions (Refer to Technical Specs. for details)	Current Measurement	I/O	Communication	Certifications
Advanced Type	DPM-D532I	- Electrical parameters measurement (Active energy accuracy 0.5%) - Multi-tariff power measurement	Direct measurement: 63A	2DI/2DO	RS-485 (Modbus)	CE/UL
	DPM-D533I	- Demand value calculation - Data recording - Harmonics measurement - Control power: 12 ~ 60 V_{DC} (D533I only)				
	DPM-D520I	- Electrical parameters measurement (Active energy accuracy 0.5%) - Demand value calculation - Data recording - Harmonics measurement				CE
	DPM-DA530	- Electrical parameters measurement (Active energy accuracy 0.5%) - Multi-tariff power measurement - Demand value calculation - Data recording - Harmonics measurement	Through external CT (secondary side): 1A/5A	1DO		
Basic Type	DPM-DA510	Electrical parameters measurement (Active energy accuracy 0.5%)				

Multi-Loop Type Power Meter

Model	Functions (Refer to Technical Specs. for details)	Current Measurement	I/O	Communication	Certifications
AC Meas. DPM-MA3222	- Electrical parameters measurement (Active energy accuracy 0.5%) - Circuit qty.: 8 (three-phase) / 24 (single-phase) - Data recording - Harmonics measurement	Through external CT - Main circuit: 5 A (secondary side) - Subcircuit: 333 mV (secondary side)	2DI 4RO 1PO	RS-485 (Modbus)	CE
DC Meas. DPM-MA1121	- Electrical parameters measurement (Active energy accuracy 0.5%) - Circuit qty.: 5 - Data recording	Through Hall Sensor			

Solid Core CT

Model	Certification	Primary Current	Secondary Current	Max. Load	Measurement Accuracy (PF=1)	Dimensions (Unit: mm)
DCT-MC010-5	-	100 A	5 A	1 VA	1%	Outer: 80x60x38 Inner: 20x30.5
DCT-MC020-5	-	200 A	5 A	1.5 VA	0.5%	
DCT-MC030-5	-	300 A	5 A	5 VA	0.5%	Outer: 98x74.5x43 Inner: 42x42
DCT-MC040-5	-	400 A	5 A	7.5 VA	0.5%	
DCT-MC050-5	-	500 A	5 A	5 VA	0.5%	Outer: 127x103x45 Inner: 51x61
DCT-MC060-5	-	600 A	5 A	10 VA	0.5%	

Compact Split Core CT

Model	Certification	Primary Current	Secondary Current	Wiring Length	Measurement Accuracy (PF=1)	Dimensions (Unit: mm)
DCT-CS010-5	-	100 A	5 A	1,000 mm	1%	Outer: 66.8x49.8x34.2 Inner: 23.8x25.2
DCT-CS020-5	-	200 A	5 A	1,000 mm	1%	
DCT-CS030-5	-	300 A	5 A	1,000 mm	1%	
DCT-CS040-5	-	400 A	5 A	1,000 mm	1%	Outer: 85x69x42.5 Inner: 36.5x36.5
DCT-CS050-5	-	500 A	5 A	1,000 mm	1%	
DCT-CS060-5	-	600 A	5 A	1,000 mm	1%	

Compact Split Core CT (333 mV output. Used with DPM-MA3222)

Model	Certification	Primary Current	Output Voltage	Wiring Length	Measurement Accuracy (PF=1)	Dimensions (Unit: mm)
DCT-MV005-3	CE	5 A	333 mV	2,000 mm	1%	Outer: 30.8x28.8x42.8 Inner: Φ10.2
DCT-MV060-3	CE	60 A		2,000 mm	0.5%	Outer: 30.3x33.9x49 Inner: Φ16.1
DCT-MV100-3	CE	100 A		2,000 mm	0.5%	
DCT-MV200-3	CE	200 A		2,000 mm	0.5%	Outer: 53.3x40.2x70 Inner: Φ24.1
DCT-MV300-3	CE	300 A		2,000 mm	0.5%	Outer: 67x42.8x83 Inner: Φ35
DCT-MV400-3	CE	400 A		2,000 mm	0.5%	
DCT-MV600-3	CE	600 A		2,000 mm	0.5%	Outer: 87.2x51x112.6 Inner: Φ50
DCT-MV800-3	CE	800 A		2,000 mm	0.5%	

Split Core CT

Model	Certification	Primary Current	Secondary Current	Max. Load	Measurement Accuracy (PF=1)	Dimensions (Unit: mm)
DCT-S201B	UL	100 A	5 A	1.0 VA	1.0%	Outer: 90 x 40 x 110 Inner: 30 x 20
DCT-S211B	UL	200 A	5 A	1.0 VA	0.5%	
DCT-S221B	UL	300 A	5 A	1.5 VA	0.5%	
DCT-S231B	UL	400 A	5 A	1.5 VA	0.5%	Outer: 115 x 37 x 159 Inner: 80 x 50
DCT-S241B	UL	500 A	5 A	2.5 VA	0.5%	
DCT-S251B	UL	600 A	5 A	2.5 VA	0.5%	
DCT-S261B	UL	750 A	5 A	2.5 VA	0.5%	
DCT-S2C1B	UL	800 A	5 A	3.75 VA	0.5%	
DCT-S271B	UL	1,000 A	5 A	5 VA	0.5%	
DCT-S301C	CE	100 A	5A	1.5VA	1.0%	Outer: 89 x 40 x 115 Inner: 32 x 21
DCT-S211C	CE	200 A	5A	1.0VA	0.5%	
DCT-S221C	CE	300 A	5A	1.5 VA	0.5%	
DCT-S231C	CE	400 A	5A	2.5 VA	0.5%	
DCT-S241C	CE	500 A	5A	2.5 VA	0.5%	Outer: 116 x 51 x 145 Inner: 80 x 50
DCT-S251C	CE	600 A	5A	2.5 VA	0.5%	
DCT-S261C	CE	750 A	5A	3 VA	0.5%	
DCT-S271C	CE	1,000 A	5A	5 VA	0.5%	
DCT-S281C	CE	1,500 A	5A	7.5 VA	0.5%	Outer: 146 x 51.6 x 196 Inner: 80 x 122
DCT-S291C	CE	2,000 A	5A	10 VA	0.5%	Outer: 186 x 67 x 250 Inner: 81 x 160.5
DCT-S2A1C	CE	2,500 A	5A	15 VA	0.5%	
DCT-S2B1C	CE	3,000 A	5A	20 VA	0.5%	

Split Core Hall CT (Used with DPM-MA1121)

Model	Certification	Primary Current	Output Voltage	Power Voltage	Measurement Accuracy (PF=1)	Dimensions (Unit: mm)
DCT-HA050-4	CE	5 A	$\pm 4 V_{DC}$	$\pm 12 V \sim \pm 15 V$	1.0%	Outer: 60 x 16 x 61 Inner: $\Phi 21$
DCT-HA100-4	CE	100 A	$\pm 4 V_{DC}$	$\pm 12 V \sim \pm 15 V$	1.0%	
DCT-HA200-4	CE	200 A	$\pm 4 V_{DC}$	$\pm 12 V \sim \pm 15 V$	1.0%	
DCT-HA300-4	CE	300 A	$\pm 4 V_{DC}$	$\pm 12 V \sim \pm 15 V$	1.0%	Outer: 76 x 16 x 84 Inner: $\Phi 35$
DCT-HA400-4	CE	400 A	$\pm 4 V_{DC}$	$\pm 12 V \sim \pm 15 V$	1.0%	
DCT-HA500-4	CE	600 A	$\pm 4 V_{DC}$	$\pm 12 V \sim \pm 15 V$	1.0%	
DCT-HA01K-4	CE	1,000 A	$\pm 4 V_{DC}$	$\pm 12 V \sim \pm 15 V$	1.0%	Outer: 100 x 24 x 100 Inner: $\Phi 50$

Hall Sensor Power Supply

Model	Input Voltage		Output		Ripple & Noise (mVp-p, Typ./Max.)	Efficiency (% , @ Full load)	Dimensions (mm)
	Normal (V_{DC} , Range)	Max. (V_{DC})	Voltage (V_{DC})	Current (mA, Max./Min.)			
DPM-PS01	48 (36 ~ 72)	80	± 15	$\pm 100 / \pm 5$	40 / 75	80	65.5 x 26 x 81





Smarter. Greener. Together.

Industrial Automation Headquarters

Taiwan: Delta Electronics, Inc.

Taoyuan Technology Center
No.18, Xinglong Rd., Taoyuan District,
Taoyuan City 330477, Taiwan
TEL: +886-3-362-6301 / FAX: +886-3-371-6301

Asia

China: Delta Electronics (Shanghai) Co., Ltd.

No.182 Minyu Rd., Pudong Shanghai, P.R.C.
Post code : 201209
TEL: +86-21-6872-3988 / FAX: +86-21-6872-3996
Customer Service: 400-820-9595

Japan: Delta Electronics (Japan), Inc.

Industrial Automation Sales Department
4-11-25, Shibaura, Minato-ku, Tokyo 108-0023, Japan
TEL: +81-3-6811-5470 / FAX: +81-3-6811-5802

Korea: Delta Electronics (Korea), Inc.

1511, 219, Gasan Digital 1-Ro., Geumcheon-gu,
Seoul, 08501 South Korea
TEL: +82-2-515-5305 / FAX: +82-2-515-5302

Singapore: Delta Energy Systems (Singapore) Pte Ltd.

4 Kaki Bukit Avenue 1, #05-04, Singapore 417939
TEL: +65-6747-5155 / FAX: +65-6744-9228

India: Delta Electronics (India) Pvt. Ltd.

Plot No.43, Sector 35, HSIIDC Gurgaon,
PIN 122001, Haryana, India
TEL: +91-124-4874900 / FAX: +91-124-4874945

Thailand: Delta Electronics (Thailand) PCL.

909 Soi 9, Moo 4, Bangpoo Industrial Estate (E.P.Z),
Pattana 1 Rd., T.Phraksa, A.Muang,
Samutprakarn 10280, Thailand
TEL: +66-2709-2800 / FAX: +66-2709-2827

Australia: Delta Electronics (Australia) Pty Ltd.

Unit 2, Building A, 18-24 Ricketts Road,
Mount Waverley, Victoria 3149 Australia
Mail: IA.au@deltaww.com
TEL: +61-1300-335-823 / +61-3-9543-3720

Americas

USA: Delta Electronics (Americas) Ltd.

5101 Davis Drive, Research Triangle Park, NC 27709, U.S.A.
TEL: +1-919-767-3813

Brazil: Delta Electronics Brazil Ltd.

Estrada Velha Rio-São Paulo, 5300 Eugênio de
Melo - São José dos Campos CEP: 12247-004 - SP - Brazil
TEL: +55-12-3932-2300 / FAX: +55-12-3932-237

Mexico: Delta Electronics International Mexico S.A. de C.V.

Gustavo Baz No. 309 Edificio E PB 103
Colonia La Loma, CP 54060
Tlalnepantla, Estado de México
TEL: +52-55-3603-9200

EMEA

EMEA Headquarters: Delta Electronics (Netherlands) B.V.

Sales: Sales.IA.EMEA@deltaww.com
Marketing: Marketing.IA.EMEA@deltaww.com
Technical Support: iatechnicalsupport@deltaww.com
Customer Support: Customer-Support@deltaww.com
Service: Service.IA.emea@deltaww.com
TEL: +31(0)40 800 3900

BENELUX: Delta Electronics (Netherlands) B.V.

Automotive Campus 260, 5708 JZ Helmond, The Netherlands
Mail: Sales.IA.Benelux@deltaww.com
TEL: +31(0)40 800 3900

DACH: Delta Electronics (Netherlands) B.V.

Coesterweg 45, D-59494 Soest, Germany
Mail: Sales.IA.DACH@deltaww.com
TEL: +49 2921 987 238

France: Delta Electronics (France) S.A.

ZI du bois Challand 2, 15 rue des Pyrénées,
Lisses, 91090 Evry Cedex, France
Mail: Sales.IA.FR@deltaww.com
TEL: +33(0)1 69 77 82 60

Iberia: Delta Electronics Solutions (Spain) S.L.U

Ctra. De Villaverde a Vallecas, 265 1º Dcha Ed.
Hormigueras - P.I. de Vallecas 28031 Madrid
TEL: +34(0)91 223 74 20
Carrer Llacuna 166, 08018 Barcelona, Spain
Mail: Sales.IA.Iberia@deltaww.com

Italy: Delta Electronics (Italy) S.r.l.

Via Meda 2-22060 Novedrate(CO)
Piazza Grazioli 18 00186 Roma Italy
Mail: Sales.IA.Italy@deltaww.com
TEL: +39 039 8900365

Turkey: Delta Greentech Elektronik San. Ltd. Sti. (Turkey)

Şerifali Mah. Hendem Cad. Kule Sok. No:16-A
34775 Ümraniye - İstanbul
Mail: Sales.IA.Turkey@deltaww.com
TEL: + 90 216 499 9910

MEA: Eltek Dubai (Eltek MEA DMCC)

OFFICE 2504, 25th Floor, Saba Tower 1,
Jumeirah Lakes Towers, Dubai, UAE
Mail: Sales.IA.MEA@deltaww.com
TEL: +971(0)4 2690148