


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by Degson. All rights reserved for patent. Utility model or design registrations. 除专利、实用新型、外观设计、发明专利外，其余权利均归德松公司所有。未经授权，禁止复制或传播本文件内容。所有权利保留。


未注公差/General tolerances (mm)												0.1/10 ±2'		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

额定电流/Rated current	6A
额定电压/Rated voltage	250VAC
线圈/触点介质耐压/Coil/Contact dielectric voltage	3000V/S
触点间介质耐压/Dielectric voltage between contact	2500V/S
螺钉扭矩/Screw torque	1.0N/m
外连接导线/External connection wire	20-14 /0.5-2.5WG/Mm ²
环境温度/Ambient temperature	-40 ~ +85 °C
重点管控符号/Key controlled symbol	*
包装规范/Packaging specification	SOP-Y-3342
符合 RoHS 环保要求/Conform to RoHS	
印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking, printing content is clear, no broken line, ect	
印字面按图中脚位参考/Seal literal reference according to the foot position in the drawing	

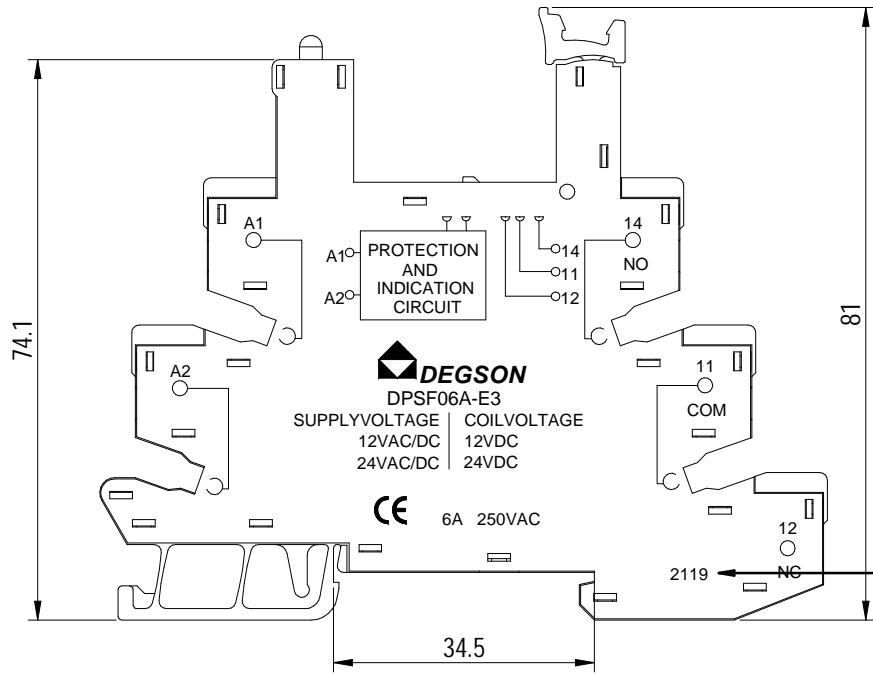

备注：1个产品配有1个附件，如下图所示；

2021年第19周生产，仅供参考。

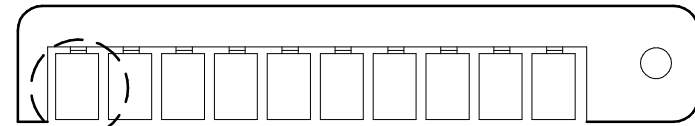

白色标示板，每个产品1PCS

DEGSON			MATERIAL:	SURFACE/COLOR:		
			MAT NO./REV: 30020000065-1 / 00	MAT STATUS: 停产		
APPD: LGL	2024.02.26	NAME				
CHKD: MEK	2024.02.26	DPSF06A-E3-00Z (H)				
DRFT: GXJ	2024.02.23					
DRAWING NO. 200269597		TYPE CUSTOMER DRAWING		DRAWING STATUS 已发布		SCALE 2:1
SHEET 1/1						

00	/	新图纸下发	GXJ	2024.02.23
REV	ECN	DESCRIPTION	DRFT	DATE

