
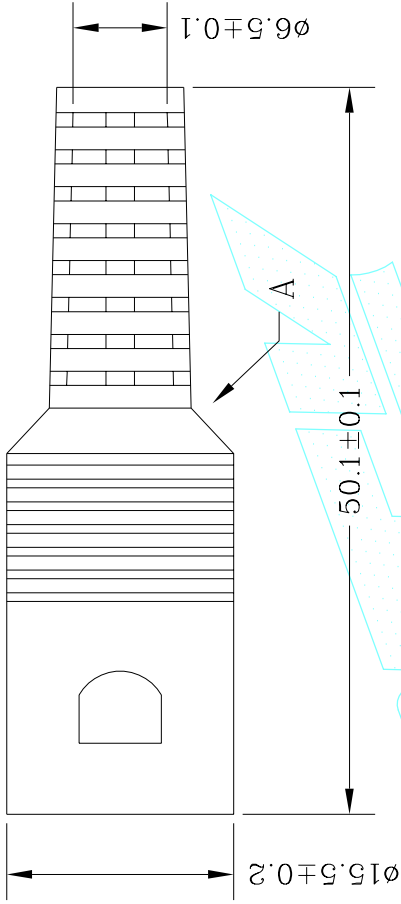


REV		ECN NO.	DESCRIPTION	DATE
A	GTKSD0108	RELEASE	MAR.28.02	
B		ADD. SAFETY	JAN.27.04	

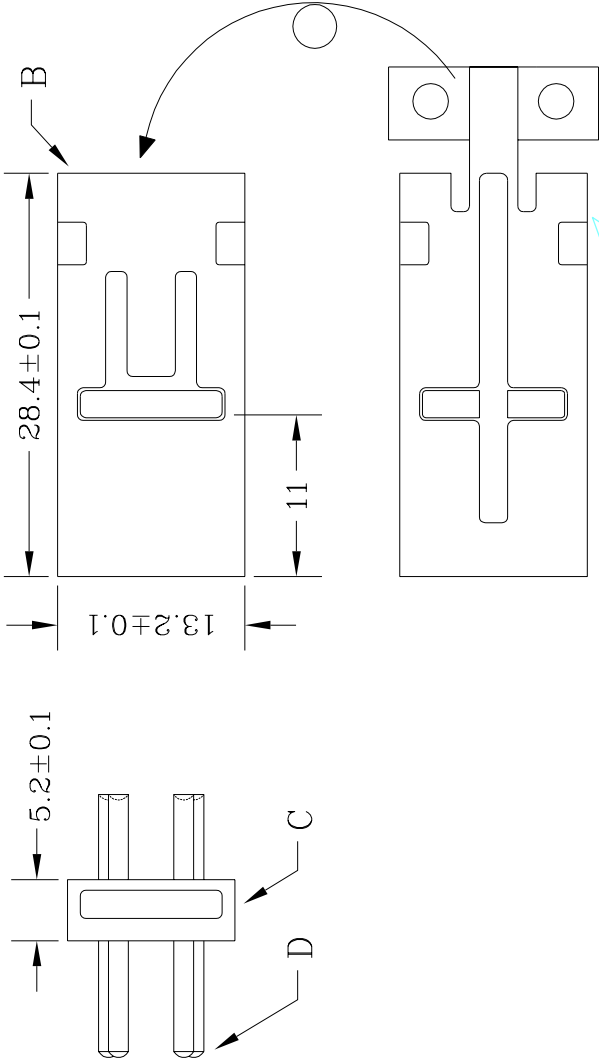

FRONT VIEW

3P 180°	4P 210°	5P 180°	5P 240°	5P 360°	6P 240°	7P 270°	8P 270°	8P 262°
DP3SA	DP4SA	DP5SA	DP5SA/240	DP5SA/360	DP6SA	DP7SA	DP8SA	DP8SA/262

MATERIALS:

A.BOOT:PVC

B.METAL PART:STEEL NICKEL PLATED

C.INSULATOR:PBT

D.PIN CONTACT:BRASS NICKEL PLATED

SPECIFICATIONS:

1.RATING:100V AC AT 1A

2.INSULATION RESISTANCE:OVER 100MΩ AT 500V DC

3.DIELECTRIC STRENGTH:250V AC FOR ONE MINUTE

4.CONTACT RESISTANCE:10mΩ MAX.

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	
LINEAR	ANGLE	UNITS	
X. ±	X° ±	MM	
X. ±	X° ±	MM	
.XX ±	.XX° ±	SCALE	
.XXX±	.XXX°±	SCALE	
APPD		SIZE	
CHKD		SIZE	
DRAW	Z.	JAN. 27' 2004	A4



GOLD-TEK

ELECTRIC CO., LTD.

PART NO.		PART NO.	
DIN PLUG	DP*SA (/240)	CAD NO.	I287
ASSEMBLY TYPE	F:\Drw\PH\PH-0143	SHEET	1 OF 1
IPART NO	46000SER		

圖面編號:GTKSD0949-B(1)