


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUN. 21'05

**MATERIALS:**

INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0  
 COLOR: BLACK  
 CONTACTS:BRASS OR PHOSPHOR BRONZE,  
 GOLD FLASH OVER NICKEL  
 ELECTRICAL:  
 CURRENT RATING:1AMP.  
 INSULATION RESISTANCE:1000M Ω MIN.  
 DIELECTRIC WITHSTANDING:500VAC  
 OPERATING TEMPERATURE:-55°C~+105°C

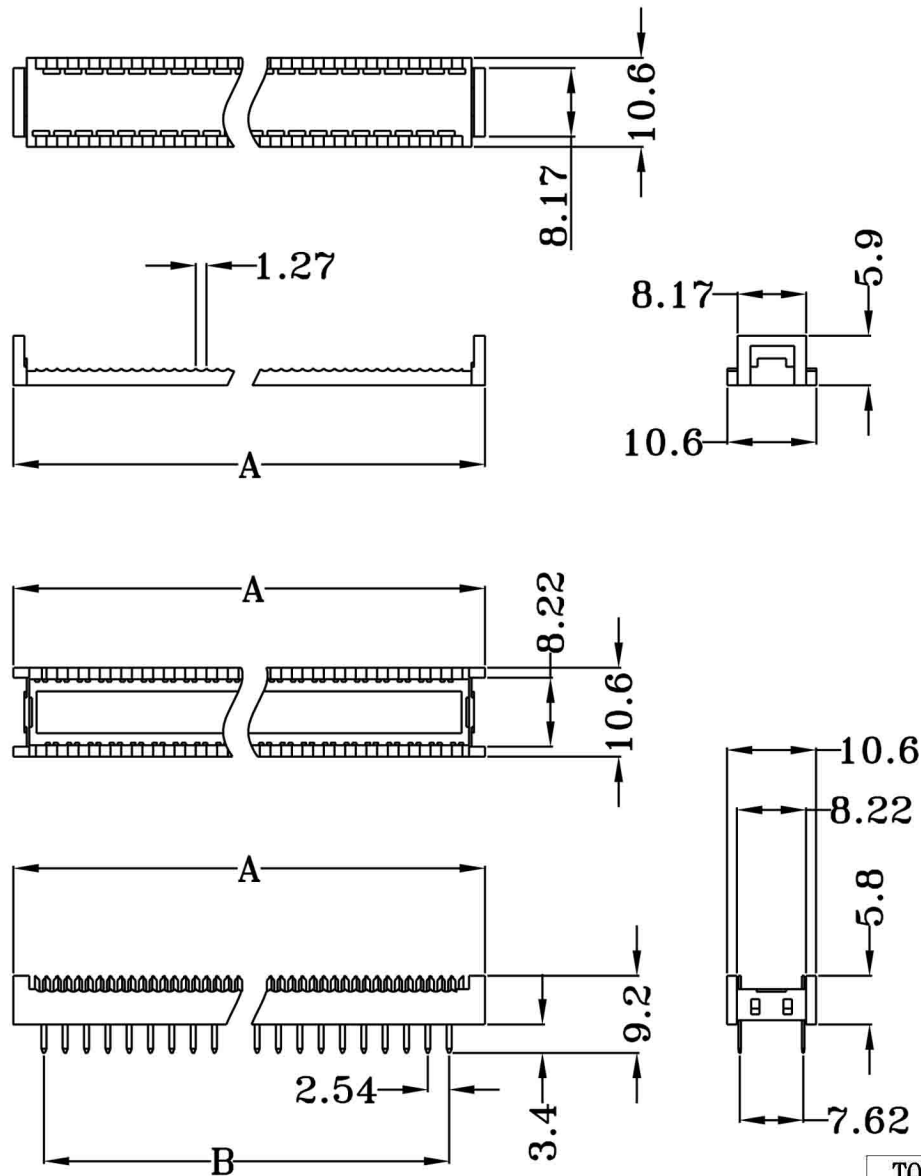

CONTACTS	A	B
08P	15.45	07.62
10P	17.95	10.16
14P	23.05	15.24
16P	25.50	17.78
18P	28.12	20.32
20P	30.68	22.86
24P	35.80	27.94
28P	40.81	33.02
40P	56.15	48.26

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION		GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE			TITLE	PART NO.
X. ±	X° ±	UNITS	DIP PLUG	DP**TW1	
.X ± 0.30	.X° ±	MM	2.54mm x 7.62mm	CAD NO. I104	
.XX ± 0.20	.XX° ±	SCALE	CPART NO.	SHEET	
.XXX ±	.XXX° ±	SIZE		F:\PDF\PH\PH-0234	
APPD		A4		1 OF 1	
CHKD					
DRAW	Z	JUN. 21'2005			

圖面編號:GTKSD1512-A(1)