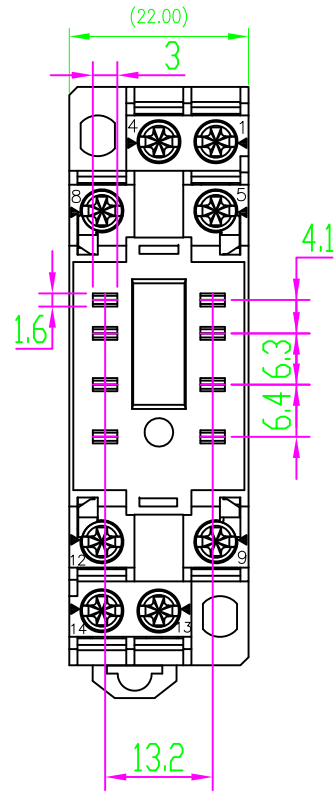
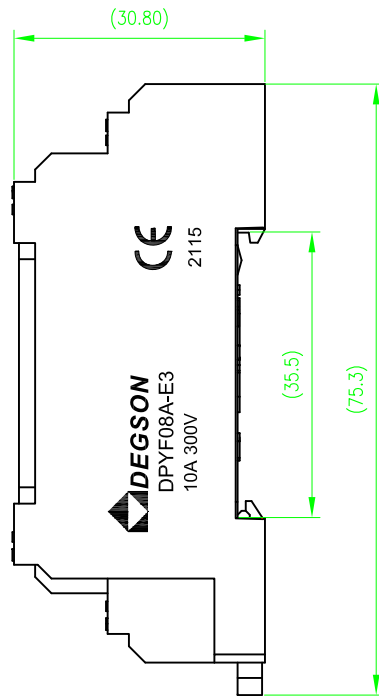



尺寸公差(mm)					0.05/10 ±1°
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	

额定电流/Rated current	10A
额定电压/Rated voltage	300V
线圈/触点介质耐压/Coil/Contact dielectric voltage	2000V/S
触点间介质耐压/Dielectric voltage between contact	2000V/S
螺钉扭矩/Screw torque	1.0Nm
外连接导线/External connection wire	20-14/0.5-2.5W G/mm ²
环境温度/Ambient temperature	-40~+65℃
重点管控符号/Key controlled symbol	*
符合RoHS环保要求/Conform to RoHS	


印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking, printing content is clear, no broken line, ect

印字面按图中脚位参考/Seal literal reference according to the foot position in the drawing

备注: 1个产品配有2个附件, 如下图所示:



型号品名
额定电压、电流

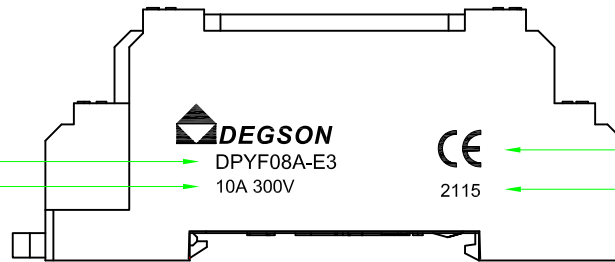

CE标志

2021年第15周生产, 仅供参考

1	DPYF08A-E3-00A(H)-N	30019000028	1		
NO.	DESCRIPTION	MATERIAL NO.	QTY	MATERIAL	NOTES

MATERIAL: /		SURFACE: /	
MAT.NO.: 30020000047		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD Description: DPYF08A-E3-00Z(H)	
STATUS: /			
APPD:			
CHKD:			
5	DRFT: long ZM 2021.5.6	DRAWING NO.: 30000355	REV 01
	 SIZE: A4  mm (inch)	TYPE: PRODUCT DRAWING	SCALE: 1:1 SHEET 1/1

01		修订线圈与触点耐压为: 3000V/S, 修订触点间耐压为: 2500V/S,	Luo DP	2021.07.15
REV	ECN	DESCRIPTION	DRFT	DATE