


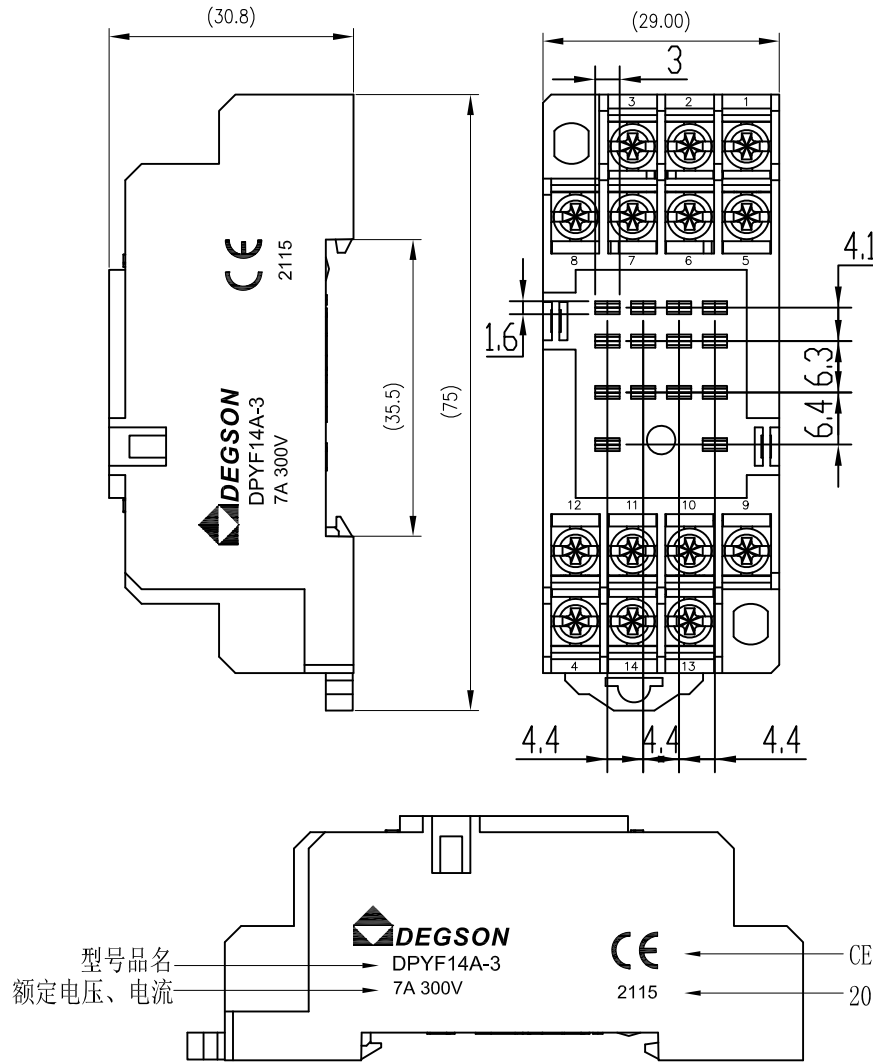

型号品名
额定电压、电流

DEGSON
DPYF14A-3
7A 300V

CE
2115

CE标志

2021年第15周生产, 仅供参考

尺寸公差(mm)


0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	0.05/10 ±1°
±0.20	±0.30	±0.50	±0.70	±1.00	


额定电流/Rated current	7A
额定电压/Rated voltage	300V
线圈/触点介质耐压/Coil/Contact dielectric voltage	2000V/S
触点间介质耐压/Dielectric voltage between contact	2000V/S
螺钉扭矩/Screw torque	1.0Nm
外连接导线/External connection wire	20-14/0.5-2.5W G/mm ²
环境温度/Ambient temperature	-40~+65℃
重点管控符号/Key controlled symbol	*
符合RoHS环保要求/Conform to RoHS	

印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking, printing content is clear, no broken line, ect

印字面按图中脚位参考/Seal literal reference according to the foot position in the drawing

备注: 1个产品配有2个附件, 如下图所示;



MATERIAL: /		SURFACE: /	
MAT.NO.: 30020000046	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD:	Description: DPYF14A-3-00A&Z(H)		
CHKD:			
DRFT: Huang XS 2022.04.27		DRAWING NO.: 200069532	REV 00
 SIZE: A4	 mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 1:1
		SHEET	1/1