
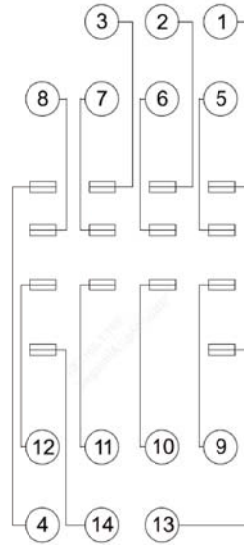
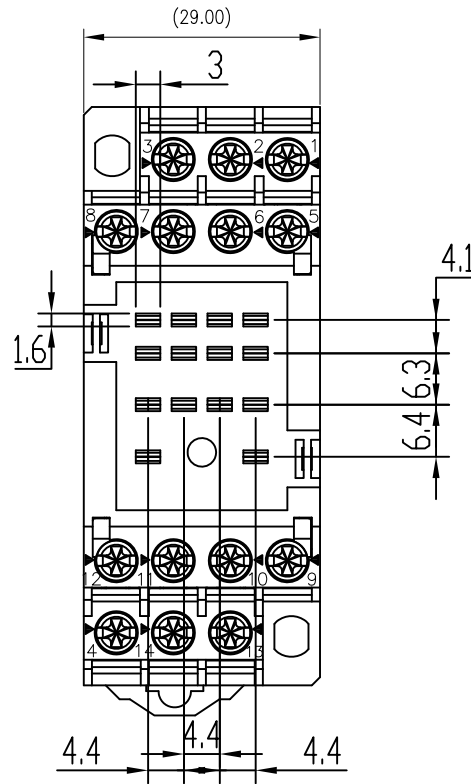


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交易本文件的内容。未经许可擅自复制或传播，侵犯者将承担法律责任。 实用新型和发明专利的所有权利。

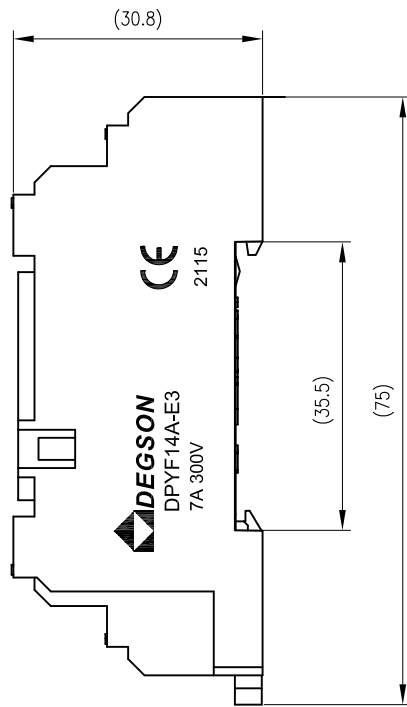



尺寸公差(mm)					0.05/10 ±T
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	

额定电流/Rated current	7A
额定电压/Rated voltage	300V
线圈/触点介质耐压/Coil/Contact dielectric voltage	3000V/S
触点间介质耐压/Dielectric voltage between contact	2500V/S
螺钉扭矩/Screw torque	1.0Nm
外连接导线/External connection wire	20-14/0.5-2.5W G/mm ²
环境温度/Ambient temperature	-40~+65℃
重点管控符号/Key controlled symbol	*
符合RoHS环保要求/Conform to RoHS	

印字为激光打标，印字内容清晰、无断线等/Printing for laser marking, printing content is clear, no broken line, ect

印字面按图中脚位参考/Seal literal reference according to the foot position in the drawing

备注：1个产品配有2个附件，如下图所示；

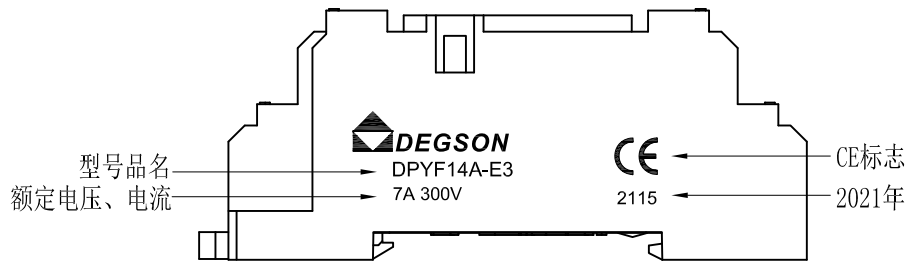

MATERIAL: /		SURFACE: /	
MAT.NO.: 30020000048		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD:		Description:	
CHKD:		DPYF14A-E3-00Z(H)	
DRFT: Huang XS 2022.04.27		DRAWING NO.: 200069534	
REV		REV	
ECN		ECN	
DESCRIPTION		DESCRIPTION	
DRFT		DRFT	
DATE		DATE	
SIZE: A4		SCALE: 1:1	
TYPE: CUSTOMER DRAWING		SHEET 1/1	