

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、域名权、其他知识产权等权利外，本公司保留对涉及发明、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、域名权、其他知识产权等权利的所有权利。

FOR-1755 Rev.1.6

2

3

4

5

6

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:

额定电压/电流/Rated Voltage(V)/Current(A)

B

300/20

C

300/20

D

600/5

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree

III/3

III/2

II/2

额定电压/电流/Rated Voltage(V)/Current(A)

500/20

/

/

额定脉冲电压(KV)/Rate Impulse Voltage(KV)

6

/

/

最大负载电流/Maximum load current

24A(具有4mm²导线横截面，
刚性 (with 4 mm² conductor
cross section, rigid))

线径范围(硬线和软线)/Wire Range(rigid and
flexible) (AWG/mm²)

26-12/0.2-2.5&4 (SOL)

线数范围/Poles




N=01P

使用温度范围/Operating temperature(°C)

-40~+105

符合RoHS环保要求/Conform to RoHS

Yes

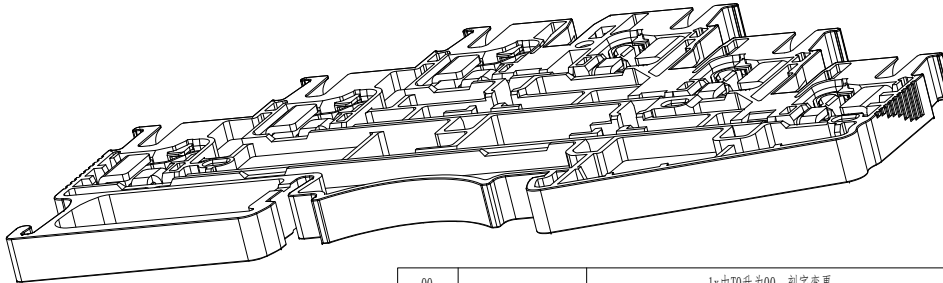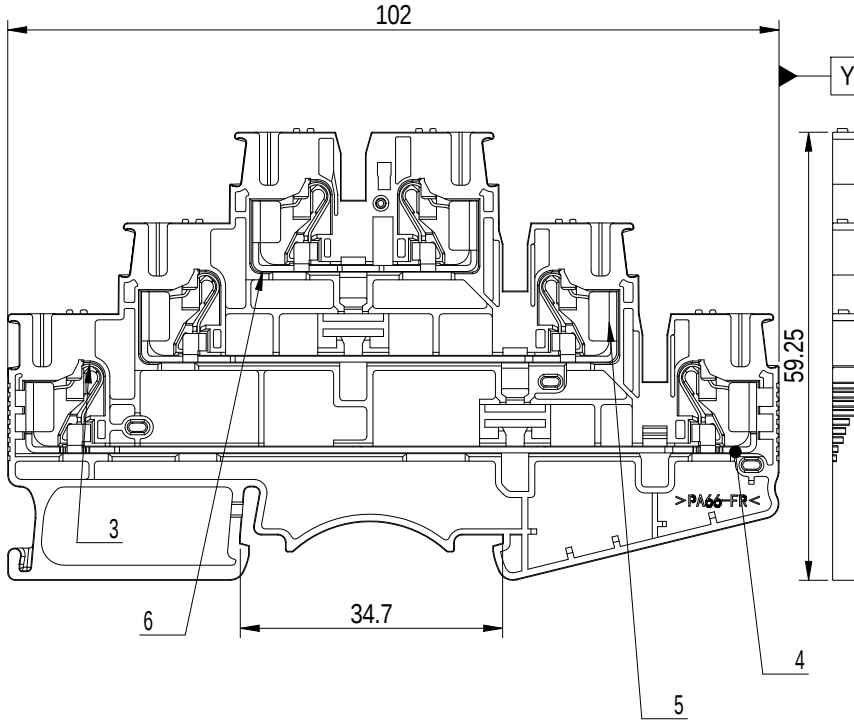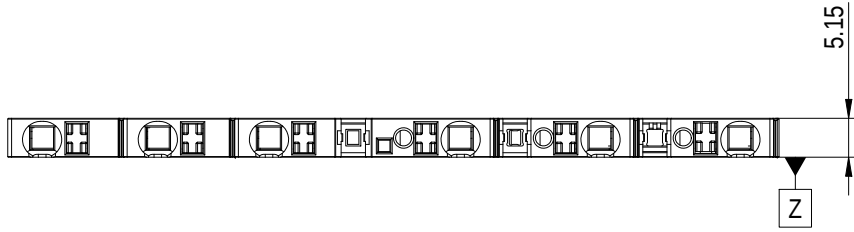

未标尺寸请参考3D文件



MATERIAL:

MAT NO./REV: 1104000125-1 / 00

SURFACE/COLOR:

MAT STATUS: 批量

APPD: 朱伟明

2022.06.02

CHKD: 张玉华

2022.05.31

DRFT: 阮帅帅

2022.05.31

DRAWING NO.

200074322

TYPE

CUSTOMER DRAWING

DRAWING STATUS

已发布

SCALE

2:1

SHEET

1/1

DS2.5-3L-01P-11-00Z(H)

6	Current carrier3	Copper	Sn Plated
5	Current carrier2	Copper	Sn Plated
4	Current carrier1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94 V-0
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES